

HFE82V-200W

DIRECT CURRENT RELAY



Features

- Hermetically sealed with ceramic brazing technology, without risk of arc leaking, no fire or explosion.
- Filled with hydrogen gas to prevent the oxidation and burnout of contacts; Low and stable contact resistance, with IP67 compliant.
- 200A continuous carry current capability at 85°C.
- Applicable to abnormal conditions, breaking capacity up to 7.5 times overcurrent
- Max. insulation resistance up to 1000MΩ (@1000 VDC), dielectric strength (coil-contact) up to 4kV, IEC 60664-1 compliant.

RoHS compliant

CONTACT DATA

Contact arrangement	1 Form A	
Contact resistance 1)	Main contact $\leq 0.3m\Omega$ (200A) Auxiliary contact $\leq 100m\Omega$ (0.5A)	
Contact rating	200A	
Mechanical endurance	2x10 ⁵ ops	
Max. switching voltage	1000 VDC	
Max. breaking current	2000A(450 VDC) 1 op	
Max. switching power	300kW	
	Type 450V	Type 750V
Electrical endurance 2)	Making:1x10 ⁵ ops (20VDC C=1500 μ F Inrush200A)	Making:1x10 ⁵ ops (20VDC C=1500 μ F Inrush200A)
	Breaking:5x10 ⁴ ops (450 VDC, 15A)	Breaking:100 ops (750 VDC, 200A)
	Breaking:1000 ops (450 VDC, 200A)	Breaking:1 op (750 VDC, 1500A)
	Breaking:1 op (450VDC, 2000A)	
	Short-circuit capacity: 6kA/450VDC 5ms No fire, no explosion	
Electrical endurance 2)	Type 1000V	
	Breaking:50 ops(1000 VDC, 100A)	
Current carrying 3) capacity	200A: Cont.	
	250A: 15min	
	320A: 5min	
	600A: 30s	
	900A: 10s	

Notes: 1) The above values are the initial values.

2) Unless otherwise specified, the temperature of electrical endurance is at 23°C and the on-off ratio is 0.6s:5.4s.

The coil was not connected to the surge suppression device during the test. Please note that the use of a well-connected diode will greatly increase the release time of the relay, resulting in a reduced lifetime.

3) Ambient temperature is at 85°C and cross section area of wire is 60mm² min. See Fig. Endurance Capacity Curve for more information.

COIL

23°C

Rated Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Coil power W
12	≤ 9	≥ 1	6
24	≤ 18	≥ 1	6

CHARACTERISTICS

Insulation resistance		1000MΩ(1000 VDC)
Dielectric strength	Between coil & contacts	4000 VAC 1min
	Between open contacts	3000 VAC 1min
	Between contacts & auxiliary contacts	3000 VAC 1min
Operate time (at rated volt.)		$\leq 30ms$
Release time (at rated volt.)		$\leq 10ms$
Shock resistance	Functional	196m/s ²
	Destructive	490m/s ²
Vibration resistance		10Hz ~ 500Hz 49m/s ²
Humidity		5% ~ 85% RH
Ambient temperature		-40°C ~ 85°C
Load terminal structure		M6 screw terminal female
Unit weight		Approx.400g
Outline Dimensions		89.0 x 43.0 x 77.3mm

Notes: The above values are the initial values measured at room temperature.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/EC 27001 CERTIFIED

2024 Rev.1.00

ORDERING INFORMATION

Type	HFE82 V -200W/ 12- H A- C 5 -1 (XXX)						
Application	V: Vehicle						
Contact rating	200: 200A						
Series breakdown	W: W series						
Load voltage	Nil:450VDC 750:750VDC 1000:1000VDC						
Coil voltage	12: 12 VDC 24: 24 VDC						
Contact arrangement	H: 1 Form A						
Auxiliary contact form	A: 1 Form A						
Coil terminal structure	C: Connector						
Load terminal structure	5: Screw terminal female						
Mounting	Nil: Vertical mounting						
Coil characteristic	1: Single coil						
Special code ¹⁾	XXX: Customer special requirement						


Notes: 1) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, MOUNTING HOLE, TERMINAL ARRANGEMENT

Unit: mm

Outline Dimensions


HFE82V-200W/XXX-12-HA-C5-1

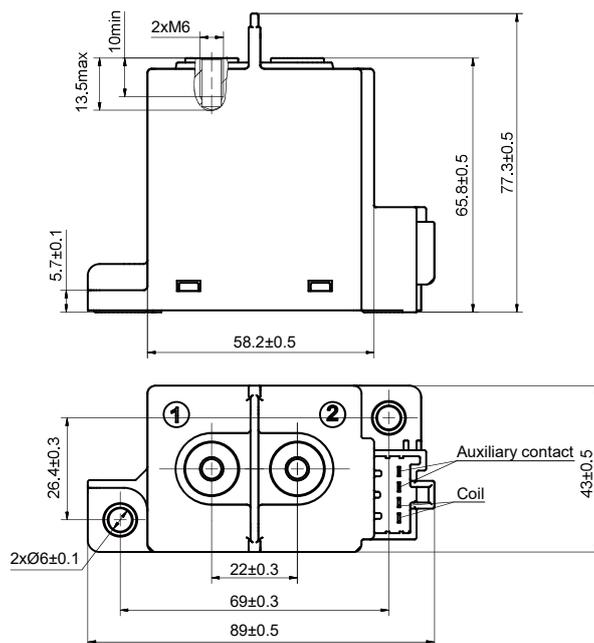


OUTLINE DIMENSIONS, MOUNTING HOLE, TERMINAL ARRANGEMENT

Unit: mm

Mounting Hole



Terminal Arrangement




Notes: No polarity on the load, auxiliary contacts and coil sides.

WIRING DIAGRAM


Unit: mm

C: Connector

(Configured by customers: THB:0488701)

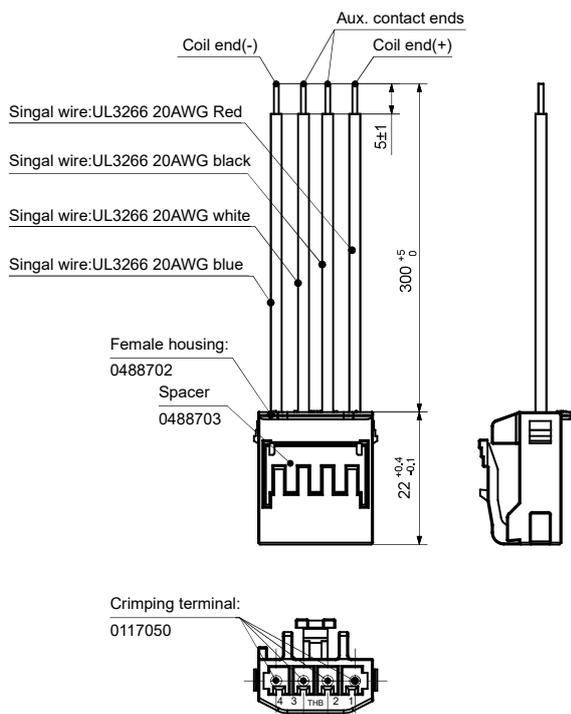


(Configured by customers: Yazaki-7283-1044)

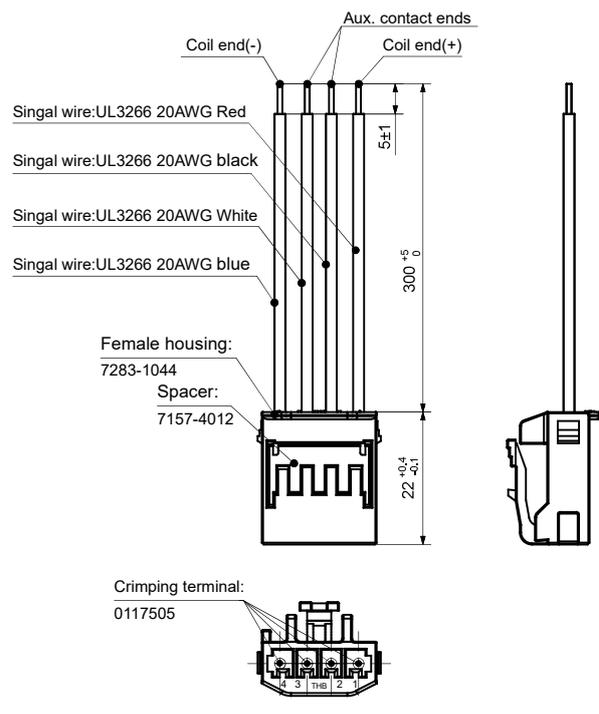

CHARACTERISTIC CURVES


Endurance Capacity Curve

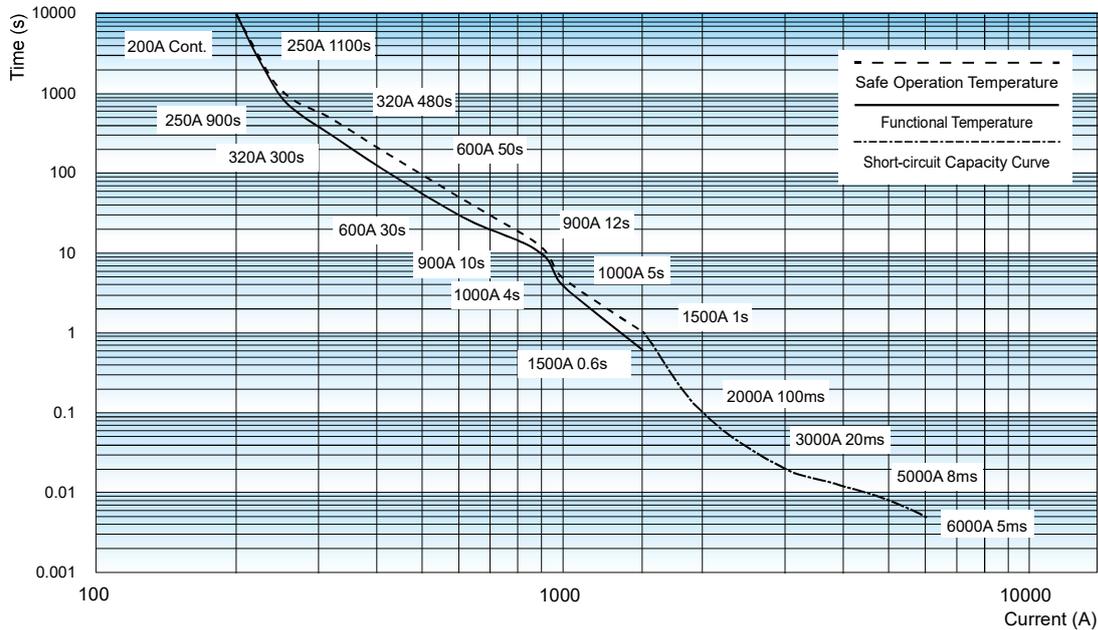

Notes:

- 1) The data is for design reference, it shall be verified as actual for model selection and fuse mating of short-circuit current test.
- 2) The upper temperature limit of safe operation and function are set for 180°C and 130°C respectively.
- 3) It is recommended that the upper temperature limit shall not exceed 130°C when long time operation. The relay may also fail, if the safe temperature limit of 180°C is exceeded.
- 4) Risks of fire and explosion may exist when the working condition beyond the safe circuit curve. in case of similar working condition, the relay shall be replaced in time.
- 5) The ambient temperature is 85°C for safe operation and function, and for current above 2000A, the temperature is room temperature with cross-sectional area $\geq 60\text{mm}^2$.
- 6) Even if it is below the safety curve when the current $\geq 1500\text{A}$, the relay is likely to be bonded during current carrying. If there is a break beyond the specification, fire and explosion may occur.
- 7) The contact will severely bounce off when the current $\geq 6000\text{A}$, which may cause the circuit current cannot continue to rise. If the fuse cannot be fused in time, the relay may explode and the arc may ignite the relay after the explosion.

Pick-up Voltage / Drop-out Voltage Curve

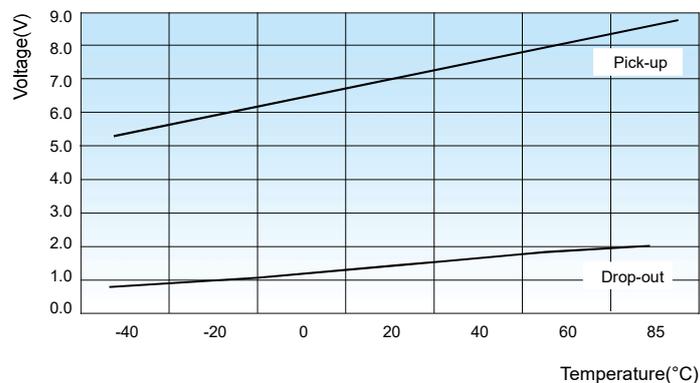

- Notes:**
- 1) The above values are sampling values for reference only;
 - 2) The rated voltage of the sample coil is 12VDC;
 - 3) The sampling ambient temperature is -40°C ~ 85°C.

CAUTIONS


1. In case of looseness, please use washer when install the relay with M5 screw, and the torque within 3N·m to 4N·m, The screw tightening torque at terminals shall be within 6N·m to 8N·m. The torque beyond the range may cause damage.

Mounting for load terminal				Mounting for relay body	
Mounting way	Torque requirement	Hole dia. of copper bus bar	Thickness of copper bus bar	Mounting way	Torque requirement
M6 Screw	6N·m ~ 8N·m	Ø6.0mm ~ Ø6.5mm	2mm ~ 3mm	M5 Screw	3N·m ~ 4N·m

2. Please tighten the load terminal of relay vertically with preloading first when installing. Repeat locking is not recommended.
3. If any special screws and nuts, such as nylok, are used when installing, it is recommended to contact and confirm with Hongfa.
4. If any special installation requirements, such as downward direction, multi busbar connection, are involved, it is recommended to contact and confirm with Hongfa.
5. Please avoid adhering to foreign matter such as grease on the terminal lead end and please use the conductor with min. cross section area of 60mm², otherwise it may cause the abnormal heating of the terminal part.
6. Cautions of mounting for relay body:



Unrecommended method

Large opening of mounting plate at customer-side.

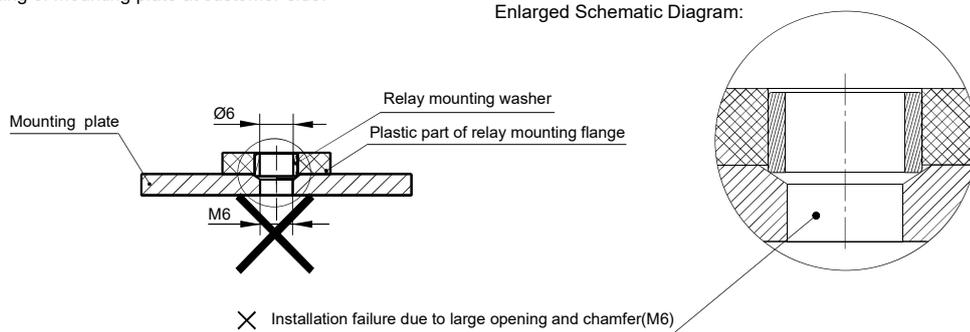

Recommended method

Appropriate opening (M5) of mounting plate at customer-side.

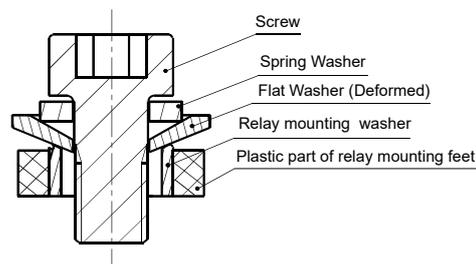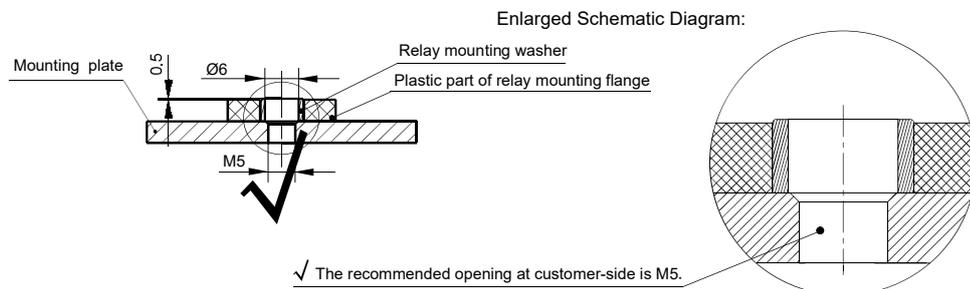

When use M5 screw, the thickness and strength of the washer needs to be guaranteed or it may deform and burst the cover.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co.,Ltd. All rights of Hongfa are reserved.