

HF166F

MINIATURE HIGH POWER LATCHING RELAY



File No.:E133481



File No.:R50280244



Features

- Latching relay
- 4mm contact gap available
- 25A switching capability
- 5kV dielectric strength(between coil and contacts)
- Creepage distance between coil and contacts:10mm
- Product in accordance to IEC 60335-1 available
- UL insulation system: Class F
- 1A + 1B configuration for power switching
- Flux proofed type available

CONTACT DATA

Contact arrangement	1A+1B
contact gap	4mm min.
Contact resistance ¹⁾	100mΩ max.(at 1A 6VDC)
Contact material	AgSnO ₂
Contact rating (Res. load)	25A 277VAC
Max. switching voltage	277VAC
Max. switching current	25A
Max. switching power	6925VA
Mechanical endurance	6 × 10 ⁵ OPS
Electrical endurance	3 × 10 ⁴ OPS (NO or NC, 25A 277VAC, Resistive load, at 85°C, 1s on 9s off)

Notes: 1) The data shown above are initial values.

COIL

Coil power	1 coil latching: 1.2W 2 coils latching: 2.4W
------------	---

COIL DATA

at 23°C

1 coil latching

Nominal Voltage VDC	Set Voltage VDC max.1)	Pulse width (ms) min.1)	Reset Voltage VDC max.1)	Coil Resistance Ω
5	4	150	4	20.8x (1±10%)
6	4.8	150	4.8	30x (1±10%)
12	9.6	150	9.6	120x (1±10%)
24	19.2	150	19.2	480x (1±10%)
48	38.4	150	38.4	1920x (1±10%)

2 coils latching

Nominal Voltage VDC	Set Voltage VDC max.1)	Pulse width (ms) min.1)	Reset Voltage VDC max.1)	Coil Resistance Ω
5	4	150	4	10.4x (1±10%)
6	4.8	150	4.8	15x (1±10%)
12	9.6	150	9.6	60x (1±10%)
24	19.2	150	19.2	240x (1±10%)
48	38.4	150	38.4	960x (1±10%)

Notes: 1) The data shown above are initial values.

SAFETY APPROVAL RATINGS

UL/CUL	25A 277VAC/250VAC/125VAC at 85°C 25A 60VDC at 85°C 0.5A 240VDC at 85°C
TÜV	25A 400VDC, at 85°C,ON:5S,OFF:5S, Contacts break without load 70A 72VDC, at 85°C,ON:0.3S,OFF:9S, Contacts break without load NO:25A 277VAC/250VAC/125VAC at 85°C 25A 60VDC at 85°C 0.5A 240VDC at 85°C

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2023 Rev. 1.00

ORDERING INFORMATION

	HF166F /	12	-1HD	L2	T	(XXX)
Type						
Coil voltage	5, 6, 12, 24, 48VDC					
Contact arrangement	1HD: 1A + 1B					
Sort	L1:1 coil latching L2: 2 coils latching					
Contact material	T: AgSnO ₂					

Special code³⁾

XXX: Customer special requirement


Nil: Standard

- Notes:**
- 1) Flux-proofed relays can not be used in the environment with pollutants like H₂S, SO₂, NO₂, dust, etc.
 - 2) Water cleaning or surface process is not suggested after the flux-proofed relays are assembled on PCB.
 - 3) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions

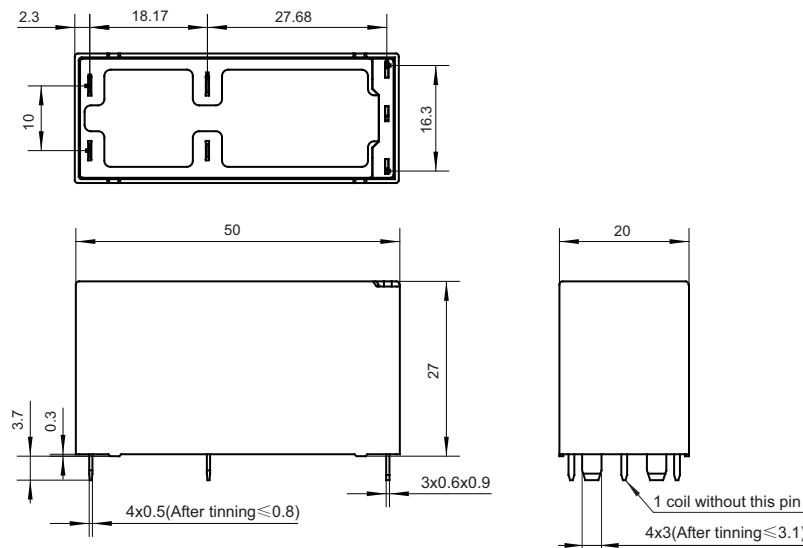


Wiring Diagram(Bottom view)

1 coil latching




2 coils latching



OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


PCB Layout
(Bottom view)

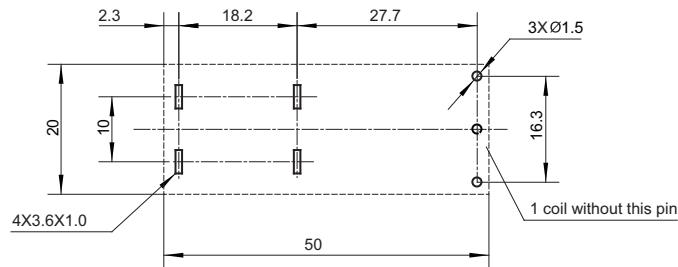

- Remark:
- 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 - 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.
 - 3) The width of the gridding is 2.52mm.

CHARACTERISTIC CURVES

SET \ RESET TIME AND VOLTAGE CURVE

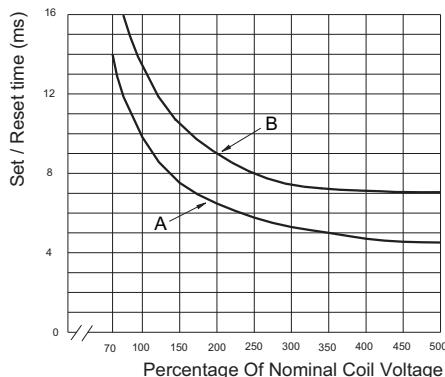

Notes:

- Curve B: max value
Curve A: typical value

Notice

1. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
2. In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage, impulse width should be more than 150 ms. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
3. Keep the product away from strong magnetic field during transportation, storage and application, to avoid change of set/reset voltage.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.