

# HF189F

# MINIATURE HIGH POWER RELAY



认证号:E133481



认证号:R 50493573



## Features

- With auxiliary monitoring contact, Detection of main contact welding makes it possible to construct a safety circuit (according to IEC 61810-3)
- Contact gap: 2.25mm
- Main Contact Resistance to Short Circuit Current (according to IEC 62752 1.5kA 6kA<sup>2</sup>s)
- 4kV Dielectric strength (Between Main contact & coil)
- UL insulation system: Class F available

RoHS compliant

## CONTACT DATA

Contact arrangement	1A(Main contact)+1B(Auxiliary contact)
Contact resistance <sup>1)</sup>	Main contact ≤ 10mΩ(6VDC 20A)
Contact material	Main contact: AgSnO <sub>2</sub> Auxiliary contact: AgNi
Contact clearance	Main contact ≥ 2.25mm
Contact rating (resistance)	Main contact: Making 10A, Loading 48A, Breaking 10A 277VAC, Auxiliary contact: 1A 12VDC
Max. switching voltage	Main contact: 600VAC
Max. switching current	Main contact: 48A Auxiliary contact: 1A
Max. switching power	Main contact: 13296VA Auxiliary contact: 12W
Min. switching load <sup>2)</sup> (Auxiliary contact)	NC: 100mA 12VDC NC(Gold plated): 10mA 12VDC
Mechanical endurance	1×10 <sup>5</sup> ops
Electrical endurance	Main contact ≥ 5×10 <sup>4</sup> ops (85°C, 1s on 9s off, Making 10A, Loading 48A, Breaking 10A 277VAC, Resistive load)

Notes: 1) The data shown above are initial values.

2) Min. contact load is reference value. Please perform the confirmation test with the actual load before usage since reference value may change according to switching frequencies, environmental conditions and expected life cycles.

## CHARACTERISTICS

Insulation resistance		1000MΩ(500VDC)
Dielectric strength	Between coil & Main contact	4000VAC 1min
	Between open Main contact	2500VAC 1min
	Between Main contact & Auxiliary contact	4000VAC 1min
	Between coil & Auxiliary contact	2000VAC 1min
Surge Voltage (Between coil & Main contacts)		10kV(1.2/50μs)
Operate time (at nomi. volt.)		30ms Max.
Release time (at nomi. volt.)		20ms Max.
Temperature rise		70K max. (Rated voltage excitation will reach hold voltage, at 85°C)
Shock resistance	Functional	Main contact: 10g
	Destructive	Main contact: 100g
Vibration resistance		Main contact: 10Hz to 55Hz DA 1.5mm
Humidity		5% to 85%RH
Ambient temperature		-40°C to 85°C (Apply holding voltage to coil)
Termination		PCB
Unit weight		Approx. 66g
Construction		Flux proofed

Notes: 1) The data shown above are initial values.

## COIL DATA

23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC <sup>1)</sup>	Coil Resistance Ω
5	3.50	0.30	5.5	13×(1±10%)
9	6.30	0.45	9.9	42.2×(1±10%)
12	8.40	0.60	13.2	75×(1±10%)
18	12.6	0.90	19.8	168.8×(1±10%)
24	16.8	1.20	26.4	300×(1±10%)
48	33.6	2.40	52.8	1200×(1±10%)

Notes: 1) The data shown above are initial values.

2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

## COIL

Coil power	Approx. 1.92W
Holding voltage <sup>1)</sup>	35% to 100%U <sub>N</sub> (at 23°C) 45% to 55%U <sub>N</sub> (at 85°C)

Notes: 1) The coil holding voltage is the voltage applied to coil 100ms after the rated voltage.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2023 Rev. 1.00

## SAFETY APPROVAL RATINGS

UL/CUL <sup>3)</sup>	Main contact: Making 10A, Loading 48A, Breaking 10A, 277VAC/600VAC, 85°C, 1s on 9s off, 5×10 <sup>4</sup> ops Main contact: Making 48A, Breaking 10A, 277VAC/600VAC, 85°C, 1s on 9s off, 5×10 <sup>4</sup> ops
TUV	Main contact: Making 10A, Loading 48A, Breaking 10A, 277VAC/600VAC, 85°C, 1s on 9s off, 5×10 <sup>4</sup> ops Main contact: Making 48A, Breaking 10A, 277VAC/600VAC, 85°C, 1s on 9s off, 5×10 <sup>4</sup> ops

Notes: 1) All values unspecified are at room temperature.

2) Only some typical rating are listed above. If more details are required, please contact us.

3) Suitable for overvoltage category III, and shall provide protection for a rated impulse withstand voltage peak of 6 kv.

## ORDERING INFORMATION

Type	HF189F/	12	-H	B	T	F	(XXX)
Coil voltage	5,9,12,18,24,48 VDC						
Main contact arrangement	H:1 Form A						
Auxiliary contact arrangement	Nil: Without auxiliary contact B:1 Form B						
Construction	Nil: flux proofed types						
Main contact material	T: AgSnO <sub>2</sub>						
Insulation class	F: Class F						
Special code	XXX: Customer special requirement    Nil: Standard    991: Auxiliary contact gold plated						

Notes: 1) Flux-proofed relays can not be used in the environment with pollutants like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.


2) Water clearing or surface process is not suggested after the flux-proofed relays are assembled on PCB.

3) The customer special requirement express as special code after evaluating by Hongfa.


## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


### Outline Dimensions

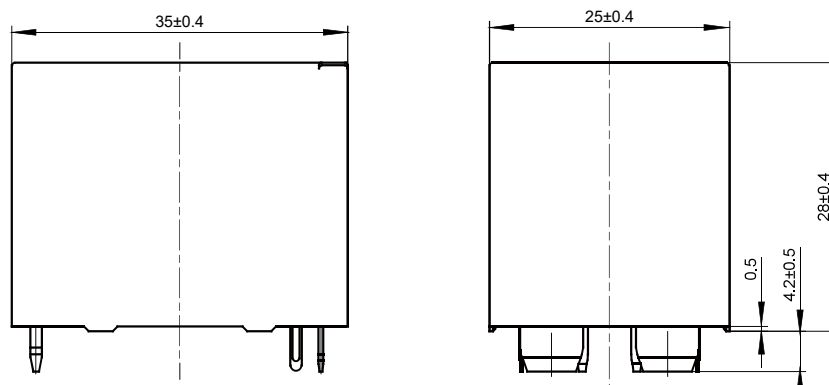

Wiring Diagram(Bottom view)



PCB Layout(Bottom view)

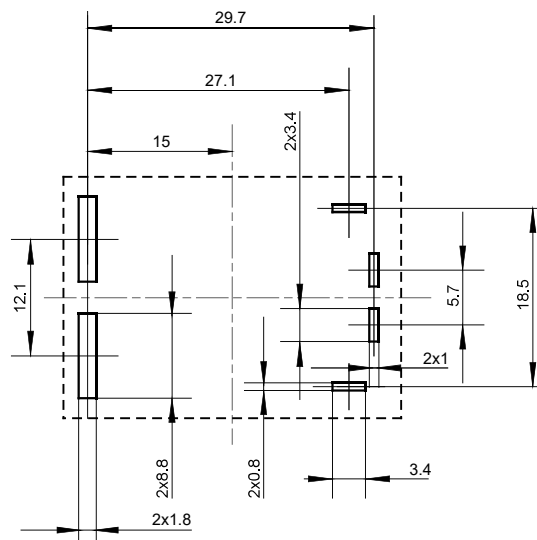

Notes:1) The pin dimension of the product outline drawing is the size before tinning (it will become larger after tinning), and the mounting hole size is the recommended design size of the PCB board hole. The specific PCB board hole design size can be mapped and adjusted according to the actual product.

2) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$  and  $\leq 30\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ ; outline dimension  $> 30\text{mm}$ , tolerance should be  $\pm 0.6\text{mm}$ .

3) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .

## Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.