

Specifications



Contactor, UEC3-09C, 3P (3NO), AC Coil

Main

Product Series	UEC3					
Product or Component Type	Contactor					
Device Short Name	UEC3-09C					
Contactor Application	Motor control Resistive load					
Utilisation Category	AC-3 AC-4 AC-1					
Poles Description	3P					
[Ue] Rated Operational Voltage	Power circuit: ≤ 690 V AC 50/60Hz					
[Ie] Rated Operational Current	9 A (at ≤ 60 °C) at ≤ 400 V AC AC-3 for power circuit 7.5 A (at ≤ 60 °C) at ≤ 400 V AC AC-4 for power circuit 20 A (at ≤ 60 °C) at ≤ 690 V AC AC-1 for power circuit					
[Us] Control Circuit Voltage (AC 50/60Hz)	Voltage (V):	24	36	48	110	220...230 380
	Code:	B7	CC7	E7	F7	M7 Q7

Complementary

Motor Power kW	2.2 kW at 220/230 V AC 50/60 Hz (AC-3) 4 kW at 380/400 V AC 50/60 Hz (AC-3) 5.5 kW at 660/690 V AC 50/60 Hz (AC-3)
Motor Power hp	1.5 hp at 110...120 V AC 50/60 Hz for 1 phase motors 1 hp at 200...208 V AC 50/60 Hz for 1 phase motors 1 hp at 220...240 V AC 50/60 Hz for 1 phase motors 2 hp at 200...208 V AC 50/60 Hz for 3 phases motors 3 hp at 220...240 V AC 50/60 Hz for 3 phases motors 5 hp at 440...480 V AC 50/60 Hz for 3 phases motors 7.5 hp at 550...600 V AC 50/60 Hz for 3 phases motors
Pole Contact Composition	3 NO

[Ith] Conventional Free Air Thermal Current	20 A (at $\leq 60^{\circ}\text{C}$) for power circuit 10 A (at $\leq 60^{\circ}\text{C}$) for signalling circuit
[Icw] Rated Short-time Withstand Current	105 A $\leq 40^{\circ}\text{C}$ - 10 s for power circuit 61 A $\leq 40^{\circ}\text{C}$ - 1 min for power circuit 30 A $\leq 40^{\circ}\text{C}$ - 10 min for power circuit
Associated Fuse Rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 32 A gG at $\leq 690\text{ V}$ coordination type 2 for power circuit
Average Impedance	2.7 m Ω - Ith 50 Hz for power circuit
[Ui] Rated Insulation Voltage	Power circuit: 690 V conforming to IEC 60947-4-1 Power circuit: 600 V UL Certified Signalling circuit: 690 V conforming to IEC 60947-5-1 Signalling circuit: 600 V UL Certified
Overvoltage Category	III
Pollution Degree	3
[Uimp] Rated Impulse Withstand Voltage	6 kV conforming to IEC 60947
Mechanical Durability	10 M cycles
Electrical Durability	1.0 M cycles 9 A AC-3 at $U_e \leq 400\text{ V}$
Control Circuit Type	AC at 50/60 Hz standard
Coil Technology	Without built-in suppressor module
Control Circuit Voltage Limits	0.85...1.1 U_s ($-40\ldots 60^{\circ}\text{C}$): operational AC 50/60 Hz 0.2...0.75 U_s ($-40\ldots 60^{\circ}\text{C}$): drop-out AC 50/60 Hz
Inrush Power in VA	70 VA 50/60 Hz (at 25°C)
Hold-in Power Consumption in VA	9 VA 50/60 Hz (at 25°C)
Operating Time	Power circuit: 12...22 ms closing, 4...22 ms opening Signalling circuit (NO): 15...26 ms closing, 4...22 ms opening Signalling circuit (NC): 4...19 ms opening, 12...32 ms closing
Maximum Operating Rate	Electrical: 1200 cycs/h Mechanical: 3600 cycs/h
Connections - Terminals	Power circuit: screw clamp terminals 1 1...4 mm ² (AWG 18...12)- cable stiffness: flexible without cable end Power circuit: screw clamp terminals 2 1...4 mm ² (AWG 18...12) - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 1 1...4 mm ² (AWG 18...12) - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 2 1...2.5 mm ² (AWG 18...14)- cable stiffness: flexible with cable end Power circuit: screw clamp terminals 1 1...4 mm ² (AWG 18...12)- cable stiffness: solid without cable end Power circuit: screw clamp terminals 2 1...4 mm ² (AWG 18...12) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 1 1...4 mm ² (AWG 18...12)- cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 1...4 mm ² (AWG 18...12)- cable stiffness: flexible without cable end

Control circuit: screw clamp terminals 1 1...4 mm² (AWG 18...12) - cable
stiffness: flexible with cable end

Control circuit: screw clamp terminals 2 1...2.5 mm² (AWG 18...14)- cable
stiffness: flexible with cable end

Control circuit: screw clamp terminals 1 1...4 mm² (AWG 18...12) - cable
stiffness: solid without cable end

Control circuit: screw clamp terminals 2 1...4 mm² (AWG 18...12) - cable
stiffness: solid without cable end

Control circuit, Power circuit: M3.5, Terminal width ≤ 8.1 mm (0.318 in)

Tightening Torque	Power circuit: 10.7 lb.in (1.2 N·m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 10.7 lb.in (1.2 N·m) - on screw clamp terminals - with screwdriver Philips No 2 Control circuit: 10.7 lb.in (1.2 N·m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 10.7 lb.in (1.2 N·m) - on screw clamp terminals - with screwdriver Philips No 2
Auxiliary Contact Composition	1NO, 1NC
Minimum Switching Voltage	24 V for signalling circuit
Minimum Switching Current	0.1A for signalling circuit
Insulation Resistance	> 10 MΩ for signalling circuit
Mounting Support	Screw 35mm DIN Rail

Environment

Standards	GB/T 14048.4, GB/T 14048.5, IEC/EN 60947-4-1, IEC/EN 60947-5-1, BS EN 60947-4-1, BS EN 60947-5-1, UL 60947-4-1, UL 60947-5-1
Product Certifications	CCC, CE, UKCA, VDE, UL (cULus LISTED)
IP Degree of Protection	IP20 front face conforming to IEC 60529
Permissible Ambient Air Temperature Around the Device	-40...60 °C for normal operating 60...70 °C with derating (for operation in the range of Us...1.1Us) Storage: -60...80 °C
Operating Altitude	0...3000 m without derating
Fire Resistance	Current-carrying parts: 850 °C conforming to IEC 60695-2-11
Height	74 mm
Width	45 mm
Depth	80 mm
Net Weight	0.31 kg

Packing Units

Unit Type of Package 1	1 box
Number of Units in Package 1	1 pcs
Package 1 Height	8.3 cm

Package 1 Width	4.8 cm
Package 1 Length	7.8 cm
Package 1 Weight	0.36 kg
Unit type of Package 2	1 carton
Number of Units in Package 2	50 pcs
Package 2 Height	19.5 cm
Package 2 Width	26.0 cm
Package 2 Length	41.0 cm
Package 2 Weight	17.3 kg

Offer Sustainability

REACH Regulation	Conforming
EU RoHS Directive	Conforming
Mercury Free	Yes
China RoHS Regulation	Conforming
RoHS Exemption Information	Yes


Contractual Warranty

Warranty	18 months
----------	-----------


Dimensions

UEC3-06...25 (3P, AC coil)

AC contactor:


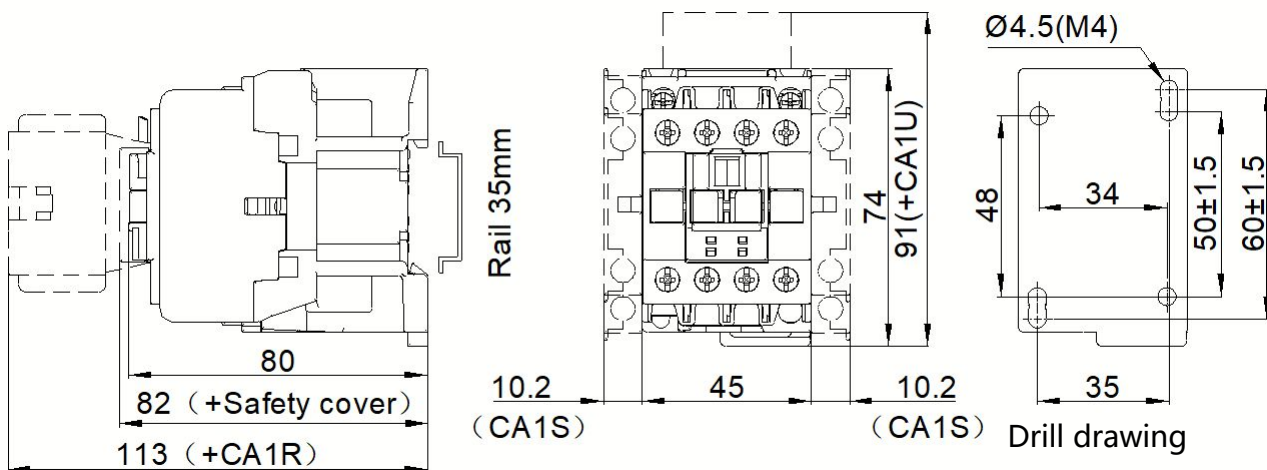


Interlock contactor:

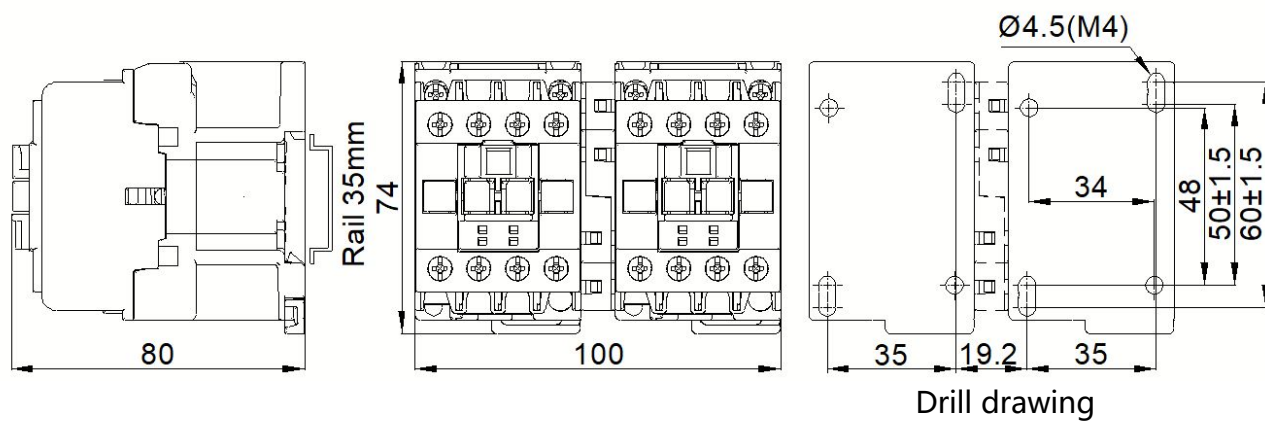

Note: The unit is mm. The tolerance for mounting holes: ± 0.5 ; for other external dimensions: ± 1.5 , unless otherwise specified.

Wiring diagram

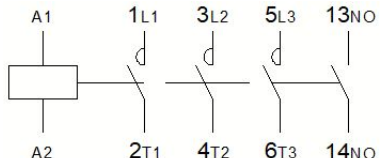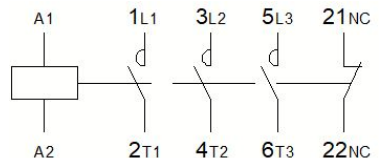AC contactor	
3P+1NO	3P+1NC
	

Top mounting auxiliary contact block (instantaneous auxiliary contact)		
CA1R11 (1NO1NC)	CA1R20 (2NO)	CA1R02 (2NC)
CA1R22 (2NO2NC)	CA1R31 (3NO1NC)	CA1R13 (1NO3NC)
CA1R40 (4NO)	CA1R04 (4NC)	
Side mounting auxiliary contact block (instantaneous auxiliary contact)		
CA1S11 (1NO1NC)	CA1S20 (2NO)	CA1S02 (2NC)