


Miniature Circuit Breaker

UEB6-125 Series

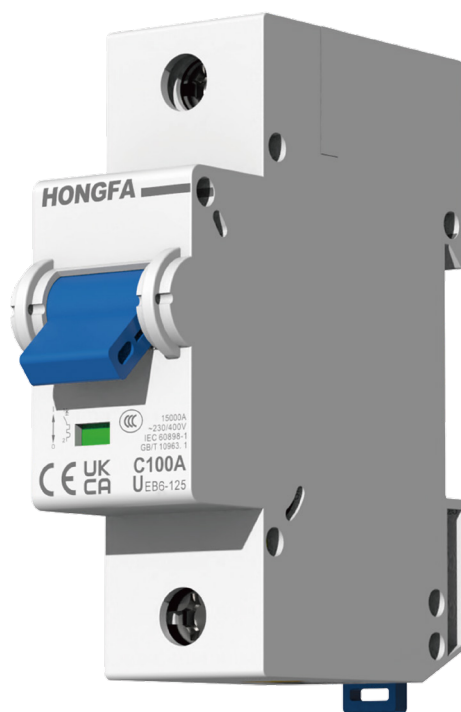

INTRODUCTION

Hongfa, (Shanghai Stock Exchange: 600885), founded in 1984, has been adhering to the enterprise spirit of “persevere for progress, strive for excellence”, and has built a complete industry system with complete categories and supporting facilities. At present, Hongfa has more than 30 subsidiaries and has established three districts of R & D and production bases. Its products cover various categories, such as medium and low voltage products, relays, high and low voltage switchgear, capacitors, precision parts and automation equipment.

Xiamen Hongfa Electrical Safety & Controls Co., Ltd. is a wholly-owned subsidiary of Hongfa, which specializes in R & D, design and manufacture medium and low voltage products. Its distribution apparatus, terminal apparatus, control apparatus and other products are widely used in real estate, electric power, new energy, industry, HVAC, transportation, information and other fields.

In the United States, Europe, Southeast Asia and other regions, Hongfa has established localized marketing and service networks with global market operation and technical service. Relying on professional and rigorous technical support, fast response and all-round service, safe and reliable product quality and high cost performance, Hongfa has reached business cooperation relationship with many global top 500 enterprises and other well-known enterprises, such as Enel, GE, Honeywell, Carrier, Trane, Johnson Controls, Danfoss, State Grid, China Southern Power Grid, CRRC, China Mobile, China Unicom, etc.




Sunban Industrial Park



Donglin Industrial Park



Haicang Industrial Park

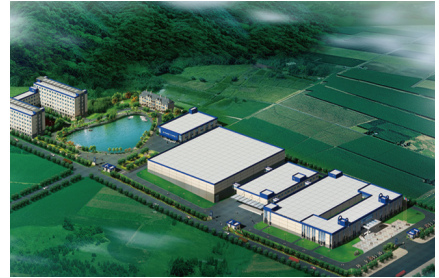

Zhongjiang Industrial Park



Zhangzhou Industrial Park



Zhoushan Industrial Park



Xi'an Factory

In terms of technology R & D and manufacturing, taking the national enterprise technology center as the platform, Hongfa has set up postdoctoral research workstation, academician and expert workstation. Now it has developed into a leading scientific research and production base in the industry. From product development, mold manufacturing, parts manufacturing, automated product assembly and online testing, Hongfa has successfully built an integrated whole industry chain of medium and low voltage products. In terms of product testing, Hongfa testing center has passed the certification of VDE, UL, CNAS and other international organizations, and has complete testing and analysis equipment for low-voltage products, such as 50kA ultimate short circuit test, 8kA electrical life test, 80kA characteristic test, mechanical simulation and testing system, electro-magnetic simulation and testing system.

Hongfa always adheres to the policy of "focused on the market, winning through quality", and has a completed quality assurance system. Its products have passed UL / CUL, VDE, CQC, CCC and other international safety certification. In the process of quality management, Hongfa actively implements the advanced quality concept, constantly improves the quality management system, continuously promotes the product process quality control and testing, strengthens the supply chain management, and is committed to providing each customer with high-quality products and creating greater value.

Advanced technology and strict quality control have created Hongfa's brand strength. Hongfa is willing to work hand in hand with global customers to share the convenience and well-being brought by science and technology.

CONTENT

UEB6-125 Series Miniature Circuit Breaker

01	Product Overview	05
02	Standard Operation and Installation Conditions	06
03	Ordering Information	06
04	Main Technical Parameter	07
05	Characteristic Curve	08
06	Derating Coefficient	09
07	Wiring Capability	09
08	Dimensions	10

Production Overview

Scope of Application

UEB6-125 series miniature circuit breakers are mainly used in the circuit with AC 50Hz/60Hz, rated operational voltage of 230V/400V, and rated operational current up to 125A, with overload protection and short circuit protection.

Product Features

Provide safe use and protection

- Red and green indicating window to indicate the opening and closing status of the contact
- Level 2 electric shock protection for safer operation

Provide reliability

- Can accept wiring torques higher than national standards, making connections more reliable


Convenient installation

- Dual stable snap-on design for easy installation and disassembly
- Modular structures for free combination




High quality electrical performance

- High breaking capacity and long electrical endurance
- Short circuit breaking capacity of 15kA

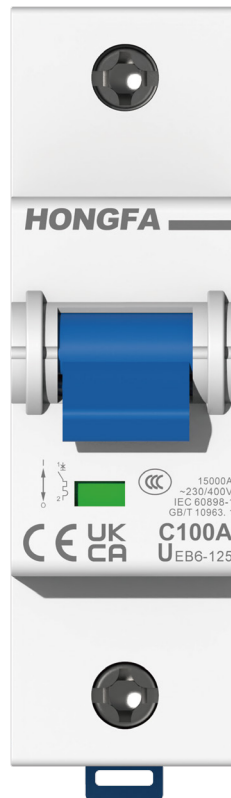Product Appearance



Standard

	CCC	GB/T 10963.1
	CE	EN60898-1
	UKCA	BS EN60898-1

Standard Operation And Installation Conditions

- Operating temperature range: -35 °C...+70 °C
- Storage temperature range: -40 °C...+85 °C
- Altitude: < 2000m
- Pollution degree: 2
- Mounting category: II/III
- Mounting condition: Install on 35mm DIN rail, the inclination between the mounting plane and the vertical plane shall be not exceed $\pm 5^\circ$

Ordering Information


	UE	B	6	- 125	/C	125	3
Enterprise code: HESC							
Product code: MCB Miniature Circuit Breaker							
Design SN: 6							
Maximum rated current: 125: 125A							
Instantaneous tripping characteristics: B: 3 In ... 5 In; C: 5 In ... 10 In; D: 10 In ... 20 In.							
Rated current: 63A, 80A, 100A, 125A							
Number of poles: 1: 1P; 2: 2P; 3: 3P; 4: 4P							

Main Technical Parameter

Type		UEB6-125
Electrical Characteristics		
Number of poles		1P, 2P, 3P, 4P
Instantaneous tripping characteristics		B: 3In to 5In; C: 5In to 10In; D: 10In to 20In
Breaking capacity	kA	Icn=15, Ics=7.5
Rated current In	A	63, 80, 100, 125 (125A B/C only)
Rated voltage Ue	V/AC	230/400 (1P); 400 (2P/3P/4P)
Rated insulation withstand voltage Ui	V	500
Rated impulse withstand voltage Uimp	kV	4
Mechanical Characteristics		
Mechanical endurance	cycles	10000
Electrical endurance	cycles	63A/80A:10000 100A:5000 125A:4000
Protection degree		IP20
Contact position indication		OFF = Green ON = Red
Reference ambient temperature	°C	30
Other Characteristics		
Weight (g)	1P	220
	2P	445
	3P	670
	4P	895

Characteristic Curve

Tripping characteristics B, C, D

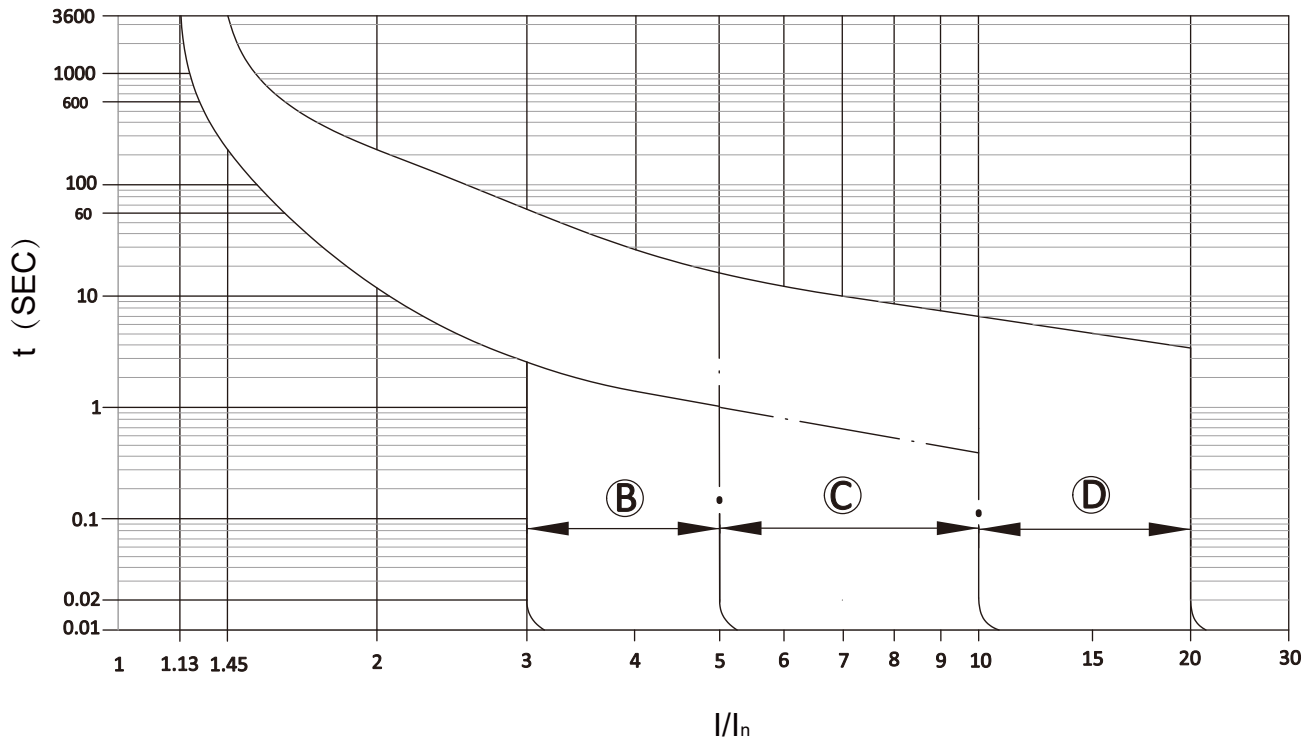

Derating Coefficient

Temperature Compensation

In (A)	Ambient temperature T (°C)											
	-35	-30	-20	-10	0	10	20	30	40	50	60	70
63	82.53	81.27	78.75	75.6	72.45	69.93	66.15	63	59.22	55.44	51.66	47.25
80	104.8	103.2	100	96	92	88.8	84	80	75.2	70.4	65.6	60
100	131	129	125	120	115	111	105	100	94	88	82	75
125	163.7	161.2	156.2	150	143.7	138.7	131.2	125	117.5	110	102.5	93.7

Derating Coefficient In High Altitude Area

Altitude (m)	2000	3000	4000
Rated voltage Ue (V)	400	400	400
Rated current In (A)	In	0.96*In	0.93*In


Wiring Capability

Press wiring, connection to 2.5mm²...50mm² wire.

Terminal screw specification	Rated torque	EN/IEC standard torque	Solid/Rigid wire	Flexible/Stranded copper wire
M6	2.5N·m	2.5N·m	2.5mm ² ...50mm ²	2.5mm ² ...50mm ²

Dimensions

Unit: mm

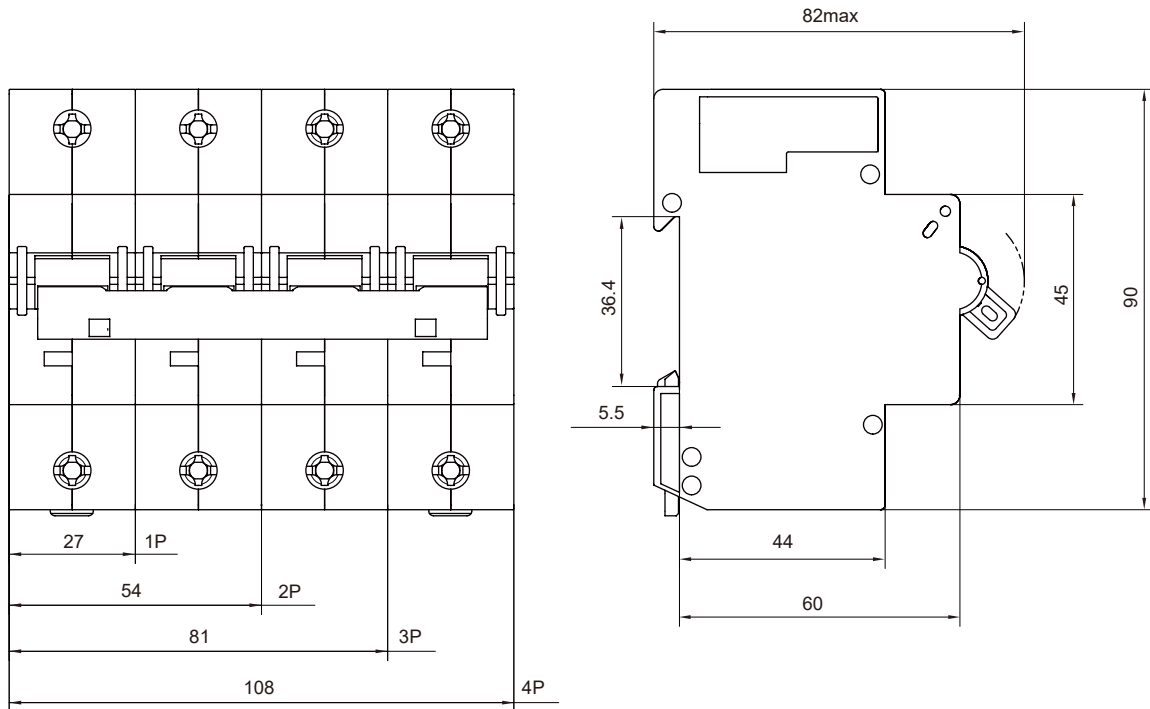

Note: Unmarked tolerance is ± 1

Xiamen Hongfa Electroacoustic Co. Ltd

Add: No.560-578, Donglin Rd., Jimei North Ind. Dist., Xiamen, China

TEL: +86-592-6106688

FAX: +86-592-6106678

E-mail: marketing@hongfa.com

Marketing & Sales Network

Hongfa Europe GmbH

ADD: Marie-Curie-Ring 26, D-63477
Maintal, Germany

TEL: +49-6181-4306-0

E-mail: info@hongfa-europe.com

Hongfa America, Inc.

ADD: 20381 Hermana Circle, Lake
Forest, CA92630, USA

TEL: +1-714-669-2888

E-mail: sales@hongfaamerica.com

KG Technologies, Inc.

ADD: 6028 Stat Farm Drive
Rohnert Park, CA 94928, USA

TEL: +1.888.513.1874

E-mail: info@kgtechnologies.com

Hongfa Italy Srl

ADD: C/O Regus Business Center
Via Paracleso, 26 Agrate

B.za (MB), Italy

TEL: +39-0362-890-1544

E-mail: info@hongfa-europe.com

Hongfa Electroacoustic (Hongkong) Co., Ltd.

ADD: Rm 1810-12, 18/F., Shatin Galleria,
18-24 Shan Mei St., Fotan, N.T, HongKong

TEL: +852-2947-7889

E-mail: hongkong@hongfa.com

Shanghai Hongfa Electroacoustic Co., Ltd.

ADD: NO.51.341, Jiuxin Rd., Jiuting
Town, Songjiang Dist., Shanghai

TEL: +86-21-37693111

E-mail: shanghai@hongfa.com

Beijing Hongfa Electroacoustic Relay Co., Ltd.

ADD: 111Bldg, Phase IV Westside of Lian
-dong U Valley, Tongzhou Dist., Beijing

TEL: +86-10-56495556

E-mail: beijing@hongfa.com

Sichuan Hongfa Relay Co., Ltd.

ADD: 12F, Hongfa Building, No.6 Wuxing 4th
Road, Wuhou District, Chengdu

TEL: +86-28-86627550

E-mail: sichuan@hongfa.com

Hongfa India Branch

TEL: +91-9810415895

E-mail: amitkhuda@hongfa.com

TEL: +91-9971187792

E-mail: rohit@hongfa.com

Hongfa Korea Branch

ADD: RM302, Samwoo B/D, 286-4
Gaebong dong, Guro-gu,
Seoul, Korea

TEL: +82-10-5355-4899/+82-10-8704-4706

E-mail: korea@hongfa.com /
khlee@hongfa.com

Hongfa Brazil Branch

Non-automotive relay project

TEL: +86-0592-6196714

E-mail: southamerica@hongfa.com

Automotive relay project

TEL: +55-11-949697906

E-mail: mauro-loyola@hongfa.com

Hongfa Philippine Branch

TEL: +639177189352 / +639175780846

E-mail: nia-videna@hongfa.com

Hongfa Turkey Branch

TEL: +90-535-0221881

E-mail: info-turkey@hongfa.com

The relevant information on the products contained is for reference only.
For details, please consult our business staff.

Headquarter's Marketing & Sales Center
ADD: No.566-578, Donglin Rd., Jimei North Ind. Dist., Xiamen
E-mail: marketing@hongfa.com

SALES SERVICE HOTLINE
400-600-1502



HONGFA GROUP



HONGFA ELECTRIC