

Product datasheet





Specifications




DP Contactor, XMC0-401 , 1P+SHUNT(1NO), AC Coil


Main

Product Series	XMC0		
Product or Component Type	Definite Purpose Contactors		
Device Short Name	XMC0-401		
Contactor Application	HVAC, refrigeration, heating, data processing, welding, elevators, hoist & cranes, pool, commercial spa, and food service equipment industries, etc.		
Poles Description	1P+SHUNT		
Rated Operational Voltage [Ue]	Power circuit: ≤ 600 V AC 50/60Hz		
Full Load Ampere [FLA]	40 A		
Locked Rotor Ampere [LRA]	240 A @ 240/277 V AC; 200 A @ 480 V AC; 160 A @ 600 V AC		
Resistive Ampere [RES]	50 A		
Control Circuit Voltage [Us]	Code	Voltage	
	E	24 V AC 50/60Hz	
	F	110-120 V AC 50/60Hz	
	I	208-220 V AC 50Hz	208-240 V AC 60Hz
	L	277 V AC 60Hz	
	N	380-415 V AC 50Hz	440-480 V AC 60Hz
Main Contact Terminals	C type: Slotted & Hex head washer w/ quick connect		
	D type: Box Lug w/ quick connect		
	E type: Box lug w/ quick connect (Line side)		
	Slotted & Hex head washer w/ quick connect (Load side)		
	F type: Slotted & Hex head washer w/ quick connect (Line side)		
	Box lug w/ quick connect (Load side)		
			
	C type on 25-40A FLA #10-32 combination phillips, slotted & 5/16 hex head with #8 washer	D type on 25-40A FLA #14-4 AWG Cu/Al	

Coil Terminals



Normal type terminal



Vertical type terminal

Complementary

Maximum Horse Power Rating	3 hp 240/277 V AC, 1phase
Pole Contact Composition	1 NO
Pollution Degree	3
Control Circuit Voltage Limits	0.8...1.1 Us: operational AC 50/60 Hz
@ 25°C (Cold state)	0.2...0.75 Us: drop-out AC 50/60 Hz
Nominal Inrushed VA	E: 27 VA @ 24V 50 Hz, 25 VA @ 24V 60Hz
@ 25°C (Cold state)	F: 27 VA @ 120V 50 Hz, 25 VA @ 120V 60Hz
	I: 25 VA @ 220V 50 Hz, 27 VA @ 240V 60Hz
	L: 25 VA @ 277V 60Hz
	N: 27 VA @ 415V 50 Hz, 35 VA @ 480V 60Hz
Nominal Sealed VA	E: 8.5 VA @ 24V 50 Hz, 6.5 VA @ 24V 60Hz
@ 25°C (Cold state)	F: 9 VA @ 120V 50 Hz, 7 VA @ 120V 60Hz
	I: 8.5 VA @ 220V 50 Hz, 8.5 VA @ 240V 60Hz
	L: 8.5 VA @ 277V 60Hz
	N: 11 VA @ 415V 50 Hz, 12 VA @ 480V 60Hz
Maximum Operating Rate	Electrical: 360 cycs/h
	Mechanical: 3600 cycs/h
Tightening Torque	Power circuit: 25 lb-in - on screw terminals
	Power circuit: 25 lb-in - on box lug terminals
Auxiliary Contact Composition	N/A
Mounting Support	Screw
	35mm DIN Rail (should be added a DIN rail adapter, suffix "-123" after model name)
A2L Application	Suffix w/ "W" : Flame Arrest-protected Components for Use in Refrigeration and Air-conditioning Equipment Employing A2L Refrigerants.
Minimum Switching Load	110 V AC, 1A

Environment

Standards	UL 60947-4-1, GB/T 14048.4, IEC 60947-4-1, EN 60947-4-1
Product Certifications	UL, CCC, TÜV
Permissible Ambient Air	-40 °C...70 °C (-40 °F...158 °F) for normal operating
Temperature Around the Device	-40 °C...70 °C (-40 °F...158 °F) for storage
Height	81 mm
Width	52 mm
Depth	59 mm
Net Weight	0.22 kg

Packing Units

Unit Type of Package (bulk package)	1 carton
Number of Units in Package	50 pcs
Package Height	17.5 cm
Package Width	31 cm
Package Length	46 cm
Package Weight	11.9 kg

Offer Sustainability

REACH Regulation	Conforming
EU RoHS Directive	Conforming
Mercury Free	Yes
China RoHS Regulation	Conforming
RoHS Exemption Information	Yes


Contractual Warranty

Warranty	18 months
----------	-----------


Dimensions

XMC0 1P+SHUNT (1NO)

AC Contactor:

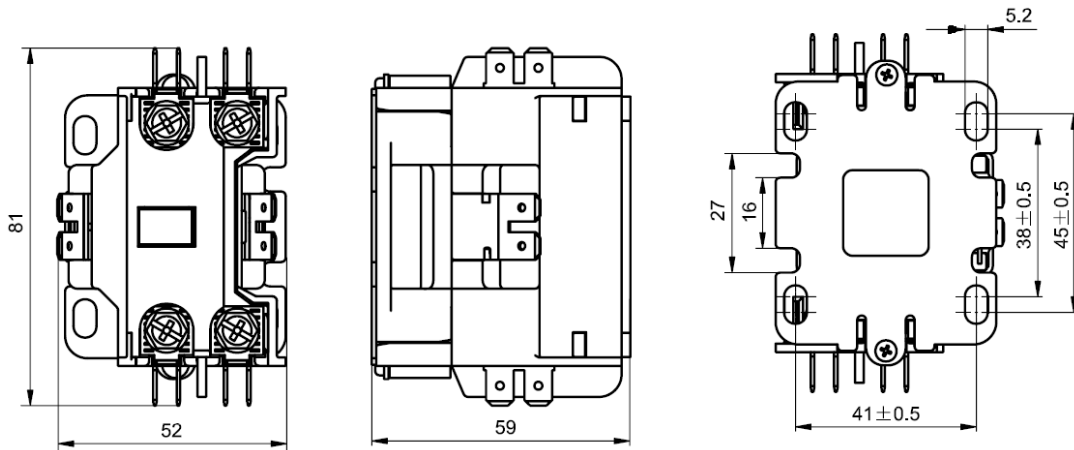

Rail mounting contactor:

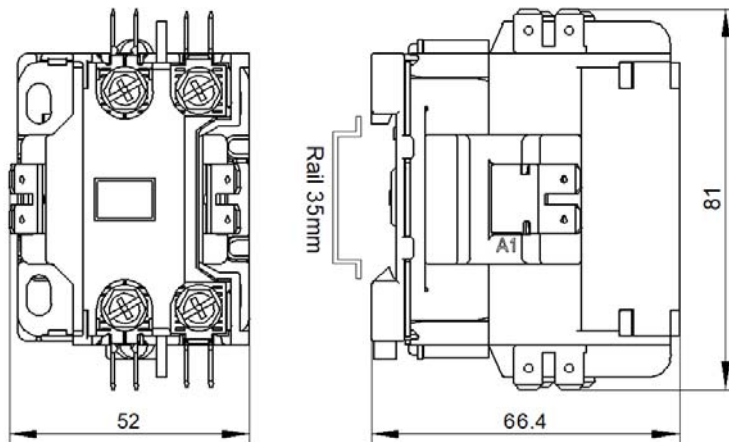

Note: The unit is mm. The tolerance for mounting holes: ± 0.5 ; for other external dimensions: ± 1.5 , unless otherwise specified.

Wiring Diagram

