

Specifications



Auxiliary Contact Blocks

Main

Range	C03A				
Product or Component Type	Auxiliary Contact Blocks				
Range Compatibility	XMC0 3P 25A...90A				
	XMC0 4P 25A...40A				
Pole Contact Composition	1NO+1NC, 2NO, 2NC, 1NO, 1NC				
Ratings					
	Rated voltage (VAC)	120	240	480	600
	Breaking current (A)	3.0	1.5	0.75	0.6
	Making current (A)	30	15	7.5	6
	Conventional free air thermal current	10	10	10	10
Product Certifications	UL				

Complementary

Quick Connect Terminals	0.250" quick connect terminal or pressure plate screw
Minimum Switching Load	24V, 0.1A

Environment

Ambient Air Temperature	-40 °C...+70 °C (-40 °F...+158 °F) for normal operating
	-40 °C...+70 °C (-40 °F...+158 °F) for storage
Height	71.5mm
Width	11mm
Depth	66.8mm
Net Weight	0.045kg

Packing Units

Unit Type of Package	1box	1 carton
Number of Units in Package	1pcs	50pcs
Package Height	68mm	110mm
Package Width	19mm	220mm
Package Length	75mm	410mm
Package Weight	0.055kg	2.15kg

Offer Sustainability


REACH Regulation	Conforming
EU RoHS Directive	Conforming
Mercury Free	Yes
China RoHS Regulation	Conforming
RoHS Exemption Information	Yes

Contractual Warranty

Warranty	18 months
----------	-----------


Dimensions

C03A

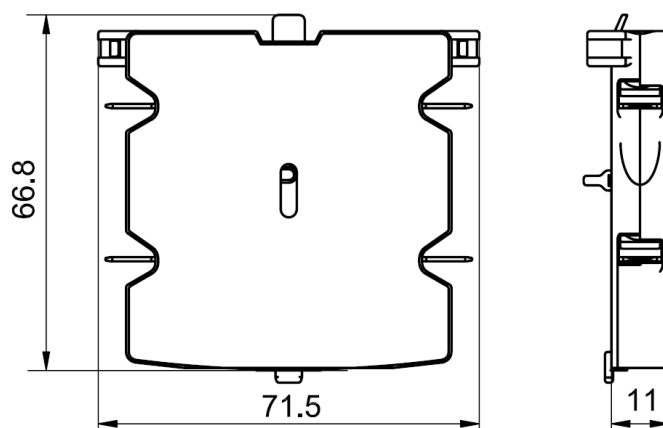


Note: The unit is mm. The tolerance for mounting holes: ± 0.5 ; for other external dimensions: ± 1.5 , unless otherwise specified.


Wiring Diagram




1NC




1NO



1NC + 1NO

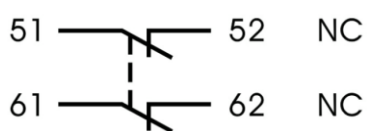

2NC

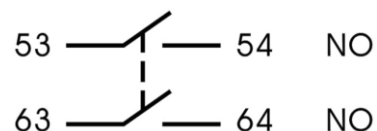

2NO