

Specifications



Microswitch Blocks

Main

Range	C03M
Product or Component Type	Microswitch Blocks
Range Compatibility	XMC0 3P 25A...90A XMC0 4P 25A...40A
Pole Contact Composition	1 SPDT 2 SPDT
Ratings	16A, 125 or 250 VAC 1/3hp, 125 VAC 10A, 30 VDC
Product Certifications	UL

Environment

Ambient Air Temperature	-40 °C...+70 °C (-40 °F...+158 °F) for normal operating -40 °C...+70 °C (-40 °F...+158 °F) for storage
Height	73 mm
Width	17.8 mm
Depth	66.8 mm
Net Weight	0.031 kg

Packing Units

Unit Type of Package (bulk package)	1box	1 carton
Number of Units in Package	1pcs	40pcs
Package Height	68mm	110mm

Package Width	22mm	220mm
Package Length	75mm	410mm
Package Weight	0.043kg	1.73kg

Offer Sustainability


REACH Regulation	Conforming
EU RoHS Directive	Conforming
Mercury Free	Yes
China RoHS Regulation	Conforming
RoHS Exemption Information	Yes

Contractual Warranty

Warranty	18 months
----------	-----------

Dimensions

C03M

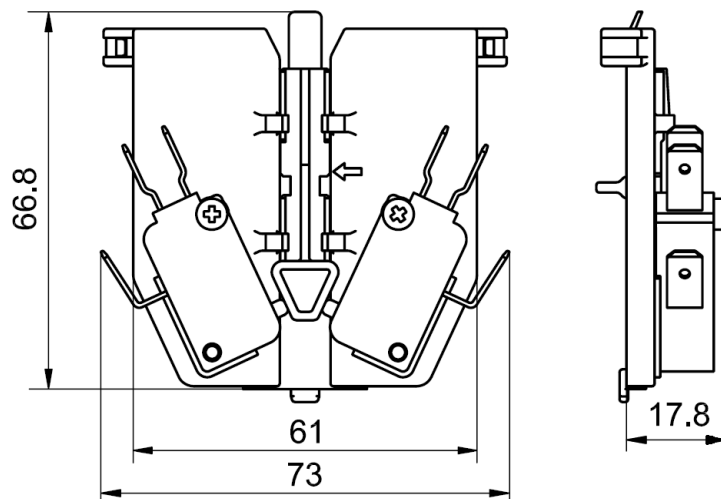

Note: The unit is mm. The tolerance for mounting holes: ± 0.5 ; for other external dimensions: ± 1.5 , unless otherwise specified.