

# HF115FK

# MINIATURE HIGH POWER RELAY




File No.:E134517



File No.:116934



File No.:CQC17002176308



## Features

- Low height: 15.7 mm
- 16A switching capability
- 5kV dielectric strength (between coil and contacts)
- Creepage distance: 10mm
- Meeting reinforce insulation
- Flux proofed type
- Product in accordance to IEC 60335-1 available
- UL insulation system: Class F
- Through-Hole Reflow Version available

**RoHS compliant**

## CONTACT DATA

Contact arrangement	1A, 1C	2A, 2C
Contact resistance <sup>1)</sup>	100mΩ max.(at 1A 6VDC)	
Contact material	AgSnO <sub>2</sub>	
Contact rating (Res. load)	10A/12A/16A 250VAC	8A 250VAC
Max. switching voltage	400VAC	
Max. switching current	10A / 12A / 16A	10A
Max. switching power	2500VA/3000VA/4000VA	2000VA
Mechanical endurance	1 x 10 <sup>7</sup> OPS	
Electrical endurance	H3(P)T type: 1 x 10 <sup>5</sup> OPS (NO: 16A 277VAC, Resistive Load at 40°C, 1s on 9s off)	
	Z1PT(875) type: 1 x 10 <sup>5</sup> OPS (NO:10A 250VAC, Resistive Load at 40°C, 1s on 9s off)	
	Z3(P)T type: 5 x 10 <sup>4</sup> OPS (NO: 16A 250VAC, Resistive Load at 85°C, 1s on 9s off)	
	2Z4(P)T type: 5 x 10 <sup>4</sup> OPS (NO: 8A 250VAC, Resistive Load at 85°C, 1s on 9s off)	
	Z33 type: 1 x 10 <sup>5</sup> OPS (NO: 16A 277VAC, Resistive Load at 40°C, 1s on 9s off)	
	2Z43 type: 5 x 10 <sup>4</sup> OPS (NO: 8A 277VAC, Resistive Load at 40°C, 1s on 9s off)	

Notes: 1) The data shown above are initial values.

## CHARACTERISTICS

Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
	Between contact sets	2500VAC 1min
Surge voltage (between coil & contacts)		10kV (1.2 x 50μs)
Operate time (at rated. volt.)		10ms max.
Release time (at rated. volt.)		5ms max.
Shock resistance *	Functiona	98m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance *		10Hz to 150Hz 10g/5g
Humidity		5% to 85% RH
Ambient temperature		-40°C to 85°C
Termination		PCB
Unit weight		Approx. 13g
Construction		Flux proofed

Notes: 1) The data shown above are initial values.  
2) \* Index is not in relay length direction.

## COIL

Coil power	Approx. 400mW(Standard type)
	Approx. 530mW(high power consumption type)

## COIL DATA

at 23°C

Standard type				
Nominal Voltage VDC	Pick-up Voltage VDC max. <sup>1)</sup>	Drop-out Voltage VDC min. <sup>1)</sup>	Max. Voltage VDC * <sup>2)</sup>	Coil Resistance Ω
5	3.50	0.5	7.5	62 x (1±10%)
6	4.20	0.6	9.0	90 x (1±10%)
9	6.30	0.9	13.5	202 x (1±10%)
12	8.40	1.2	18	360 x (1±10%)
18	12.60	1.8	27	810 x (1±10%)
24	16.80	2.4	36	1440 x (1±10%)
48	33.60	4.8	72	5760 x (1±15%)

## High power consumption type

Nominal Voltage VDC	Pick-up Voltage VDC max. <sup>1)</sup>	Drop-out Voltage VDC min. <sup>1)</sup>	Max. Voltage VDC * <sup>2)</sup>	Coil Resistance Ω
5	3.50	0.5	7.5	47 x (1±10%)
6	4.20	0.6	9.0	68 x (1±10%)
9	6.30	0.9	13.5	153 x (1±10%)
12	8.40	1.2	18	271 x (1±10%)
18	12.60	1.8	27	611 x (1±10%)
24	16.80	2.4	36	1086 x (1±10%)
48	33.60	4.8	72	4347 x (1±15%)

Notes: 1) The data shown above are initial values.

2)\*Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2024 Rev. 1.00

## SAFETY APPROVAL RATINGS

Standard type			High power consumption type	
UL/CUL	AgSnO <sub>2</sub>	Z1T: 12A 250VAC at 85°C Z2T: 12A 250VAC at 85°C Z3T: 16A 250VAC at 85°C Z24T: 8A 250VAC at 85°C	UL/CUL	Z1PT: 12A 277VAC 85°C 16A 277VAC room temperature TV8 NO room temperature Z2PT: 12A 277VAC 85°C 6A 277VAC room temperature TV8 NO room temperature Z3PT: 16A 277VAC 85°C TV8 NO room temperature Z24PT: 8A 250VAC 85°C
	AgNi	Z13: 12A 250VAC at 40°C Z23: 12A 250VAC at 40°C Z33: 16A 250VAC at 40°C Z243: 8A 250VAC at 40°C		
VDE	AgSnO <sub>2</sub>	Z1T: 12A 250VAC at 85°C Z2T: 12A 250VAC at 85°C Z3T: 16A 250VAC at 85°C Z24T: 8A 250VAC at 85°C	VDE	Z1PT: 12A 277VAC 85°C Z2PT: 12A 277VAC 85°C Z3PT: 16A 277VAC 85°C Z24PT: 8A 250VAC 85°C
	AgNi	Z13: 12A 250VAC at 85°C Z23: 12A 250VAC at 85°C Z33: 16A 250VAC at 85°C Z243: 8A 250VAC at 85°C		

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

## ORDERING INFORMATION

Type	HF115FK / 12 -H S 3 P T (XXX)						
Coil voltage	5, 6, 9, 12, 18, 24, 48 VDC						
Contact arrangement	H: 1 Form A Z: 1 Form C 2H: 2 Form A 2Z: 2 Form C						
Construction	S: Plastic sealed <sup>1)</sup> Nil: Flux proofed						
Version	1: 3.5mm 1 pole 12A 2: 5.0mm 1 pole 12A 3: 5.0mm 1 pole 16A 4: 5.0mm 2 pole 8A						
Coil type	P: high power consumption type Nil: Standard						
Contact material <sup>2) 3)</sup>	T: AgSnO <sub>2</sub> 3: AgNi (Standard)						
Special code <sup>4)</sup>	XXX: Customer special requirement Nil: Standard (875): 1 pole 10A(Only 1 version high power consumption type) (170): Meeting TV-8(Only 1 pole high power consumption type)						

Notes: 1) Only applicable to HF115FK 1 pole.

2) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.).

3) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.

4) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT). (253) means Through-Hole Reflow Version(valid for Flux proofed only).

5) Two packing methods available: plastic tray package, tube package, Standard tube packing length is 616mm. Any special requirement needed, please contact us for more details.

6) For the products that need to meet the explosion-proof requirements of "IEC 60079 series", please note [Ex] after the model and specification when placing the order for the plastic type specification, and note [Exd] after the model and specification when placing the order for the non-plastic type specification. Our company will print the "Ex" or "Exd" logo on the product shell to distinguish them. Because not all products of the specification have explosion-proof certification, please contact us if necessary to determine the appropriate product.



## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

### Outline Dimensions

3.5mm Pinning (HF115FK/ □□□ -1-□ )

5mm Pinning (HF115FK/ □□□ -□ -2/3/4-□ )

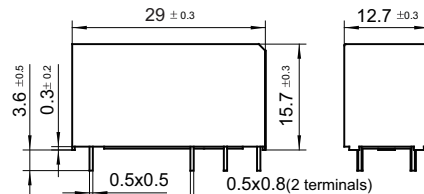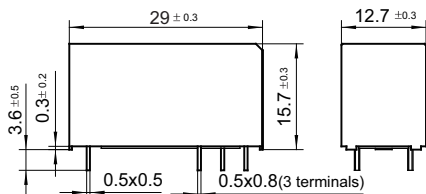

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

### Wiring Diagram (Bottom view)

3.5/5mm Pinning, 1 Pole, 12A/16A, HF115FK/ □□□ -1/2-□



1 Form A




1 Form C

5mm Pinning, 1 Pole, 16A, HF115FK/ □□□ -3-□




1 Form A




1 Form C

5mm Pinning, 2 Pole, 8A, HF115FK/ □□□ -2□ -4-□




2 Form A




2 Form C

### PCB Layout(Bottom view)

3.5mm Pinning, 1 Pole, 12A, HF115FK/ □□ -□ -□ -1-□□




1 Form A




1 Form C

5mm Pinning, 1 Pole, 12A, HF115FK/ □□ -□ -□ -2-□□




1 Form A




1 Form C

5mm Pinning, 1 Pole, 16A, HF115FK/ □□ -□ -□ -3-□□



1 Form A




1 Form C


## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

5mm Pinning, 2 Pole, 8A, HF115FK/ □□ -2□ -□ -4-□□



2 Form A




2 Form C


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .  
 2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .  
 3) The width of the gridding is 2.52mm.

## CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER

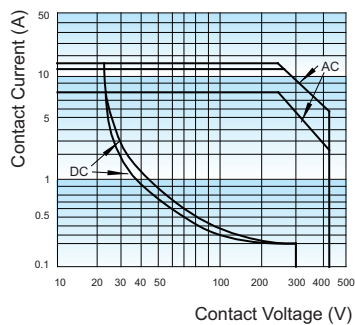


COIL OPERATING RANGE (DC) \*

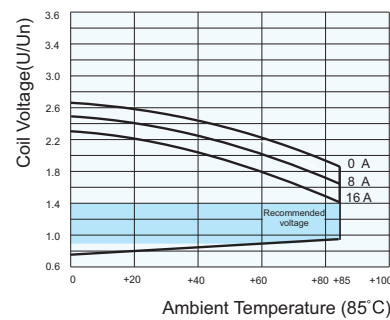


**Notes:** \* The use of a relay with an energising voltage other than the rated coil voltage may lead to reduced electrical life.  
 An energising voltage over the above range may damage the insulation of relay coil.

ENDURANCE CURVE

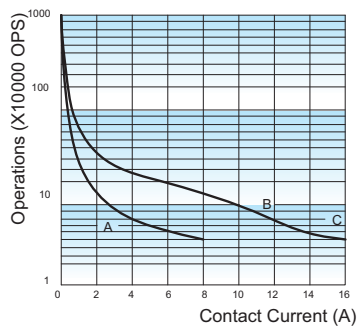

**Notes:**  
 1) Curve A: 2Z4T type  
 Curve B: Z2T type (or Z2T type)  
 Curve C: Z3T type  
 2) Test conditions:  
 NO, resistive load, 250VAC, flux proofed,  
 at 85°C, 1s on 9s off.

ENDURANCE CURVE

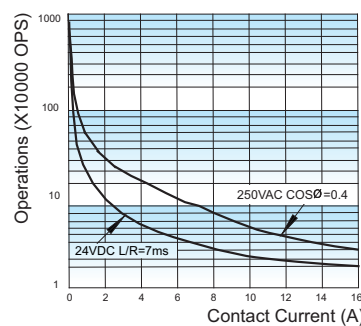

**Notes:**  
 1) Curve : H3T type  
 2) Test conditions:  
 NO, at 85°C, 1s on 9s off, flux proofed.

### Disclaimer

The specification is for reference only. See to 'Terminology and Guidelines' for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.