

HF11F

MINIATURE HIGH POWER RELAY



File No.: E133481



Features

- 30A/415VAC contact switching capability
- Multiple contact forms:
1 Form C, 2 Form C, 3 Form C, 1 Form Z,
1 Form A, 2 Form A, 3 Form A, 1 Form X,
1 Form B, 2 Form B, 3 Form B, 1 Form Y
- QC terminal
- Flange mounting available
- Impulse voltage up to 6kV(Between contact & coil)
- UL insulation system: Class F

RoHS compliant

CONTACT DATA

Contact arrangement ¹⁾	1C, 2C, 3C, QZ, 1A, 2A, 3A, QH 1B, 2B, 3B, QD
Contact resistance ²⁾	50mΩ max.(at 6VDC 100mA)
Contact material	AgSnO ₂
Contact gap	0.6mm min.
Contact rating (Res.load)	25A 415VAC, 15A 28VDC ³⁾ 30A 415VAC, 30A 28VDC ⁴⁾
Max. switching voltage	415VAC
Max. switching current	30A
Max. switching power	12450VA 840W
Min. Capacity ⁵⁾	5VDC 100mA
Mechanical endurance	1×10 ⁷ OPS
Electrical endurance	415VAC Resistive load: 5×10 ⁴ ops (55°C) 28VDC Resistive load: 10×10 ⁴ ops (55°C)

- Notes:** 1) 3Z, 3H, 3D is same polarity.
2) The data shown above are initial values.
3) Only for products with contact forms: 1Z, 2Z, 3Z, 1H, 2H, 3H, 1D, 2D, 3D.
4) Only for products with contact forms: QZ, QH, QD.
5) Min. contact load is reference value. Please perform the confirmation test with the actual load before usage since reference value may change according to switching frequencies, environmental conditions and expected life cycles.

COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC	Coil Resistance Ω
12	9.6	1.2	13.2	100×(1±10%)
24	19.2	2.4	26.4	400×(1±10%)
110	88	11	121	8400×(1±10%)
220	176	22	242	33600×(1±10%)

Nominal Voltage VAC	Pick-up Voltage VAC max.	Drop-out Voltage VAC min.	Max. Voltage VAC	Coil Resistance Ω
12	9.6	3.6	13.2	17.7×(1±15%)
24	19.2	7.2	26.4	72×(1±15%)
120	96	36	132	1700×(1±15%)
240	192	72	264	7200×(1±15%)

- Notes:** 1) The data shown above are initial values.
2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.



HONGFA RELAY

ISO9001,IATF16949,ISO14001,ISO45001,IECQ QC 080000,ISO/EC 27001 CERTIFIED

2026 Rev. 1.00

CHARACTERISTICS

Insulation resistance	1000MΩ(500VDC)	
Dielectric strength	Between coil & contacts	2200VAC 1min ³⁾ , 4400VAC 1min ⁴⁾
	Between open contacts	1600VAC 1min ³⁾ , 2000VAC 1min ⁴⁾
	Between contacts sets	2200VAC 1min ³⁾
Impulse voltage (Between contact & coil)	6kV(1.2/50μs)	
Operate time(at nomi. volt.)	20ms max.	
Release time(at nomi. volt.)	20ms max.	
Temperature rise	100K max.(at 55°C)	
Shock resistance	Functional	10g
	Destructive	100g
Vibration resistance	10Hz to 150Hz DA 1mm	
Humidity	5% to 85%RH	
Ambient temperature	-40°C to 55°C	
Termination	QC terminal	
Unit weight	Approx.98g	
Construction	Dust protected	

- Notes:** 1) The data shown above are initial values.
2) Apply holding voltage to coil, which is 70% that of rated voltage.
3) Only for products with contact forms: 1Z, 2Z, 3Z, 1H, 2H, 3H, 1D, 2D, 3D.
4) Only for products with contact forms: QZ, QH, QD.

COIL

Coil power	DC type: Approx. 1.5W AC type: Approx. 2.5VA
------------	---

SAFETY APPROVAL RATINGS

UL/CUL	1 Form C, 2 Form C, 3 Form C 1 Form A, 2 Form A, 3 Form A 1 Form B, 2 Form B, 3 Form B	25A 415VAC, 15A 28VDC
	1 Form X, 1 Form Y, 1 Form Z	30A 415VAC, 30A 28VDC

- Notes:** 1) All values unspecified are at 55°C.

ORDERING INFORMATION

Type	HF11F	/A	12	-1Z	2	F	T	F
Coil form	A: AC NIL: DC							
Coil voltage	DC: 12, 24, 110, 220 AC: 12, 24, 120, 240							
Contact arrangement	1Z: 1 Form C 2Z: 2 Form C 3Z: 3 Form C QZ: 1 Form Z QH: 1 Form X QD: 1 Form Y 1H: 1 Form A 2H: 2 Form A 3H: 3 Form A 1D: 1 Form B 2D: 2 Form B 3D: 3 Form B							
Terminals	2: QC terminal (4.8x0.5mm) 5: QC terminal(6.4x0.8mm)							
Installation method	F: Flange mounting NIL: Standard							
Contact material	T: AgSnO ₂							
Insulation standard	F: Class F							



Notes: 1) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions



Standard cover



"2" type terminal



"5" type terminal




OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions


Flange cover

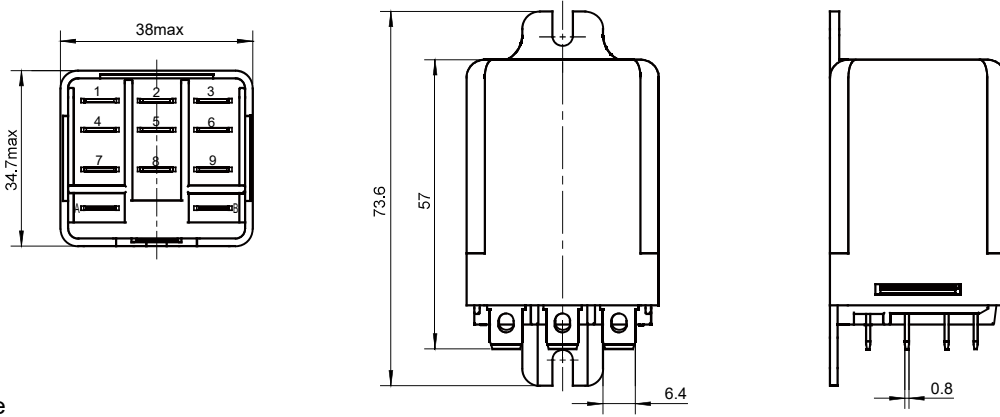

D type

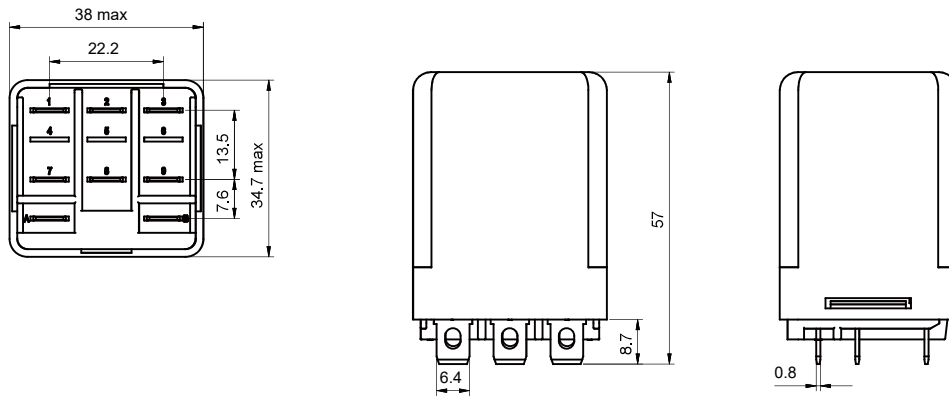


H type

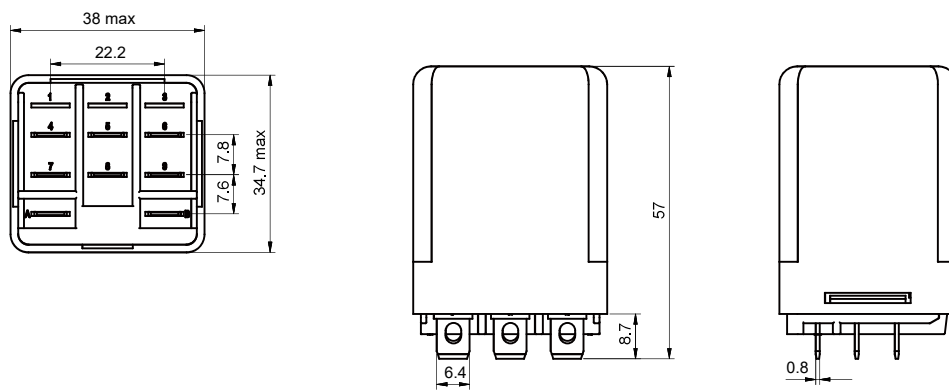


Notes: Terminal shown is Type 5; Type 2 terminal is optional.

PCB Layout (Bottom view)

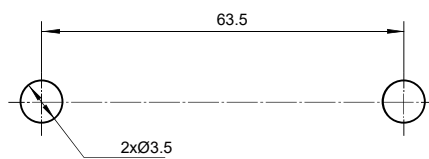

Wiring Diagram (Bottom view)

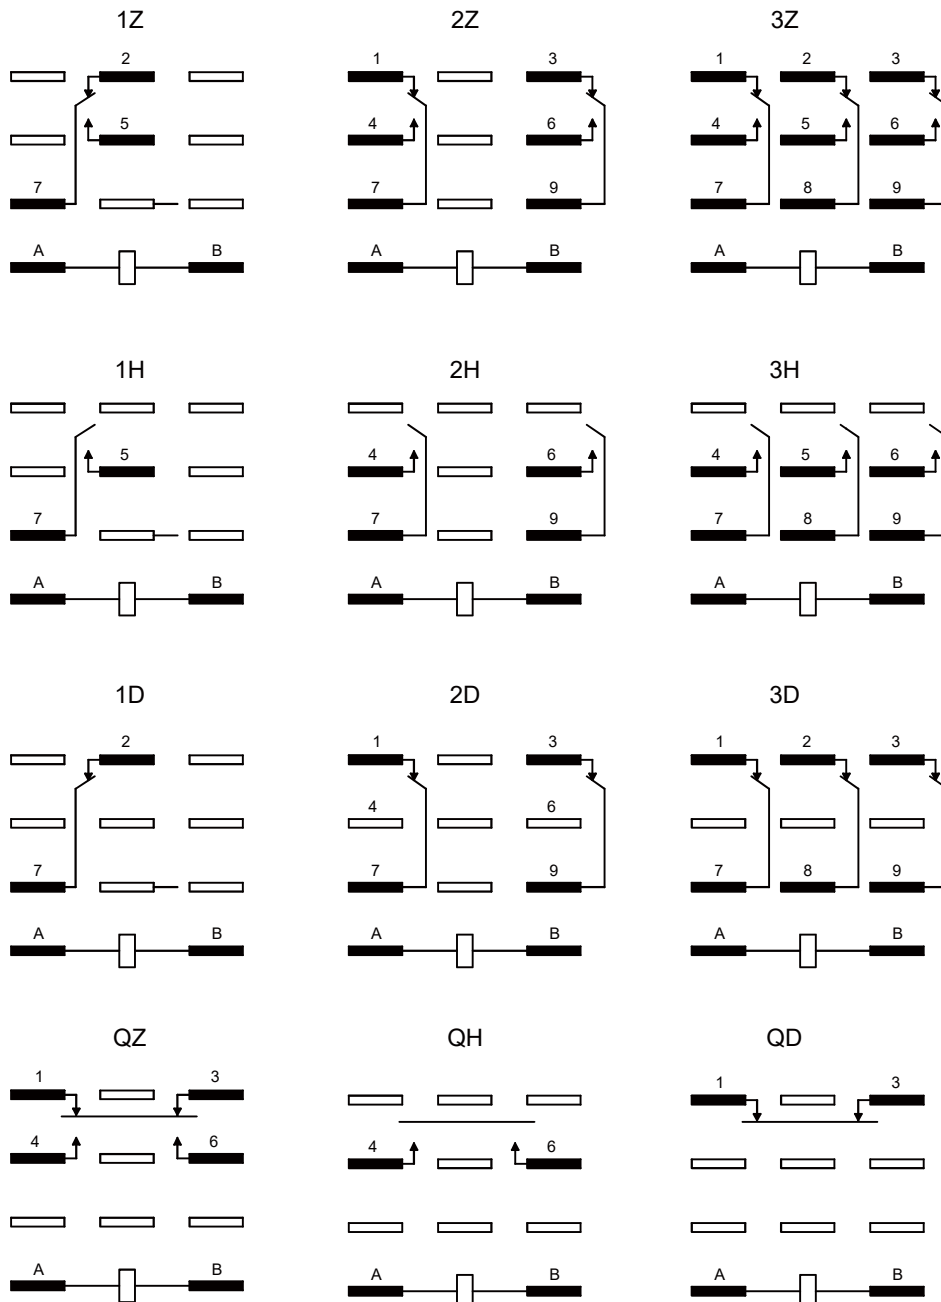

- Notes:** 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$;
2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.