

HF187F/2H

MINIATURE HIGH POWER RELAY



File No.: E133481



File No.: R 50506590



File No.: CQC21002324800



Features

- 2 Main contacts +1 Auxiliary contact
- Detection of main contact welding makes it possible to construct a safety circuit(according to IEC 60947-4-1/IEC 61810-3)
- Contact gap: 3.6 mm (Main contact),each contact
- Low coil holding voltage contributes to save energy
- Contact Category: CC2
- UL insulation system: Class F
- Fulfill 5kA short circuit current test according to UL2231-2
- Outline dimensions: (59×35×47)mm

RoHS compliant

CONTACT DATA

Contact arrangement	2A/2A+1B	
Contact resistance (initial)	Main contact	10mΩ max(6VDC 20A)
	Auxiliary contact	100mΩ max(6VDC 1A)
Contact material	Main contact: AgSnO ₂ Auxiliary contact: AgNi	
Contact rating (resistance)	Main contact	64A 480VAC
	Auxiliary contact	1A 125VAC, 1A 30VDC
Max. Switching voltage	Main contact	480VAC
	Auxiliary contact	277VAC, 30VDC
Max. Switching current	Main contact: 80A/ Auxiliary contact: 1A	
Max. Switching main	Main contact: 30720VA/ Auxiliary contact: 277VA/30W	
MIN. switching load ²⁾ (Auxiliary contact)	NC: 12VDC 100mA NC(Gold plated) : 12VDC 10mA	
Mechanical endurance	1×10 ⁵ ops	
Electrical endurance	NO: 64 A 480VAC, Resistive load, 85°C, 5×10 ⁴ ops NO: Making 32 A Carrying 80A Breaking 32A 277VAC, Resistive load, 85°C, 5×10 ⁴ ops NC:1A 125VAC/30VDC, Resistive load, 85°C, 1s on 9s off, 10×10 ⁴ ops	

Notes:1) The data shown above are initial values;
2) Min. contact load is reference value. Please perform the confirmation test with the actual load before usage since reference value may change according to switching frequencies, environmental conditions and expected life cycles.

COIL

Coil power	Approx. 4.0W
Holding voltage ¹⁾	35% to 80%U _N (at 23°C)
	40% to 60%U _N (at 85°C)

Notes:1) The coil holding voltage is the voltage applied to coil 100ms after the rated voltage;
2) To avoid overheating and burning,the coil can not be consistently applied to with voltage larger than maximum holding voltage.

CHARACTERISTICS

Insulation resistance		1000MΩ(500VDC)
Dielectric strength	Between open Main contacts	2000VAC 1min
	Between Main contact & Auxiliary contact	5000VAC 1min
	Between Main contact sets	5000VAC 1min
	Between coil & Auxiliary contacts	2000VAC 1min
	Between coil & Main contacts	5000VAC 1min
	Between open Auxiliary contacts	1000VAC 1min
Operate time (at nomi. volt.)		40ms max.
Release time (at nomi. volt.)		20ms max.
Temperature rise		70K max(Contact load current 80A, Applied voltage of coil 100% rated voltage for 100ms holding voltage of coil 60% rated voltage,at 85°C)
Shock resistance	Functional	Main Contact:98m/s ²
	Destructive	980m/s ²
Vibration resistance		Main Contact: 10Hz to 55Hz 1.0mm DA
Humidity		5% to 85%RH
Ambient temperature		-40°C to 85°C
Termination		PCB
Unit weight		Approx. 190g
Construction		Flux proofed

Notes:1) The data shown above are initial values.

COIL DATA

23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Allowable Voltage VDC ¹⁾	Coil Resistance Ω
9	6.75	0.45	9.9	20.2×(1±10%)
12	9	0.6	13.2	36×(1±10%)
24	18	1.2	26.4	144×(1±10%)
48	36	2.4	52.8	576×(1±10%)

Notes:1) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2025 Rev. 1.00

SAFETY APPROVAL RATINGS

UL/CUL	NO: Making 32 A Carrying 80A Breaking 32 A,277VAC Resistive 85°C NO: 64A 480VAC Resistive 85°C NC: 1A 277VAC/30VDC Resistive 85°C
TÜV	NO: Making 32 A Carrying 80A Breaking 32 A,277VAC Resistive 85°C NO: 64A 480VAC Resistive 85°C NC:1A 277VAC/30VDC Resistive 85°C
CQC	NO: Making 32 A Carrying 80A Breaking 32 A,277VAC Resistive 85°C NO: 64A 480VAC Resistive 85°C NC:1A 277VAC/30VDC Resistive 85°C

Notes:1) All values unspecified are at room temperature;
2) Only some typical rating are listed above.If more details are required,please contact us.

ORDERING INFORMATION

Type	HF187F/	12	-2H	B	T	F	(XXX)
Coil voltage	9,12,24,48VDC						
Contact arrangement	2H: 2 Form A						
Auxiliary contact arrangement	Nil: Standard B: 1 Form B						
Contact material	T: AgSnO ₂						
Insulation class	F: Class F						
Special code	XXX: Customer special requirement			Nil: Standard			
	991:Auxiliary contact gold plated						


Notes:1) Please avoid using the relay in an environment containing organic silicon,otherwise the entry of organic silicon into the relay may acceleration contact failure.If there are harmful substances and elements such as water vapor,H₂S,SO₂,NO₂,Cl,P,dust,etc., as well as unknown harmful substances and elements,In the use of environmental gases,it may lead to increased contact resistance and poor contact during the use of relays.In the above situations,please control the materials that produce harmful substances and elements or use plastic sealed type, and arrange relevant tests to confirm that it meet the requirements for actual use;
2) Water clearing or surface process is not suggested after the flux-proofed relays are assembled on PCB;
3) The customer special requirement express as special code after evaluating by Hongfa.
4) HF187F-2H can fulfill the short-circuit 5000 A test according to UL2231-2.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

2HB


Outline Dimensions

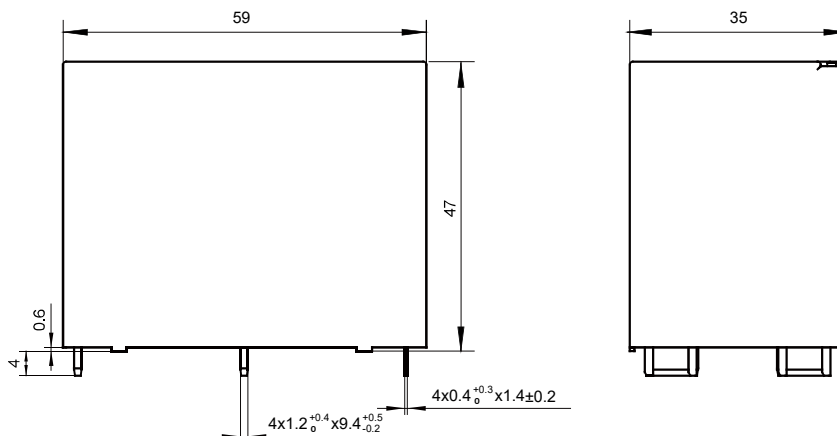


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

PCB Layout(Bottom view)

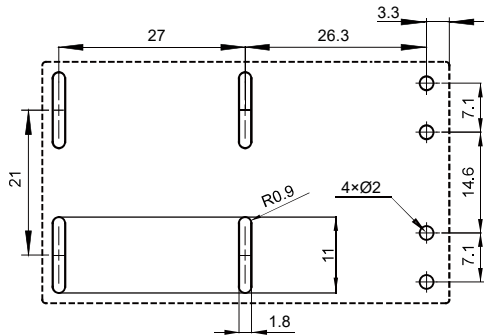


Wiring Diagram(Bottom view)

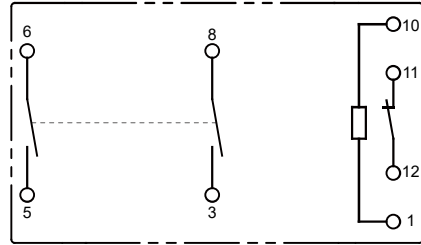


2H


Outline Dimensions

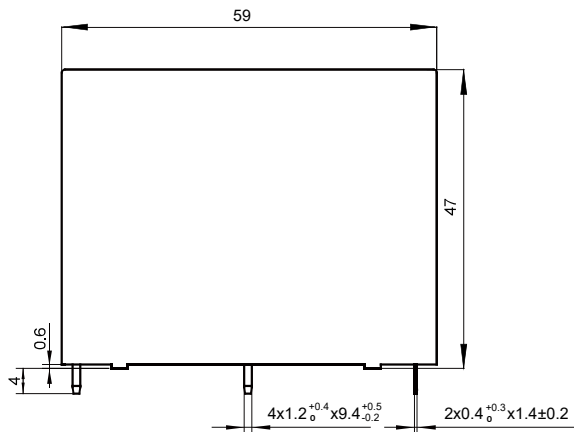

PCB Layout(Bottom view)

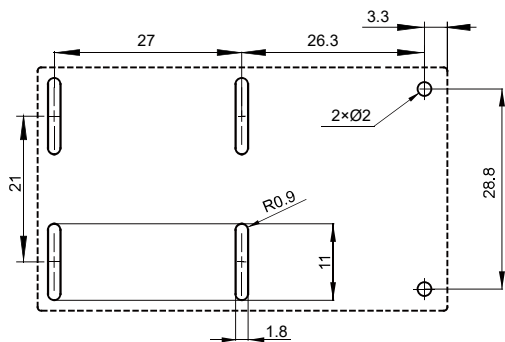

Wiring Diagram(Bottom view)

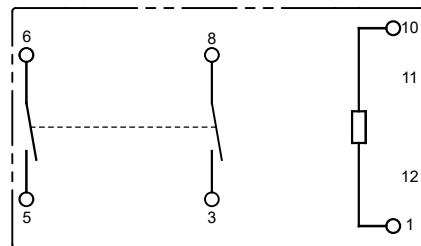

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$ and $\leq 30\text{mm}$, tolerance should be $\pm 0.4\text{mm}$; outline dimension $> 30\text{mm}$, tolerance should be $\pm 0.6\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.