

# HFV16-L

# AUTOMOTIVE RELAY



### Features

- Single coil magnetic latching relay
- 70A switching capability
- Extended temp. range up to 125°C
- Max. continuous current 80A
- Max. making current 300A
- Plastic sealed and dust protected types available
- QC terminal and PCB terminal available
- RoHS & ELV compliant
- Pin assignment similar to ISO 7588-1

### Typical Applications

Power Management, Fog lamp & headlight control, Rear window defogger, Air-conditioning, Fuel pump control, ABS, Traction control system, Cooling fan control, Battery disconnection device, High-speed fan control

## CHARACTERISTICS

Contact arrangement	1A	Shock resistance <sup>5) 10)</sup>	294m/s <sup>2</sup>
Voltage drop	Typ.: 20mV (at 10A)	Flammability <sup>6)</sup>	UL94-HB or better (meets FMVSS 302)
	Max.initial : 50mV (at 10A)	Termination	QC, PCB <sup>7)</sup>
	Max.after test : 250mV (at 10A)	Construction	Plastic sealed, Dust protected
Max. continuous current <sup>1) 10)</sup>	80A (at 23°C), 60A(at 85°C), 35A(at 125°C)	Unit weight	Approx. 38g
Max. switching current <sup>10)</sup>	Make (NO): 300A <sup>2)</sup> Break (NO):70A (Resistive, 13.5VDC)	Mechanical data <sup>8)</sup>	housing retention (pull & push): 200N min. terminal retention (pull & push): 100N min. terminal resistance to bending (front & side): 10N min. <sup>9)</sup>
Min. contact load	1A 12VDC		
Electrical endurance	See "CONTACT DATA"	1) Measured when applying 100% rated voltage pulse 30ms on the set coil.	
Mechanical endurance	1 x 10 <sup>6</sup> OPS (15OPS/min)	2) Inrush peak current under lamp load, at 13.5VDC.	
Initial insulation resistance	100MΩ (at 500VDC)	3) 1min, leakage current less than 1mA	
Withstand voltage <sup>3)</sup>	500VAC	4) The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit.	
Operate time <sup>10)</sup>	Typ.:1.5ms Max.: 10ms (at nomi. vol.)	5) When energized, opening time of NO contacts shall not exceed 100μs.	
Release time <sup>4) 10)</sup>	Typ.:1ms ,Max.: 10ms	6) FMVSS: Federal Motor Vehicle Safety Standard.	
Ambient temperature	-40°C to 125°C	7) Since it is an environmental friendly product, please select lead-free solder when welding. The recommended soldering temperature and time is (260±3)°C , (5±0.3)s.	
Vibration resistance <sup>5) 10)</sup>	5Hz to 22.3Hz 10mm DA 22.3Hz to 500Hz 98m/s <sup>2</sup>	8) Only valid for QC version.	
		9) Test point is at 2mm away from terminal end, and after removing testing force, the terminal transfiguration shall not exceed 0.3mm.	
		10) Only for the 12VDC coil voltage type.	
		11) Do NOT knock on relays with hard objects such as rubber rod and rubber hammer during mounting, which might lead to relay damage.	

## CONTACT DATA <sup>1)</sup>

Load voltage	Load type	Load current A	On/Off ratio		Electrical endurance OPS	Contact material	Load wiring diagram <sup>3)</sup>	Ambient temp.	
			On s	Off s					
13.5VDC	Resistive	Make	70	2	2	1×10 <sup>5</sup>	AgSnO <sub>2</sub>	See diagram 1	at 23°C
		Break	70						
	Inductive (L=0.16mH)	Make	150	2	4	1×10 <sup>5</sup>	AgSnO <sub>2</sub>	See diagram 2	
		Break	50						
	Lamp	Make	200 <sup>2)</sup>	2	2	1×10 <sup>5</sup>	AgSnO <sub>2</sub>	See diagram 3	
			40						
Break		300 <sup>2)</sup>	2	2	1×10 <sup>5</sup>	AgSnO <sub>2</sub>	See diagram 3		
		30							






HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2025 Rev. 1.00

- 1) Loads mentioned in this chart is for relays with no parallel diode or Zener Diode. For those with parallel diode, Zener Diode or other components, please contact Hongfa for more technical supports.  
Please also contact Hongfa if the actual application load is different from what mentioned above.
- 2) Corresponds to the peak inrush current on initial actuation (cold filament).
- 3) The load wiring diagrams are listed below:




## COIL DATA

at 23°C

Nominal voltage VDC	Set voltage <sup>1)</sup> VDC max.	Reset voltage <sup>1)</sup> VDC max.	Coil resistance x(1±10%) Ω	Max. allowable overdrive voltage <sup>2)</sup> VDC
12	7.2	7.2	25	18

- 1) The impulse width should be 10ms to 100ms. Energizing voltage mode should be acted as per the diagram below.

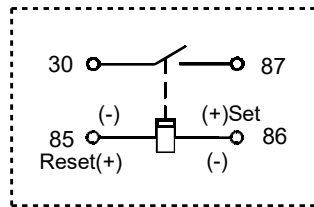

Polarity for set/reset	Set	Reset
energization	Pin85(-), Pin86(+)	Pin85(+), Pin86(-)

- 2) Max. allowable overdrive voltage is stated with no load applied and minimum coil resistance. Max. allowed infliction time is 1s.

## ORDERING INFORMATION

	<b>HFV16-L / 12 -H 1 S T Y K (XXX)</b>									
<b>Type</b>	HFV16-L: QC Latching type HFV16-LP: PCB Latching type									
<b>Coil voltage</b>	12: 12VDC									
<b>Contact arrangement</b>	H: 1 Form A									
<b>Version</b>	1: QC Terminal Nil: PCB type									
<b>Construction</b> <sup>1)</sup>	S: Plastic sealed <sup>2)</sup> Nil: Dust protected									
<b>Contact material</b>	T: AgSnO <sub>2</sub>									
<b>Terminal</b>	Y: QC Terminal without hole and 30 & 87 terminal length is 14.5mm Nil: QC Terminal with hole and 30 & 87 terminal length is 14.5mm, or PCB type									
<b>Terminal plating code</b>	K: Load terminal hot-dip Tinning, coil terminal electro-tinning Nil: Electro-tinning									
<b>Special code</b> <sup>3)</sup>	XXX: Customer special requirement Nil: Standard									




- Notes:**
- 1) In environments with high humidity, moisture, or even condensation, and dust, such as relays used in engineering, mining, agriculture and other fields, or relays with mounting brackets installed outside of electrical boxes, it is recommended to use plastic-encapsulated products; in environments containing phosphorus, H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub> and other harmful gases, plastic-encapsulated types must be used and tested and confirmed in actual use; in environments containing organic silicon, please avoid using dust-proof covers ;
  - 2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
  - 3) The performance parameters of products with characteristic numbers shall be subject to the specific specifications provided by Hongfa.

# OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm




## Outline Dimensions

HFV16-L/12-H1T□(XXX)

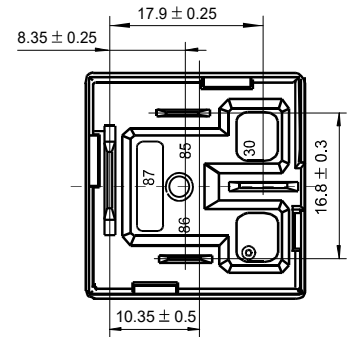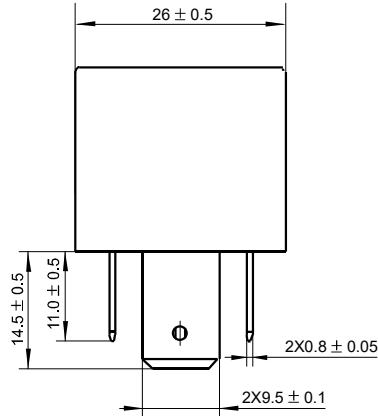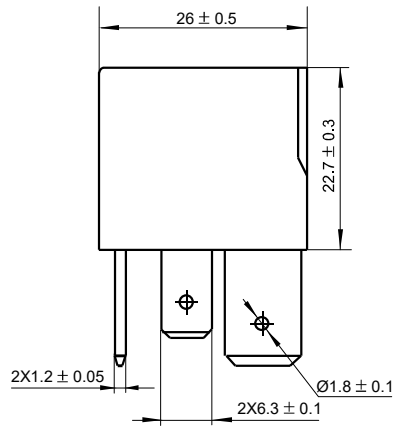




(Bottom view)

HFV16-L/12-H1ST□(XXX)

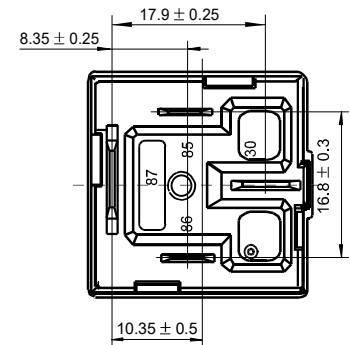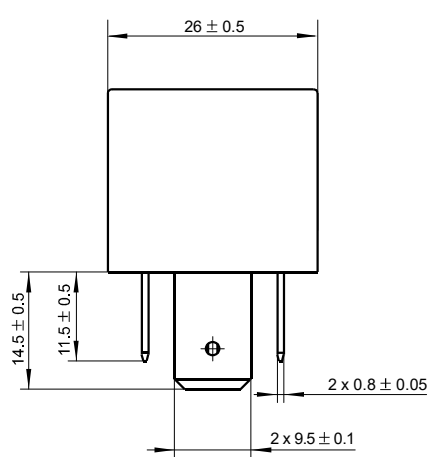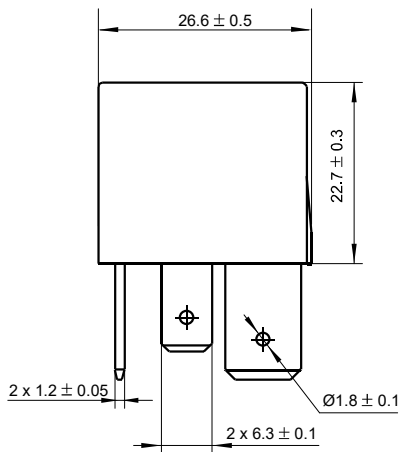

(Bottom view)

HFV16-LP/12-HT□(XXX)

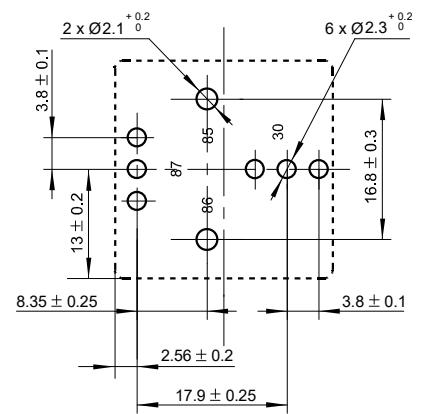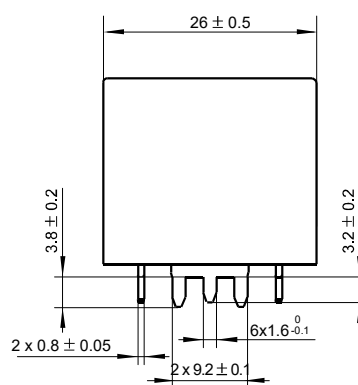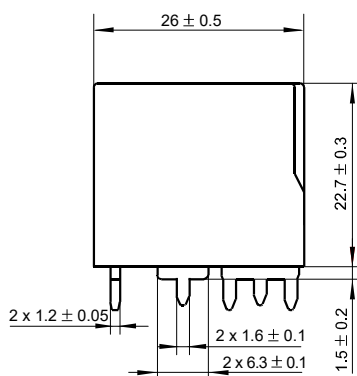




PCB Layout (Bottom view)

## OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm

### Outline Dimensions


HFV16-L/12-H2ST□(XXX)

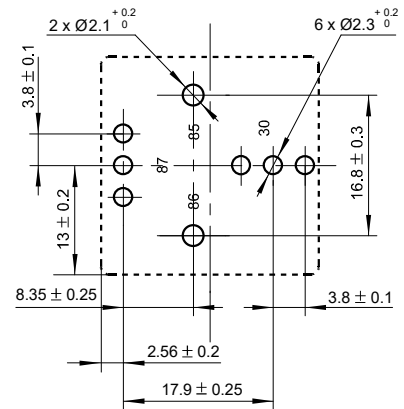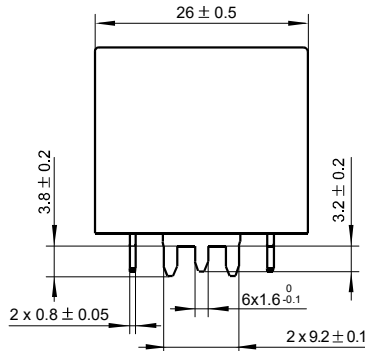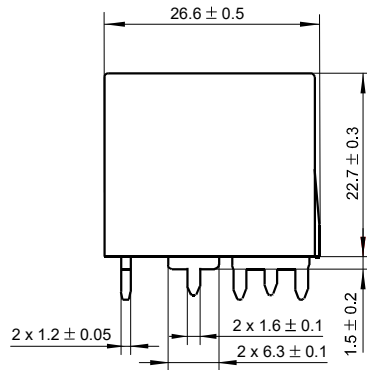

PCB Layout (Bottom view)

### Wiring Diagram


HFV16-L/12-H□□T□(XXX)

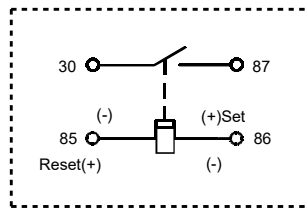

## CHARACTERISTIC CURVES

Ambient temperature curve of the electrical endurance test

Ambient temp. curve (one cycle)

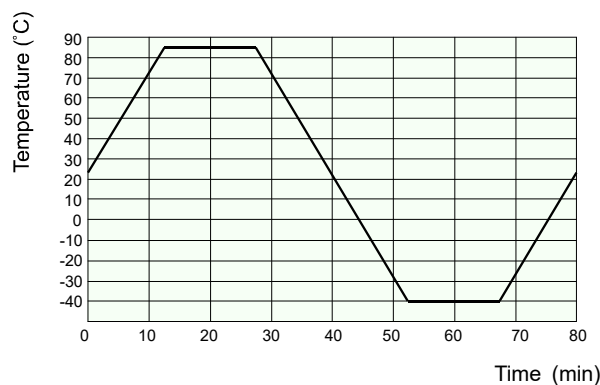

- 1) The minimum temperature is -40°C.
- 2) The maximum temperature is 85°C.

### Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. In case there is specific criterion (such as mission profile, technical specification, PPAP etc.) checked and agreed by and between customer and Hongfa, this specific criterion should be taken as standard regarding any requirement on Hongfa product. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.