



HFLS1D13-381

Plug-in terminal block

DIMENSIONAL DRAWING


OUTLINE DIMENSIONS, WIRING DIAGRAM

Unit:mm

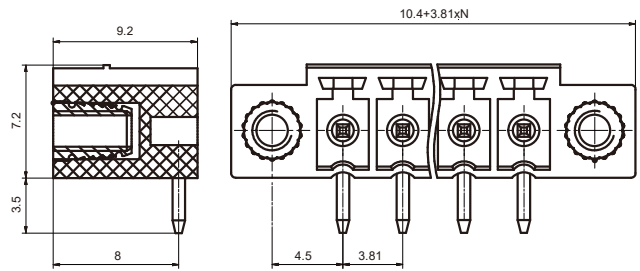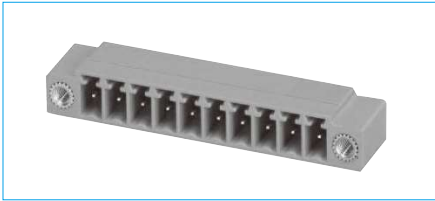

FEATURES

- Compact type socket with short needle gauge
- The plug-in direction is parallel to PCB
- With flange with thread



SPECIFICATION

Load	8A 300V (ULstandard) 8A 250V (IEC standard)
Poles	2~24
Pitch	3.81mm
Rated Dielectric Strength	1400Vac/min
Rated Withstand Pulse Voltage	2.5kV
Ambient Temperature	-40℃~105℃

- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
- 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

ORDERING DATA

TYPE	POLES	PCS/BOX
HFLS1D13-381/S2-GN	2	350
HFLS1D13-381/S3-GN	3	290
HFLS1D13-381/S4-GN	4	240
HFLS1D13-381/S5-GN	5	210
HFLS1D13-381/S6-GN	6	190
HFLS1D13-381/S7-GN	7	170
HFLS1D13-381/S8-GN	8	160
HFLS1D13-381/S9-GN	9	140
HFLS1D13-381/S10-GN	10	130
HFLS1D13-381/S11-GN	11	120
HFLS1D13-381/S12-GN	12	110
HFLS1D13-381/S13-GN	13	100
HFLS1D13-381/S14-GN	14	100
HFLS1D13-381/S15-GN	15	90
HFLS1D13-381/S16-GN	16	90
HFLS1D13-381/S17-GN	17	80
HFLS1D13-381/S18-GN	18	80
HFLS1D13-381/S19-GN	19	70
HFLS1D13-381/S20-GN	20	70
HFLS1D13-381/S21-GN	21	70
HFLS1D13-381/S22-GN	22	70
HFLS1D13-381/S23-GN	23	70
HFLS1D13-381/S24-GN	24	60

Disclaimer:

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

@ Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.