

HFV6V

AUTOMOTIVE RELAY



Typical Applications

Lighting control, Heaters (front/rear windows),
Front/rear fog lamp control

Features

- Noise level ≤ 50 dB (A)
- 30A switching capability
- Ambient temp. range up to 125°C
- 1 Form A contact arrangement
- RoHS & ELV compliant

CHARACTERISTICS

Contact arrangement	1A	Flammability ⁵⁾	UL94-HB or better (meets FMVSS 302)
Voltage drop(initial)	NO:Typ.50mV,250mV max.(at 10A)	Termination	QC ⁷⁾
Max.continuous current ¹⁾	NO:20A (at 23°C);15A (at 85°C); 8A(at 125°C)	Construction	Dust protected
Max. switching current	NO: 100A (Lamp, surge current, 13.5VDC) NO: 30A (Resistive, 13.5VDC)	Unit weight	Approx. 15g
Min. contact load	1A 12VDC	Mechanical data	cover retention (pull & push): 200N min. terminal retention (pull & push): 100N min. terminal resistance to bending (front & side): 10N min. ⁶⁾
Electrical endurance	See "CONTACT DATA"	1) For NO contacts, measured when applying 100% rated voltage on coil.	
Mechanical endurance	1 x 10 ⁶ OPS (300OPS/min)	2) 1min, leakage current less than 1mA.	
Initial insulation resistance	100MΩ (at 500VDC)	3) The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit.	
Withstand voltage ²⁾	500VAC	4) When energized, opening time of NO contacts shall not exceed 100μs, when non-energized, NO contacts shall not be closed.	
Operate time	Max.: 10ms (at nomi. vol.)	5) FMVSS: Federal Motor Vehicle Safety Standard.	
Release time ³⁾	Max.: 10ms	6) Test point is at 2mm away from terminal end, and after removing testing force, the terminal transfiguration shall not exceed 0.5mm.	
Ambient temperature	-40°C to 125°C	7) Do NOT knock on relays with hard objects such as rubber rod and rubber hammer during mounting, which might lead to relay damage.	
Vibration resistance	10Hz to 60Hz 0.35mm DA 60Hz to 500Hz 49m/s ²		
Shock resistance ⁴⁾	196m/s ²		



CONTACT DATA

at 23°C

Load voltage	Load type		Load current A		On/Off ratio		Electrical endurance OPS	Contact material	Load wiring diagram ²⁾
			1A		On s	Off s			
13.5VDC	Resistive	Make	20		2	2	1×10 ⁵	AgSnO ₂	See diagram 1
		Break	20		2	2			
	Inductive	Make	40 ¹⁾		2	2	1×10 ⁵	AgSnO ₂	See diagram 2
		Break	10		2	2			

Notes: 1) Corresponds to the peak inrush current on initial actuation (cold filament).

2) The load wiring diagrams are listed below:



3) Please also contact Hongfa if the actual application load is different from what mentioned above.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2025 Rev. 1.00

COIL DATA at 23°C

Nominal voltage VDC	Pick-up voltage VDC max.	Drop-out voltage VDC min.	Coil resistance x(1±10%)	Parallel resistance x(1±5%) Ω	Equivalent resistance x(1±10%)Ω	Power consumption W	Max. allowable overdrive voltage ¹⁾ VDC	
							at 23°C	at 85°C
12	7.2	1.2	254	—	—	0.567	20	16
12	7.2	1.2	254	1200	209.6	0.687	20	16

Notes: 1) Max. allowable overdrive voltage is stated with no load applied.

ORDERING INFORMATION

	HFV6V / 12 -H T -R (XXX)
Type	
Coil voltage	012: 12VDC
Contact arrangement	H: 1 Form A
Contact material	T: AgSnO ₂
Parallel coil components	R: Parallel transient suppression resistors Nil: Without parallel components
Special code¹⁾	XXX: Customer special requirement Nil: Standard


Notes: 1) The customer special requirement express as special code after evaluating by Hongfa. e.g. (170) stands for flasher load. The performance parameters of products with characteristic numbers shall be subject to the specific specifications provided by Hongfa.

OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm

Outline Dimensions


HFV6V/12-HT(XXX)

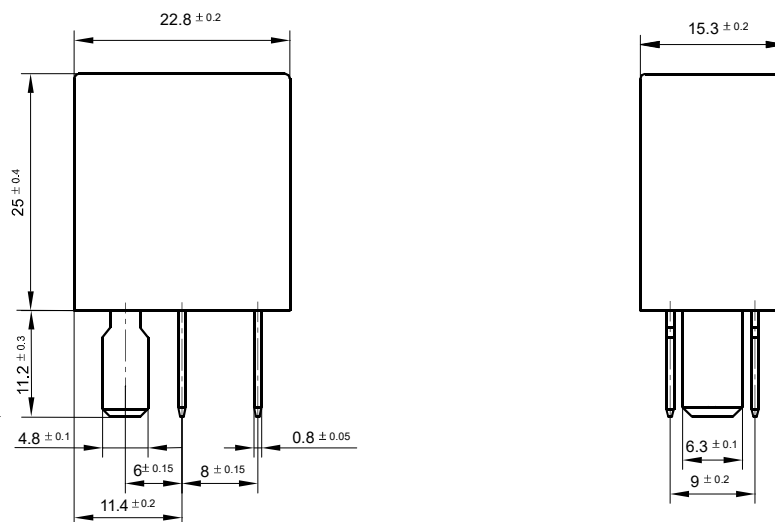


(Bottom view)

Wiring Diagram

HFV6V/12-HT(XXX)



HFV6V/12-HT-R(XXX)



Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. In case there is specific criterion (such as mission profile, technical specification, PPAP etc.) checked and agreed by and between customer and Hongfa, this specific criterion should be taken as standard regarding any requirement on Hongfa product.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.