

# HFD3

# SUBMINIATURE SIGNAL RELAY




File No.:E133481



File No.:40018867



File No.:CQC1400207409

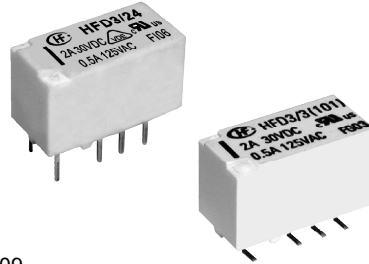

## Features

- Surge withstand voltage up to 2500VAC, meets FCC Part 68 and Telecordia
- Contact arrangement: 2 Form A, 2 Form C available
- Meets EN60950 / EN41003
- SMT and DIP types available
- Bifurcated contacts
- Single side stable and latching type available

**RoHS compliant**

## CONTACT DATA

Contact arrangement	2A,2C
Contact resistance	100mΩ max.(at 10mA 30mVDC)
Contact material	AgNi + Au plated
Contact rating (Res. load)	2A 30VDC 3A 30VDC 0.5A 125VAC
Max. switching current	4A
Max. switching voltage	277VAC / 220VDC
Max. switching power	62.5VA / 90W
Min. applicable load <sup>1)</sup>	10mV 10μA
Mechanical endurance	1 x 10 <sup>9</sup> Ops
Electrical endurance <sup>2)</sup>	1 x 10 <sup>5</sup> Ops (0.5A 125VAC, Resistive load, AgNi + Au plated, at 85°C, 1s on 9s off)

**Notes:** 1) Min. applicable load is reference value. Please perform the confirmation test with the actual load before production since reference value may change according to switching frequencies, environmental conditions and expected contact resistance and reliability.  
2) Electric endurance data are collected in one pair CO contact test.

## SAFETY APPROVAL RATINGS

UL/CUL	AgNi + Au plated	2A 30VDC at 85°C
		3A 30VDC at 85°C
		0.5A 125VAC at 85°C
VDE	AgNi + Au plated	2A 30VDC at 85°C
		3A 30VDC at 70°C
		0.5A 125VAC at 85°C

**Notes:** 1) All values unspecified are at room temperature.  
2) Only typical loads are listed above. Other load specifications can be available upon request.

## CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	2000VAC 1min
	Between open contacts	1000VAC 1min
	Between contact sets	1500VAC 1min
Surge withstand voltage	1500V (FCC part 68) 2500V (Telecordia)	
Operate time (Set time)	4ms max.	
Release time (Reset time)	4ms max.	
Ambient temperature	-40°C to 85°C	
Humidity	5% to 85% RH	
Vibration resistance	10Hz to 55Hz 3.3mm DA	
Shock resistance	Functional	735m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Termination	THT, SMT	
Unit weight	Approx. 2.3g	
Moisture sensitivity levels (Only for SMT type, JEDEC-STD-020)	MSL-3	
Construction	Plastic sealed	

**Notes:** 1) The data shown above are initial values.  
2) UL insulation system: Class A

## COIL

Coil power	Single side stable	Approx. 140mW
	1 coil latching	Approx. 100mW
	2 coils latching	Approx. 200mW
Temperature rise	50K max.	



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2026 Rev. 1.00

**COIL DATA**

at 23°C

**Single side stable**

Coil Code	Nominal Voltage VDC <sup>1)</sup>	Initial Set Voltage VDC <sup>1)</sup> max. <sup>1)</sup>	Initial Reset Voltage VDC <sup>1)</sup> max. <sup>1)</sup>	Coil Resistance Ω	Nominal Power mW approx.	Max. Voltage VDC <sup>5)</sup>
HFD3/1.5	1.5	1.13	0.15	16 x (1±10%)	140	3.0
HFD3/2.4	2.4	1.8	0.24	41 x (1±10%)	140	4.8
HFD3/3	3	2.25	0.3	64.3 x (1±10%)	140	6.0
HFD3/4.5	4.5	3.38	0.45	145 x (1±10%)	140	9.0
HFD3/5	5	3.75	0.5	178 x (1±10%)	140	10
HFD3/6	6	4.5	0.6	257 x (1±10%)	140	12
HFD3/9	9	6.75	0.9	579 x (1±10%)	140	18
HFD3/12	12	9	1.2	1028 x (1±10%)	140	24
HFD3/24	24	18	2.4	4114 x (1±10%)	140	48
HFD3/48	48	36	4.8	8533 x (1±10%)	270	62.5

**1 coil latching**

Coil Code	Nominal Voltage VDC <sup>1)</sup>	Initial Set Voltage VDC <sup>1)</sup> max. <sup>1)</sup>	Initial Reset Voltage VDC <sup>1)</sup> max. <sup>1)</sup>	Coil Resistance Ω	Nominal Power mW approx.	Max. Voltage VDC <sup>5)</sup>
HFD3/1.5-L1	1.5	1.13	1.13	22.5 x (1±10%)	100	3.0
HFD3/2.4-L1	2.4	1.8	1.8	58 x (1±10%)	100	4.8
HFD3/3-L1	3	2.25	2.25	90 x (1±10%)	100	6.0
HFD3/4.5-L1	4.5	3.38	3.38	203 x (1±10%)	100	9.0
HFD3/5-L1	5	3.75	3.75	250 x (1±10%)	100	10
HFD3/6-L1	6	4.5	4.5	360 x (1±10%)	100	12
HFD3/9-L1	9	6.75	6.75	810 x (1±10%)	100	18
HFD3/12-L1	12	9	9	1440 x (1±10%)	100	24
HFD3/24-L1	24	18	18	5760 x (1±10%)	100	48

**2 coils latching**

Coil Code	Nominal Voltage VDC <sup>1)</sup>	Initial Set Voltage VDC <sup>1)</sup> max. <sup>1)</sup> VDC <sup>1)</sup>	Initial Reset Voltage VDC <sup>1)</sup> max. <sup>1)</sup>	Coil Resistance Ω	Nominal Power mW approx.	Max. Voltage VDC <sup>5)</sup>
HFD3/1.5-L2	1.5	1.13	1.13	11.2 x (1±10%)	200	3.0
HFD3/2.4-L2	2.4	1.8	1.8	29 x (1±10%)	200	4.8
HFD3/3-L2	3	2.25	2.25	45 x (1±10%)	200	6.0
HFD3/4.5-L2	4.5	3.38	3.38	101 x (1±10%)	200	9.0
HFD3/5-L2	5	3.75	3.75	125 x (1±10%)	200	10
HFD3/6-L2	6	4.5	4.5	180 x (1±10%)	200	12
HFD3/9-L2	9	6.75	6.75	405 x (1±10%)	200	18
HFD3/12-L2	12	9	9	720 x (1±10%)	200	24
HFD3/24-L2	24	18	18	2880 x (1±10%)	200	48


## COIL DATA

at 23°C

Notes:1) The data shown above are initial values.

2) To supply rated step voltage to coil is the foundation of relay proper operation. Please make sure the applied voltage to the coil reach at rated values.

Please refer to the typical diagram below for single side stable relay. The "V\_coil" is the rated voltage:

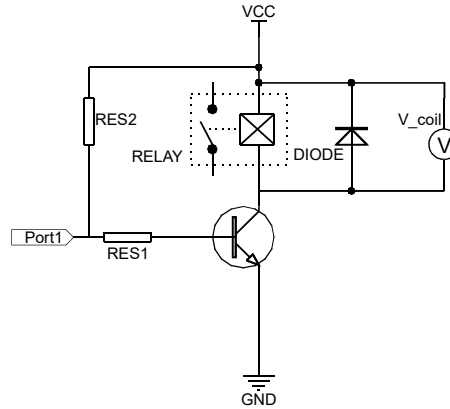

3) In case 5V of transistor drive circuit, it is recommended to use 4.5V type relay, and 3V to use 2.4V type relay.

4) For monostable relays, if you need to drop down voltage and hold mode after reliably operating, make sure that the effective value of holding voltage is not less than 60% of the rated voltage.

5) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

6) When user's requirements can't be found in the above table, special order allowed.

7) During the relay pick-up or drop-out processes, there are stages of contact pressure change, contact vibration and unstable contact etc. When the voltage applied to coil is gradually changed, it will lengthen the unstable stage and affect relay endurance. To reduce this influence, please apply step voltage (switching circuit) to relay coil.

## ORDERING INFORMATION

	<b>HFD3 / 24 -2H -L2 S R (XXX)</b>
<b>Type</b>	
<b>Coil voltage</b>	1.5, 2.4, 3, 4.5, 5, 6, 9, 12, 24, 48VDC <sup>1)</sup>
<b>Contact arrangement</b>	<b>2H:</b> 2 Form A <b>Nil:</b> 2 Form C
<b>Sort</b>	<b>L1:</b> 1 coil latching <b>Nil:</b> Single side stable <b>L2:</b> 2 coils latching(Only for 2 Form C)
<b>Terminal type</b>	<b>S:</b> Standard SMT <b>S1:</b> Short terminal SMT <b>Nil:</b> THT <sup>2)</sup>
<b>Packing style</b>	<b>R:</b> Tape and reel packing (Only for SMT type) <sup>3)</sup> <b>Nil:</b> Tube packing(Only for THT type)
<b>Special code<sup>4)</sup></b>	<b>XXX:</b> Customer special requirement <b>Nil:</b> Standard

Notes: 1) 48VDC coil voltage is only for single side stable version.

2) THT relays: Use wave or manual soldering. Confirm reflow soldering feasibility with us first.

3) R type (tape and reel) packing is moisture-proof which meets requirement of MSL-3. Please choose R type packing for SMT products. For R type, the letter "R" will only be printed on packing tag but not on relay cover. Tube packing is normally not available for SMT products unless specially requested by customer. But please note that tube packing is not moisture-proof so please bake the products before use according to description of Notice 11 herewith. In addition, tube packaging will be adopted when the ordering quantity of R type is equal to or less than 100 pieces unless otherwise specified.

4) The customer special requirement express as special code after evaluating by Hongfa. e.g.(131): The Dielectric strength between coil & contacts is 3000VAC 1min for single side stable and 1 coil latching version.

5) When coil sort, terminal type or packing style are needed, please add "-" after coil voltage is selected. For instance, HFD3/12-SR.

6) The standard tube length is 624mm, Any special requirement needed, please contact us for more details.

7) For products that should meet the explosion-proof requirements of "IEC 60079 series", please note [Ex] after the specification while placing orders. Not all products have explosion-proof certification, so please contact us if necessary, in order to select the suitable products.

# OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT



Unit: mm

## 2H Type



### Outline Dimensions

### PCB Layout (Bottom view)



THT type

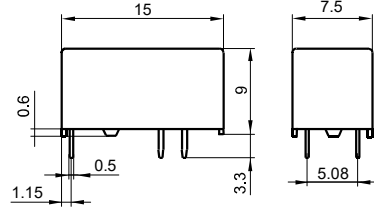

S type: Standard SMT

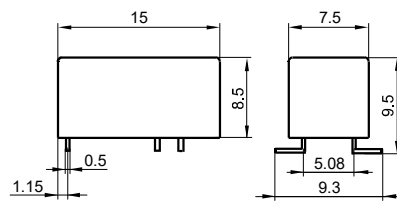

S1 type: Short terminal SMT

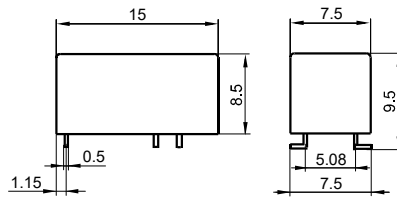


### Wiring Diagram

(Bottom view)


(Please pay attention to the coil polarity. Please determine the polarity by the wiring diagram and pin diagram)

#### Single side stable



No energized condition


#### 1 coil latching



Reset condition

#### Single side stable & 1 coil latching

Pin Layout

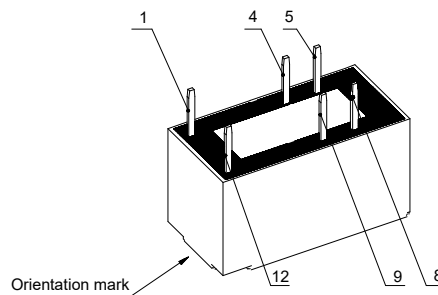

# OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

## 2Z Type



### Outline Dimensions

### PCB Layout (Bottom view)

THT type



Single side stable & 1 coil latching

Single side stable & 1 coil latching

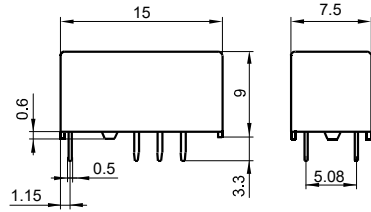

2 coils latching



2 coils latching

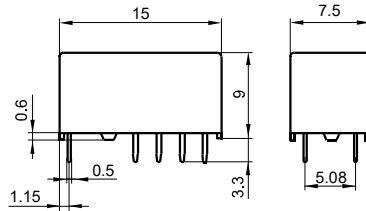

S type: Standard SMT



Single side stable & 1 coil latching

Single side stable & 1 coil latching

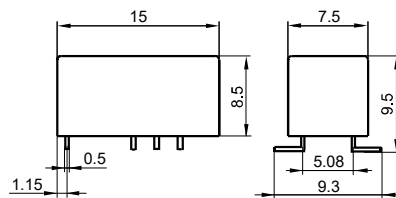

2 coils latching

2 coils latching

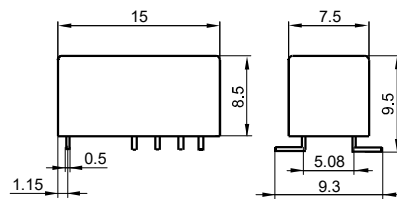

# OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

## 2Z Type



### Outline Dimensions

### PCB Layout (Bottom view)

S1 type: Short terminal SMT



Single side stable & 1 coil latching

Single side stable & 1 coil latching

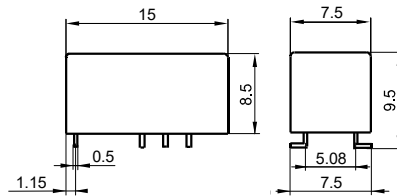

2 coils latching

2 coils latching

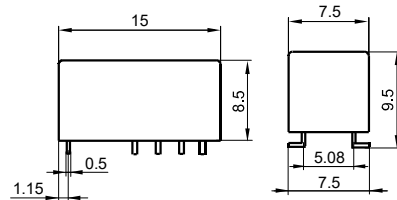

Single side stable


1 coil latching

2 coils latching


### Wiring Diagram

(Bottom view)


(Please pay attention to the coil polarity. Please determine the polarity by the wiring diagram and pin diagram)



No energized condition



Reset condition





Reset condition

Single side stable & 1 coil latching


2 coils latching

### Pin Layout

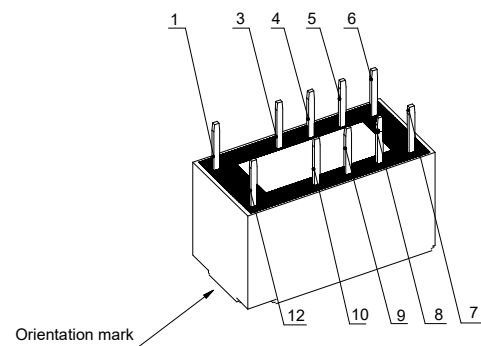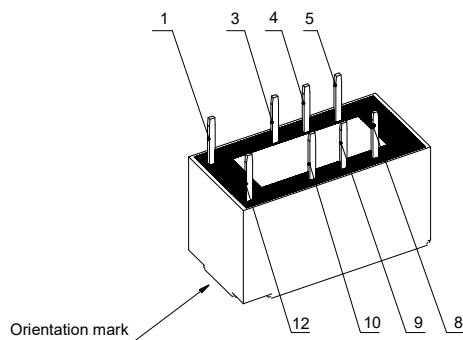


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .  
 2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .  
 3) The width of the gridding is 2.54mm.

**Direction of Relay Insertion**

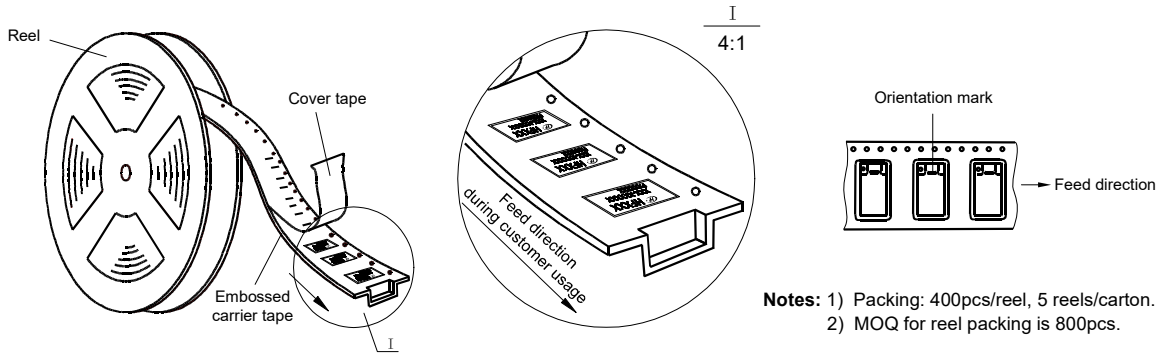

**Direction of Relay Insertion**

**Reel Dimensions**

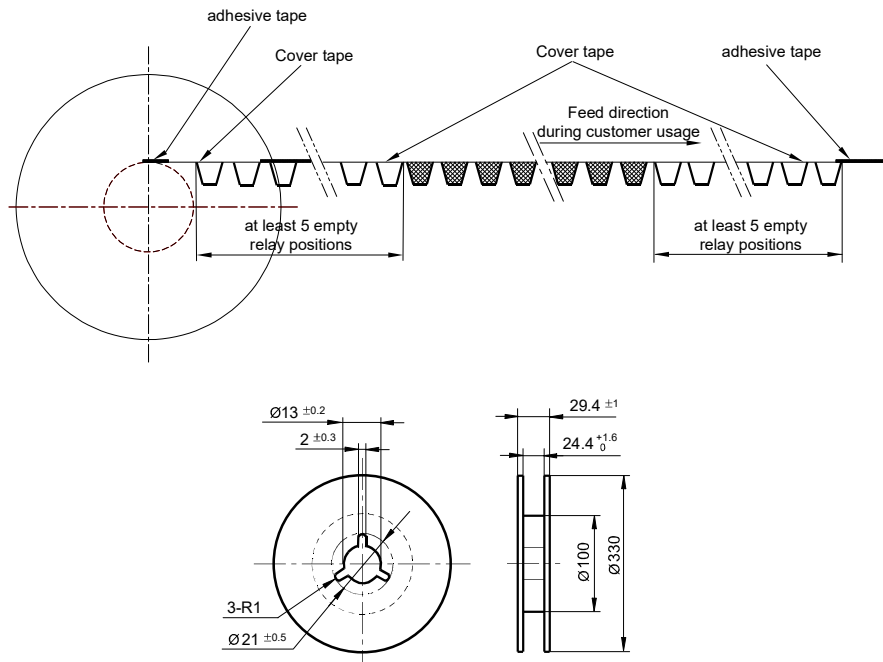

**Tape Dimensions (S type: Standard SMT)**

