

# HF32FA-G

# SUBMINIATURE INTERMEDIATE POWER RELAY




File No.:E134517



File No.:40006182



File No.:CQC09002028689(Compliant with GB/T 14536.1-2022;GB/T21711.1-2023)  
CQC23001382245(Compliant with GB 4943.1-2022;IEC 61810-1:2015)

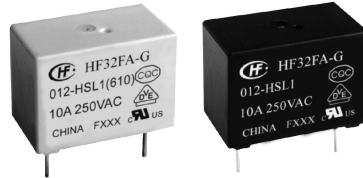

## Features

- 10A switching capability
- Creepage/clearance distance > 8mm
- 5kV dielectric strength (between coil and contacts)
- UL insulation system: Class F
- Meets VDE 0700, 0631 reinforce insulation
- TV-5 compliant products are available
- Product in accordance to IEC 60335-1 available

**RoHS compliant**

## CONTACT DATA

Contact arrangement	1A
Contact resistance <sup>1)</sup>	70mΩ max.(at 1A 6VDC)
Contact material	AgSnO <sub>2</sub>
Contact rating (Res. Load)	10A 250VAC
Max. switching voltage	250VAC
Max. switching current	10A
Max. switching power	2500VA
Mechanical endurance	1 x 10 <sup>6</sup> OPS
Electrical endurance	1.5 x 10 <sup>4</sup> OPS (10A 250VAC, Resistive load, at 85°C, 1s on 9s off)

**Notes:** 1) The data shown above are initial values.

## CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
Operate time (at rated. volt.)	8ms max.	
Release time (at rated. volt.)	4ms max.	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 85°C	
Shock resistance*	Functional	98m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance*	10Hz to 55 Hz 1.65mm DA	
Termination	PCB	
Unit weight	Approx.4.6g	
Construction	Plastic sealed, Flux proofed	

- Notes:** 1) \*Index is not in relay length direction.  
2) The data shown above are initial values.  
3) Please find coil temperature curve in the characteristic curves below.  
4) For plastic sealed type, the venting-hole should be excised in electrical endurance test.

## COIL

Coil power	Standard: Approx. 450mW; Sensitive: Approx. 230mW
------------	--

## COIL DATA

at 23°C

### Standard type

Nominal Voltage VDC	Pick-up Voltage VDC max. <sup>1)</sup>	Drop-out Voltage VDC min. <sup>1)</sup>	Max. Voltage VDC <sup>2)</sup>	Coil Resistance Ω
3	2.25	0.15	3.9	20 x (1±10%)
5	3.75	0.25	6.5	55 x (1±10%)
6	4.50	0.30	7.8	80 x (1±10%)
9	6.75	0.45	11.7	180 x (1±10%)
12	9.00	0.60	15.6	320 x (1±10%)
18	13.5	0.90	23.4	720 x (1±10%)
24	18.0	1.20	31.2	1280 x (1±10%)
48 <sup>3)</sup>	36.0	2.40	62.4	5120 x (1±10%)

### Sensitive type

Nominal Voltage VDC	Pick-up Voltage VDC max. <sup>1)</sup>	Drop-out Voltage VDC min. <sup>1)</sup>	Max. Voltage VDC <sup>2)</sup>	Coil Resistance Ω
3	2.25	0.15	5.1	38 x (1±10%)
5	3.75	0.25	8.5	108 x (1±10%)
6	4.50	0.30	10.2	155 x (1±10%)
9	6.75	0.45	15.3	350 x (1±10%)
12	9.00	0.60	20.4	620 x (1±10%)
18	13.5	0.90	30.6	1390 x (1±10%)
24	18.0	1.20	40.8	2480 x (1±10%)
48 <sup>3)</sup>	36.0	2.40	81.6	9920 x (1±10%)

- Notes:** 1) The data shown above are initial values.  
2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.  
3) For products with rated voltage ≥ 48V, measures should be taken to prevent coil overvoltage in order to protect coil in test and application (eg. Connect diodes in parallel).

## SAFETY APPROVAL RATINGS

UL/CUL	10A 250VAC at 85°C B300
VDE	10A 250VAC at 85°C

- Notes:** 1) All values unspecified are at room temperature.  
2) Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2026 Rev. 1.00


## ORDERING INFORMATION

Type	HF32FA-G / 012 -H S L 1 G (XXX)					
Coil voltage	3, 5, 6, 9, 12, 18, 24, 48VDC					
Contact arrangement	H: 1 Form A					
Construction <sup>1)2)</sup>	S: Plastic sealed		Nil: Flux proofed			
Coil power	L: Sensitive		Nil: Standard			
Termination	1: Type 1		2: Type 2			
Contact plating <sup>3)</sup>	G: Gold plated		Nil: No gold plated			
Special code <sup>4)</sup>	XXX: Customer special requirement			Nil: Standard		

- Notes:**
- 1) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.). We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc).
  - 2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
  - 3) For gold plated type, the min. switching current and min. switching voltage is 10mA 5VDC.
  - 4) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).
  - 5) Two packing methods available: paper box package, tube package, Standard tube packing length is 535mm. Any special requirement needed, please contact us for more details.
  - 6) For products that should meet the explosion-proof requirements of "IEC 60079 series", please note [Ex] after the specification while placing orders. Not all products have explosion-proof certification, so please contact us if necessary, in order to select the suitable products.




## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

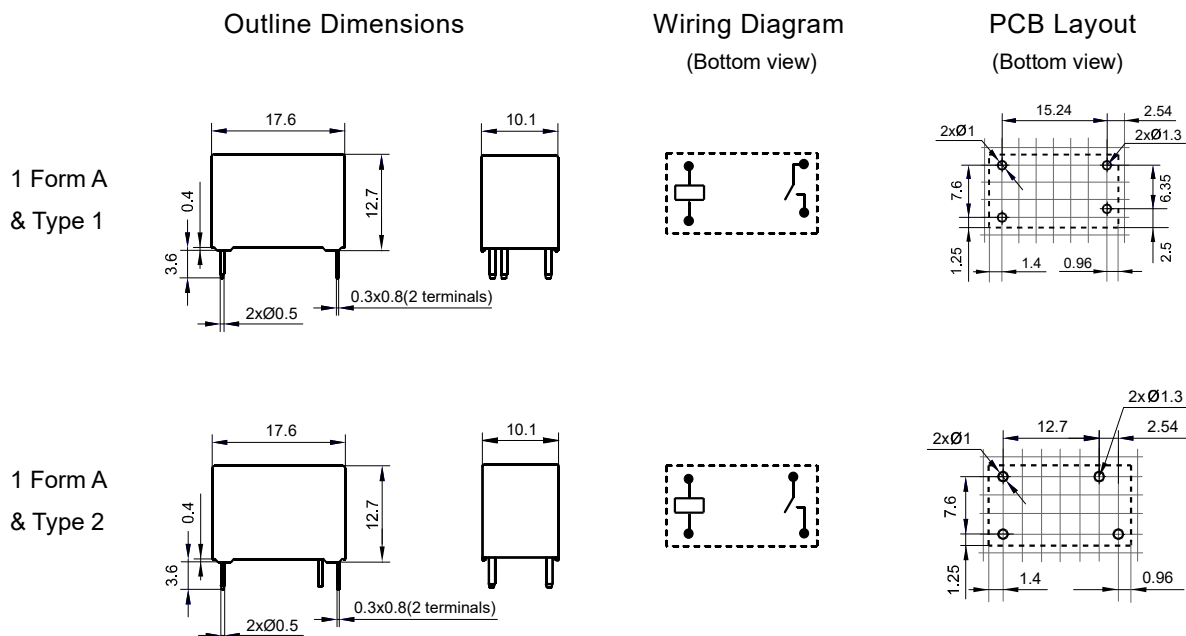

- Remark:**
- 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .
  - 2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .
  - 3) The width of the gridding is 2.54mm.

## CHARACTERISTIC CURVES

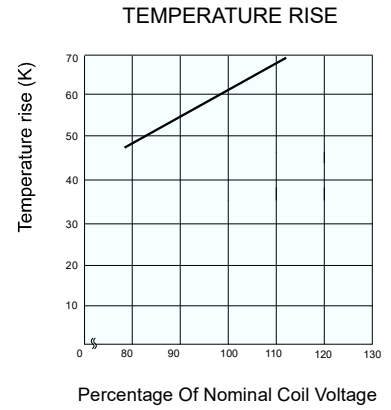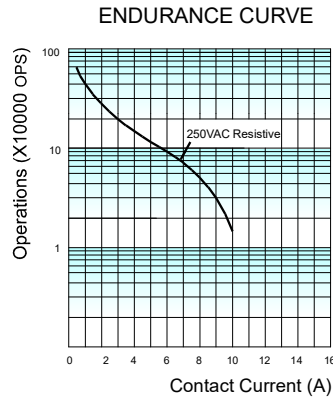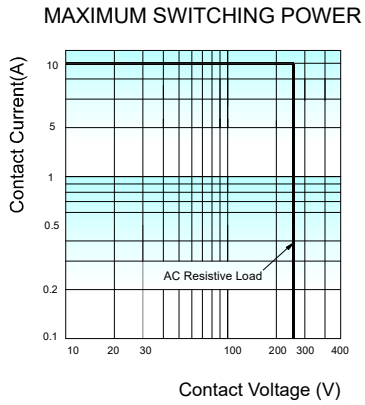

**Test conditions:** Flux proofed, at 85°C  
5s on 5s off

### Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.