

# HFA4A

# FORCE-GUIDED RELAY




File No.:E133481



File No.:R50489710



File No.:CQC20002278708



## Features

- Forcibly guided contacts according to IEC61810-3 (EN50205)
- 8A switching capability
- 4kV dielectric strength(between coil and contacts)
- UL insulation system: Class F available
- Dimensions(LxWxH): 40.0mm x13mm x15.7mm

RoHS compliant

## CONTACT DATA

Contact arrangement	2NO+2NC 3NO+1NC
Forcibly guided contacts Type (according to EN50205)	Type A
Contact resistance <sup>1)</sup>	100mΩ(at 6VDC 100mA)
Contact material	AgSnO <sub>2</sub> + Au plated
Contact rating (Res. load)	8A 250VAC/30VDC
Max. switching voltage	400VAC(at 3.5A Res.Load)
Max. switching current	8A
Min.contact load <sup>2)</sup>	5VDC 10mA
Max. switching capacity	2000VA /240W
Contact rating DC-13	1NO:3A 24VDC(1sON:9sOFF)
Contact rating AC-15	1NO:3A 250VAC(1sON:9sOFF)
Mechanical endurance <sup>3)</sup>	1 x 10 <sup>7</sup> ops
Electrical endurance	1 x 10 <sup>4</sup> OPS (1NO: 85°C, 1s on 9s off, 8A 250VAC, Resistive load)

Notes: 1) The data shown above are initial values.

2) Min. contact load is just a reference value in normal temperature, normal humidity, normal pressure environment and with relay pin up, which will vary depending on the power-on and off frequency, environmental conditions, expected lifespan, and installation direction. Thus, please have confirmation tests with actual load before use. And it is recommended to avoid using the relay when the temperature is below 0°C.

3) No loading test, no mechanical damage after the test.

## COIL

Coil power	Approx. 800mW
Holding Voltage <sup>1)</sup>	50% to 100%U <sub>N</sub> (at 23°C) 60% to 100%U <sub>N</sub> (at 85°C)

Notes: 1) The coil holding voltage is the voltage applied to coil 100ms after the rated voltage.

## SAFETY APPROVAL RATINGS

UL/CUL	8A 250VAC cos(phi)=1 85°C 8A 30VDC L/R=0 85°C NO:B300 R300 85°C NO:3.5A 400VAC
TÜV	8A 250VAC cos(phi)=1 85°C 8A 30VDC L/R=0 85°C NO:3A 250VAC(AC-15) 85°C NO:3A 24VDC(DC-13) 85°C

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

## CHARACTERISTICS

Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	4000VAC 1 min
	Between contacts sets	2500VAC 1min
	Between open contacts	1500VAC 1 min
Surge voltage (Between coil & contacts)		10kV (1.2 / 50μs)
Operate time (at rated voltage)		20ms max.
Release time (at rated voltage)		10ms max.
Temperature rise (at rated voltage)		70K max. (2NO Contact load current 8A, rated voltage excitation, at 85°C)
Shock resistance	Functional	10g(NO)
	Destructive	100g
Vibration resistance		10Hz to 200Hz 10g(NO)
Humidity		5% to 85% RH
Ambient temperature		-40°C to 85°C
Termination		PCB
Unit weight		Approx. 15g
Construction		Plastic sealed

Notes: 1) The data shown above are initial values.

## COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC Max. <sup>1)</sup>	Drop-out Voltage VDC Min. <sup>1)</sup>	Max. Voltage VDC <sup>2)</sup>	Coil resistance Ω
5	3.8	0.5	7.5	31 x (1±10%)
6	4.5	0.6	9	45 x (1±10%)
9	6.8	0.9	13.5	101 x (1±10%)
12	9	1.2	18	180 x (1±10%)
15	11.3	1.5	22.5	281 x (1±10%)
18	13.5	1.8	27	405x (1±10%)
21	16	2.1	31.5	551 x (1±10%)
24	18	2.4	36	720 x (1±10%)
36	27	3.6	54	1620x (1±10%)
40	30	4	60	2000x (1±10%)
48	36	4.8	72	2880x (1±10%)
60	45	6	90	4500 x (1±15%)
85	63.8	8.5	127.5	9031 x (1±15%)
110	83	11	165	15125x (1±15%)

Notes: 1) The data shown above are initial values.

2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2024 Rev. 1.00

## ORDERING INFORMATION

Type	HFA4A /	12-	2H2D	S	T	F	G	(XXX)
Coil voltage	5,6,9,12,15,18,21,24, 36,40,48,60,85,110VDC							
Contact arrangement	2H2D: 2NO+2NC 3H1D: 3NO+1NC							
Construction	S: Plastic sealed							
Contact material	T: AgSnO <sub>2</sub>							
Insulation standard	F: Class F							
Contact plating	G: Au plated							
Special code <sup>3)</sup>	XXX: Customer special requirement			Nil: Standard				


**Notes:** 1) Flux-proofed relays can not be used in the environment with pollutants like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.  
 2) Water cleaning or surface process is not suggested after the flux-proofed relays are assembled on PCB  
 3) The customer special requirement express as special code after evaluating by hongfa.

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


HFA4A/□□-2H2D STFG(□□□)

Outline Dimensions

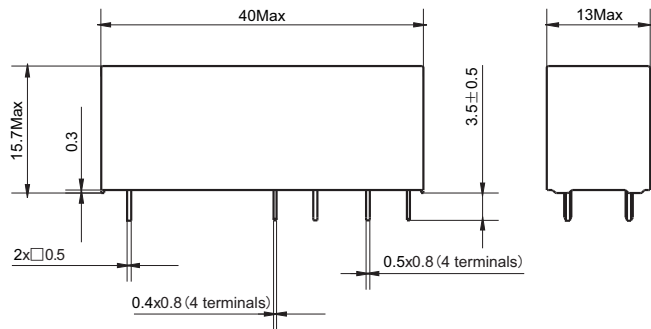


Wiring Diagram

(Bottom view)

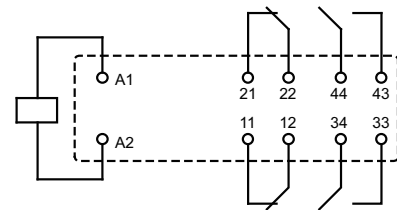

PCB Layout

(Bottom view)

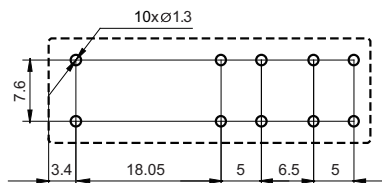


## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

HFA4A/□□-3H1D STFG(□□□)


Outline Dimensions

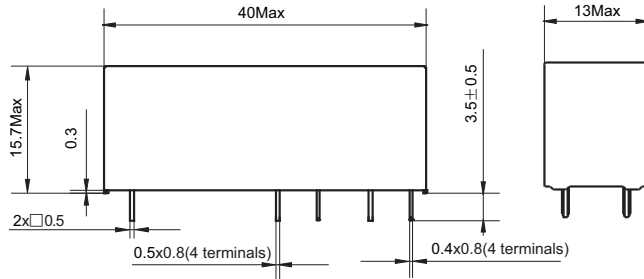

Wiring Diagram  
(Bottom view)

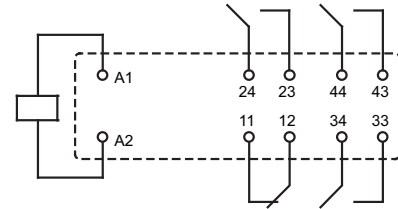


PCB Layout  
(Bottom view)

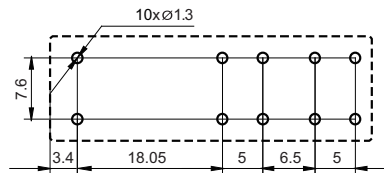


- Remark: 1) The pin dimension of the product outline drawing is the size before tinning (it will become larger after tinning), and the mounting hole size is the recommended design size of the PCB board hole. The specific PCB board hole design size can be mapped and adjusted according to the actual product.
- 2) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .
- 3) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Max.DC load breaking capacity

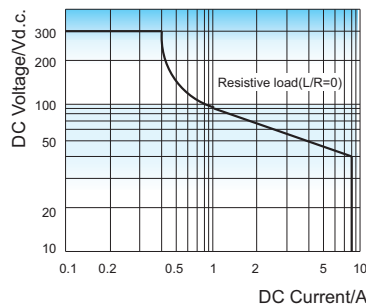


Electrical Endurance

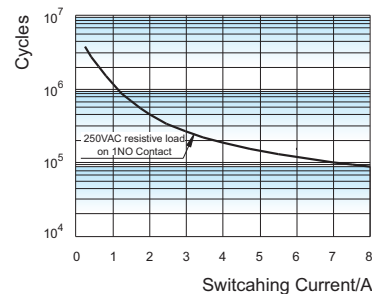

**Test conditions:**

250VAC, Room temp.,  
1s on 9s off.


AC-15 Electrical Endurance

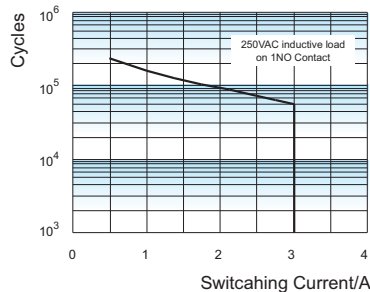

**Note:**

- 1) AC-15 electrical standard test according to IEC 60947-5-1;
- 2) The test condition: 250VAC, 85°C, 1s ON:9s OFF.

DC-13 Electrical Endurance

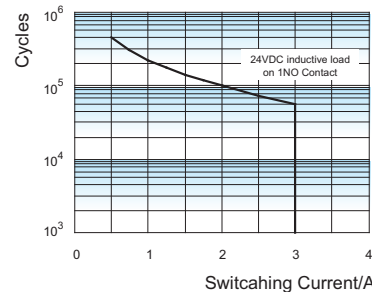

**Note:**

- 1) DC-13 electrical standard test according to IEC 60947-5-1;
- 2) The test condition: 24VDC, 85°C, 1s ON:9s OFF.

### Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.