

HFD32

1GHz ULTRATHIN HIGH-FREQUENCY RELAY



Features

- Excellent high-frequency characteristics
- Supports 50Ω And 75Ω impedance applications
- Up to 10W RF load switching capability
- Low mounting height to save board spacing
- SMT type available

RoHS compliant

CONTACT DATA

Contact arrangement	2C	
Contact resistance	100mΩ max. (at 10mA 30mVDC)	
Contact material	AgPd + Au plated, AgNi + Au plated	
Contact rating	Resistive load	1A 30VDC 2A 30VDC 0.5A 125VAC
	High frequency load	3W 1GHz
Max. switching voltage	125VAC / 30VDC	
Max. switching current	0.5A / 2A	
Max. switching power	62.5VA / 60W / 10W 1GHz	
Min. applicable load ¹⁾	10mV 10μA	
Mechanical endurance	1 x 10 ⁸ Ops	
Electrical endurance	Resistive load	1 x 10 ⁵ Ops (1A 30VDC, 85°C, 1s on 9s off) 1 x 10 ⁵ Ops (0.5A 125VAC, 85°C, 1s on 9s off)
	High frequency load	1 x 10 ⁵ Ops (3W 1GHz, 85°C, 1s on 9s off)

Notes: 1) The data shown above are initial values.

2) Min. applicable load is reference value. Please perform the confirmation test with the actual load before production since reference value may change according to switching frequencies, environmental conditions and expected contact resistance and reliability.

3) Electrical endurance test is conducted with load being connected to NO or NC contacts.

COIL

Coil power	Single side stable	See Table COIL DATA
	1 coil latching	See Table COIL DATA
	2 coils latching	See Table COIL DATA
	Temperature rise	30K max.(1A load, ambient temperature 85°C)

HIGH-FREQUENCY CHARACTERISTICS

frequency	~1GHz	
Isolation	between open contacts	≥20dB
	between contact sets	≥30dB
Insertion loss	≤0.3dB	
V.SWR	≤1.2	
Through maximum power	3W(1GHz,V.SWR≤1.2)	

Notes: 1) The data shown above are initial values.

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between open contacts	750VAC 1min
	Between coil & contacts	1000VAC 1min
	Between contact sets	1000VAC 1min
	Between coil, contact & ground	1000VAC 1min
Operate time (Set time)	3ms max.	
Release time (Reset time)	3ms max.	
Ambient temperature	-40°C to 85°C	
Humidity	5% to 85% RH	
Shock resistance	Functional	735m/s ²
	Destructive	980m/s ²
Vibration resistance	Functional	10Hz ~ 55Hz 3.3mm DA
	Destructive	10Hz ~ 55Hz 5.0mm DA
Termination	SMT	
Unit weight	Approx. 2.2g	
Moisture sensitivity levels (Only for SMT type, JEDEC-STD-020)	MSL-3	
Construction	Plastic sealed	

Notes: 1) The data shown above are initial values.

2) UL insulation system: Class A.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2023 Rev. 1.01

COIL DATA

at 23°C

Single side stable

Coil Code	Nominal Voltage VDC ¹⁾	Initial Pick-up Voltage VDC ¹⁾ max.	Initial Drop-out Voltage VDC min.	Coil Resistance Ω	Nominal Power mW approx.	Max. Voltage VDC ⁴⁾
HFD32/1.5	1.5	1.13	0.15	16 x (1±10%)	140	3.0
HFD32/2.4	2.4	1.8	0.24	41.3 x (1±10%)	140	4.8
HFD32/3	3	2.25	0.3	64.3 x (1±10%)	140	6.0
HFD32/4.5	4.5	3.38	0.45	145 x (1±10%)	140	9.0
HFD32/5	5	3.75	0.5	178 x (1±10%)	140	10
HFD32/6	6	4.5	0.6	257 x (1±10%)	140	12
HFD32/9	9	6.75	0.9	579 x (1±10%)	140	18
HFD32/12	12	9	1.2	1028 x (1±10%)	140	24
HFD32/24	24	18	2.4	2880 x (1±10%)	200	48
HFD32/48	48	36	4.8	7680 x (1±10%)	300	72

1 coil latching

Coil Code	Nominal Voltage VDC ¹⁾	Initial Pick-up Voltage VDC ¹⁾ max.	Initial Drop-out Voltage VDC ¹⁾ min.	Coil Resistance Ω	Nominal Power mW approx.	Max. Voltage VDC ⁴⁾
HFD32/1.5-L1	1.5	1.13	1.13	22.5 x (1±10%)	100	3.0
HFD32/2.4-L1	2.4	1.8	1.8	58 x (1±10%)	100	4.8
HFD32/3-L1	3	2.25	2.25	90 x (1±10%)	100	6.0
HFD32/4.5-L1	4.5	3.38	3.38	203 x (1±10%)	100	9.0
HFD32/5-L1	5	3.75	3.75	250 x (1±10%)	100	10
HFD32/6-L1	6	4.5	4.5	360 x (1±10%)	100	12
HFD32/9-L1	9	6.75	6.75	810 x (1±10%)	100	18
HFD32/12-L1	12	9	9	1440 x (1±10%)	100	24
HFD32/24-L1	24	18	18	3840 x (1±10%)	150	48

2 coils latching

Coil Code	Nominal Voltage VDC ¹⁾	Pick-up Voltage VDC ¹⁾ max.	Drop-out Voltage VDC ¹⁾ min.	Coil Resistance Ω	Nominal Power mW approx.	Max. Voltage VDC ⁴⁾
HFD32/1.5-L2	1.5	1.13	1.13	11.3 x (1±10%)	200	3.0
HFD32/2.4-L2	2.4	1.8	1.8	29 x (1±10%)	200	4.8
HFD32/3-L2	3	2.25	2.25	45 x (1±10%)	200	6.0
HFD32/4.5-L2	4.5	3.38	3.38	101 x (1±10%)	200	9.0
HFD32/5-L2	5	3.75	3.75	125 x (1±10%)	200	10
HFD32/6-L2	6	4.5	4.5	180 x (1±10%)	200	12
HFD32/9-L2	9	6.75	6.75	405 x (1±10%)	200	18
HFD32/12-L2	12	9	9	720 x (1±10%)	200	24
HFD32/24-L2	24	18	18	1920 x (1±10%)	300	48


COIL DATA

at 23°C

Notes:1) The data shown above are initial values.

- 2) To supply rated step voltage to coil is the foundation of relay proper operation. Please make sure the applied voltage to the coil reach at rated values.

Please refer to the typical diagram below for single side stable relay. The "V_coil" is the rated voltage:

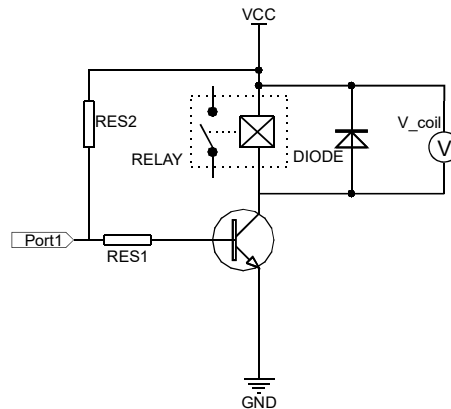

- 3) In case 5V of transistor drive circuit, it is recommended to use 4.5V type relay, and 3V to use 2.4V type relay.
- 4) For monostable relays, if you need to drop down voltage and hold mode after reliably operating, make sure that the effective value of holding voltage is not less than 60% of the rated voltage.
- 5) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.
- 6) When user's requirements can't be found in the above table, special order allowed.
- 7) During the relay pick-up or drop-out processes, there are stages of contact pressure change, contact vibration and unstable contact etc. When the voltage applied to coil is gradually changed, it will lengthen the unstable stage and affect relay endurance. To reduce this influence, please apply step voltage (switching circuit) to relay coil.

ORDERING INFORMATION




	HFD32 /	24	-L1	S	R	(XXX)
Type						
Coil voltage	1.5, 2.4, 3, 4.5, 5, 6, 9, 12, 24, 48VDC					
Sort	L1: 1 coil latching L2: 2 coils latching Nil: Single side stable					
Terminal type	S: Standard SMT					
Packing style	R: Tape and reel packing (Only for SMT type)					
Special code	XXX: Customer special requirement		Nil: Standard			

- Notes:**
- The 48VDC coil voltage specification is only applicable to the monostable specification.
 - R type (tape and reel) packing is moisture-proof which meets requirement of MSL-3. Please choose R type packing for SMT products. For R type, the letter "R" will only be printed on packing tag but not on relay cover. Tube packing is normally not available for SMT products unless specially requested by customer. But please note that tube packing is not moisture-proof so please bake the products before use according to description of Notice 11 herewith. In addition, tube packaging will be adopted when the ordering quantity of R type is equal to or less than 100 pieces unless otherwise specified.
 - The customer special requirement express as special code after evaluating by Hongfa.
 - Please make sure that there are no silicon-based substances (such as silicon rubber, silicone oil, silicon-based coating agents, silicon fillers, etc.) around the relay, because it will generate silicon-containing volatile gas, which may cause poor contact in case of silicon-containing volatile gas sticking on contact. Flux proofed and dust cover type relays are prohibited in environments with water vapor and harmful gases (P, Cl, H₂S, SO₂, NO₂). Plastic sealed relays shall be used with practical test verification.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions




PCB Layout (Bottom view)

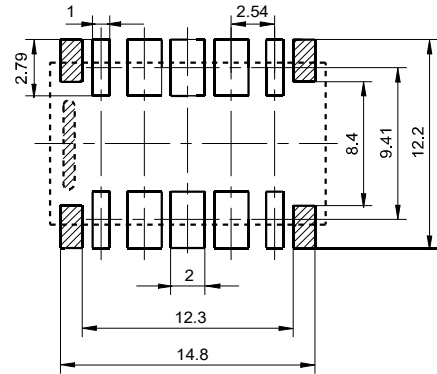

Remark: 1)  represents the ground terminal or ground mounting hole.


Wiring Diagram

Single side stable (Bottom view)

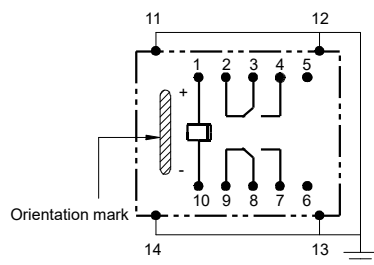


No energized condition

1 coil latching (Bottom view)

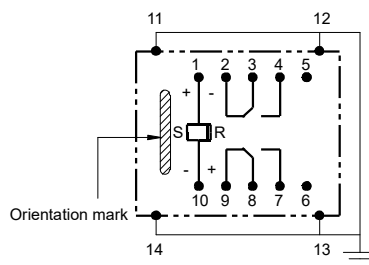

Reset condition

2 coil latching (Bottom view)

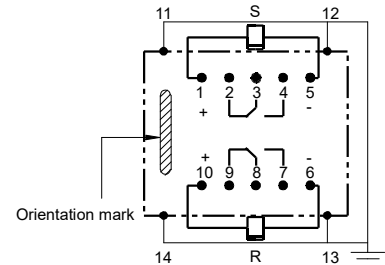


Reset condition

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Pin Layout

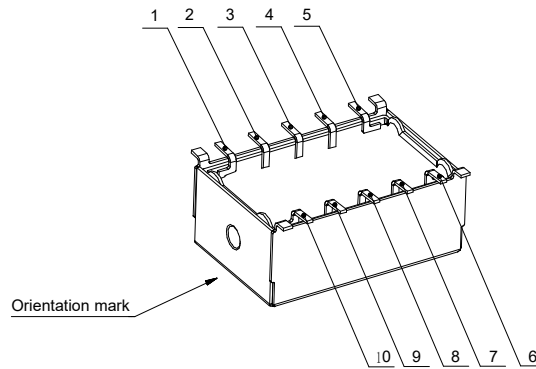


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.
 3) 11~14 is ground terminal.


HIGH FREQUENCY CHARACTERISTICS CURVES

High-Frequency Characteristics/50Ω


Voltage standing wave ratio/V.SWR



Insertion loss




Isolation




High-Frequency Characteristics/75Ω


Voltage standing wave ratio/V.SWR



Insertion loss




Isolation




- Remark: (1) Ambient temperature conditions is 23°C.
 (2) The high-frequency characteristics will vary depending on the PCB board. Please be sure to check performance parameters including durability in actual equipment before use.
 (3) Test model and specification: HFD45/5-SR, test instrument: Keysight E5071C network analyzer.


Direction of Relay Insertion

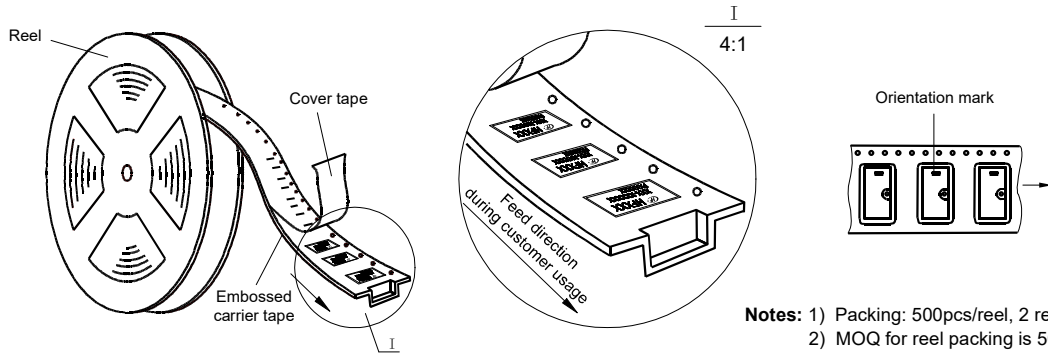


Notes: 1) Packing: 500pcs/reel, 2 reels/carton.
2) MOQ for reel packing is 500pcs.

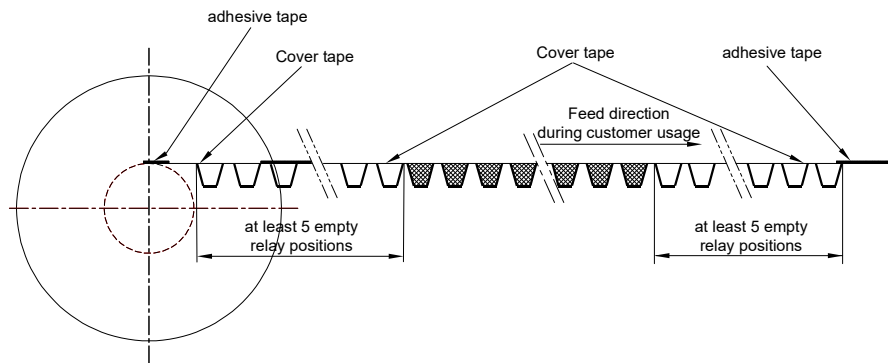

Reel Dimensions

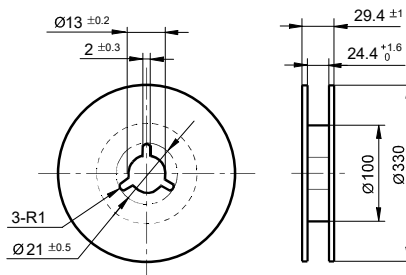


Tape Dimensions

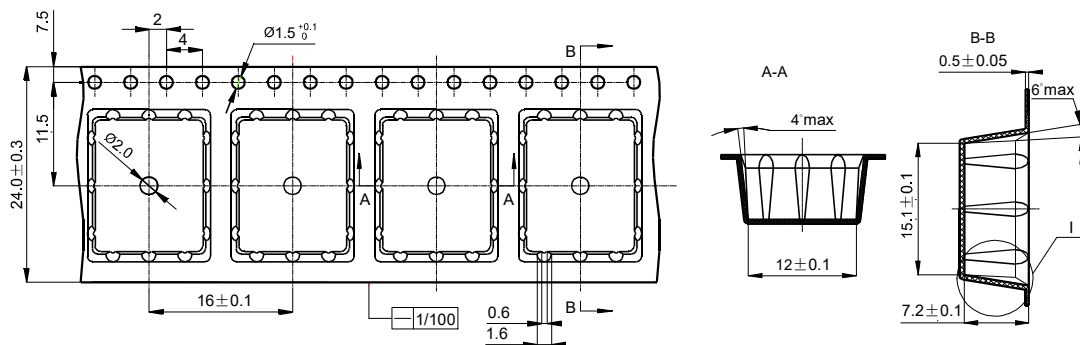


CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER

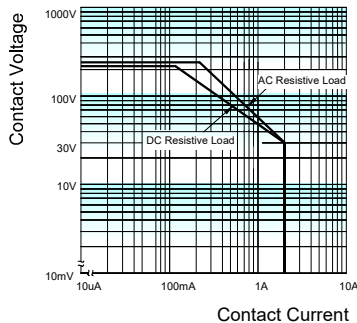

ENDURANCE CURVE



Temperature/Time profile of Reflow Soldering (PCB welding surface)

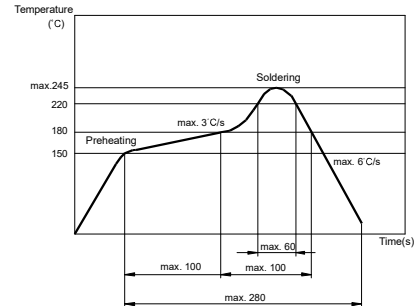

Notice

- 1) This relay is highly sensitive polarized relay, if correct polarity is not applied to the coil terminals, the relay does not operate properly.
- 2) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.
- 3) Relay is on the "reset" status when being released from stock, with the consideration of shock risen from transit and relay mounting, it should be changed to the "set" status when application(connecting to the power supply). Please reset the relay to "set" or "reset" status on request.
- 4) Energizing coil with rated voltage is basic for normal operation of a relay, please make sure the energized voltage to relay coil have reached therated voltage. Regarding latching relay, in order to maintain the "set" or "reset" status, impulse width of the rated voltage applied to coil should be more than 5 times of "set" or "reset" time.
- 5) For a monosteady state relay, after the relay is reliably operated, if it needs to be kept under pressure, make sure that the effective value of the voltage is not less than 60 % of the rated voltage;
- 6) For 2 coil latching relay,do not emergize voltage to "set" coil and "reset" coil simultaneously.
- 7) The relay may be damaged because of falling or when shocking conditions exceed the requirement.
- 8) For SMT products, validation with real application should be done before your series production, if the reflow-soldering temperature curve is out of our recommendation. Generally, two-time reflow-soldering is not recommended for the relay. However, if two-time reflow-soldering is required, a 60-min. interval should be guaranteed and a validation should be done before production.
- 9) Please use wave soldering or manual soldering for straight-in relay. If you need reflow welding, please confirm the feasibility with us.
- 10) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
- 11) Regarding the plastic sealed relay, we should leave it cooling naturally untill below 40°C after welding, then clean it and deal with coating, remarkably the temperature of solvents should also be controlled below 40°C.Please avoid cleaning the relay by ultrasonic, avoid using the solvents like gasoline, Freon, and so on, which would affect the configuration of relay or influence the environment.
- 12) Relays packaged in moisture barrier bags meet MSL-3 requirements. The relays should be stored at ambient conditions of $\leq 30^{\circ}\text{C}$ and $\leq 60\%$ RH after they are removed from their packaging, and should be used within 168 hours. If the relays cannot be used within 168 hours, please repack them or store them in a drying oven at $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, $\leq 10\%$ RH. Otherwise, relays may be subjected to a soldering test to check their performance, or they may be used after keeping them in an oven for 72 hours at with $50^{\circ}\text{C} \pm 5^{\circ}\text{C}$, $\leq 30\%$ RH.
- 13) When applied with continuous current, the heat from relay coil will age its isolation. Thus, please do not ground connected the coil to reduce electrical errosion if possible. And please provide protection circuit to avoid broken wire and losses.
- 14) Please make sure that there are no silicon-based substances (such as silicon rubber, silicone oil, silicon-based coating agents, silicon fillers, etc.) around the relay, because it will generate silicon-containing volatile gas, which may cause poor contact in case of silicon-containing volatile gas sticking on contact.Flux proofed and dust cover type relays are prohibited in environments with water vapor and harmful gases (P, Cl, H₂S, SO₂, NO₂). Plastic sealed relays shall be used with practical test verification.
- 15) About preferable condition of operation, storage and transportation, please refer to "Explanation to terminology and guidetines of relay".
- 16) During the relay pick-up or drop-out processes, there are stages of contact pressure change, contact vibration and unstable contact etc. When the voltage applied to coil is gradually changed, it will lengthen the unstable stage and affect relay endurance. To reduce this influence, please apply step voltage(switching circuit) to relay coil.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.