

HFE39

MINIATURE HIGH POWER LATCHING RELAY




File No.:E134517



File No.:40049970



File No.: CQC20002257171



Features

- Latching relay
- 20A switching capacity
- Inrush current capacity up to 350A for 2ms

RoHS compliant

CONTACT DATA

Contact arrangement	2A, 2B, 1A+1B	
Contact resistance 1)	20mΩ max. (at 1A 24VDC)	
Contact material	AgSnO ₂	
Contact rating	2A	16A 250VAC, 1 x 10 ⁵ ops (Resistance) 20A 250VAC, 1 x 10 ⁵ ops (Resistance) ²⁾ 1.5HP 250VAC 5 x 10 ⁴ ops (Motor)
	2B	10A 277VAC 2 x 10 ⁴ ops (Electronic ballast) 10A 277VAC, 3 x 10 ⁴ ops (Standard ballast) 10A 240VAC, 2.5 x 10 ⁴ ops (TV-10)
	1A+1B	16A 250VAC, 5 x 10 ⁴ ops (Resistance)
Max. switching voltage	277VAC	
Max. switching current	20A	
Max. switching power	5000VA	
Mechanical endurance	1 x 10 ⁶ ops	
Electrical endurance	See "contact rating"	

Notes: 1) The data shown above are initial values.

2) A special suffix (530) will be required to follow at the end of relay partnumber,when the electrical life requirement up to 1 x 10⁵ cycles at 20A 250VAC resistive load.

COIL

Rated power	Standard: Single coil latching: Approx 1W Double coils latching: Approx 2W	
	Sensitive: Single coil latching: Approx 0.6W Double coils latching: Approx 1.2W	

SAFETY APPROVAL RATINGS

UL/CUL	2A, 2B	20A 250VAC Resistance at 85°C 1.5HP 250VAC Motor at 40°C
	(Only for standard type)	277VAC 10A Standard ballast at 40°C 277VAC 10A Electronic ballast at 40°C 240VAC 10A TV-10 at 40°C
VDE	2A, 1A+1B	16A 250VAC Resistance at 85°C 20A 250VAC Resistance

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

CHARACTERISTICS

Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	4000VAC 1min
	Between open contacts	1000VAC 1min
Creepage distance		8mm min.
Set time (at nomi. volt.)		15ms max.
Reset time (at nomi. volt.)		15ms max.
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance		10Hz to 55Hz 1.5mm DA
Humidity		5% to 85% RH
Ambient temperature		-40°C to 85°C
Termination		PCB
Unit weight		Approx.12g
Construction		Plastic sealed, Flux proofed

Notes: The data shown above are initial values.

COIL DATA

at 23°C

Standard type:

Nominal Voltage VDC	Set / Reset Voltage VDC 1)2) max.	Pulse Duration ms min.	Coil Resistance x (1±10%) Ω	
3	2.1	50	Single coil latching	9
5	3.5	50		25
6	4.2	50		36
9	6.3	50		81
12	8.4	50		144
24	16.8	50		576
48	33.6	50		2304
3	2.1	50	Double coils latching	4.5+4.5
5	3.5	50		12.5+12.5
6	4.2	50		18+18
9	6.3	50		40.5+40.5
12	8.4	50		72+72
24	16.8	50		288+288
48	33.6	50		1152+1152



HONGFA RELAY

ISO9001、IATF16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2021 Rev.1.00

COIL DATA

at 23°C

Sensitive type:

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾²⁾ max.	Pulse Duration ms min.	Coil Resistance x (1±10%) Ω	
3	2.1	50	Single coil latching	15
5	3.5	50		42
6	4.2	50		60
9	6.3	50		135
12	8.4	50		240
24	16.8	50		960
3	2.1	50	Double coils latching	7.5+7.5
5	3.5	50		21+21
6	4.2	50		30+30
9	6.3	50		67.5+67.5
12	8.4	50		120+120
24	16.8	50		480+480

Notes:1) The data shown above are initial values;The above set voltage, reset voltage are the test value for relay without load. Please use 1~1.5 times of rated voltage to drive the relay for your application.

ORDERING INFORMATION

	HFE39	-1	/12	-2D	S	L	T	-L1	-R	(XXX)
Type										
Version	1: With manual switch Nil: Without manual switch									
Coil voltage	3, 5, 6, 9, 12, 24VDC 48 VDC(Only for standard type)									
Contact arrangement ¹⁾	1HD: 1 Form A + 1 Form B 2D: 2 Form B 2H: 2 Form A									
Construction ²⁾	S: Plastic sealed(Not applicable for HFE39-1) Nil: Flux proofed									
Coil power	L: Sensitive Nil: Standard									
Contact material	T: AgSnO ₂									
Coil type	L1: Single coil latching L2: Double coils latching									
Polarity	R: Reverse polarity Nil: Standard polarity									
Special code ³⁾	XXX: Customer special requirement									

Notes: 1) 2H means that relay is on the "reset" status when delivery; 2D means that relay is on the "set" status when delivery. If no special required by customer, we will keep the relay on the "set" status when delivery.


2) If water cleaning or surface treatment is required after assembling relay on print circuit board, please contact us to confirm the suitable soldering conditions and specifications.

3) Customer's special technical requirements to be evaluated by Hongfa, and differentiated by the special code suffix. For example, suffix (170) is for flash light load; (530) is for electrical life requirement up to 1×10^5 cycles at 20A 250VAC resistive load.


OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm

Outline Dimensions

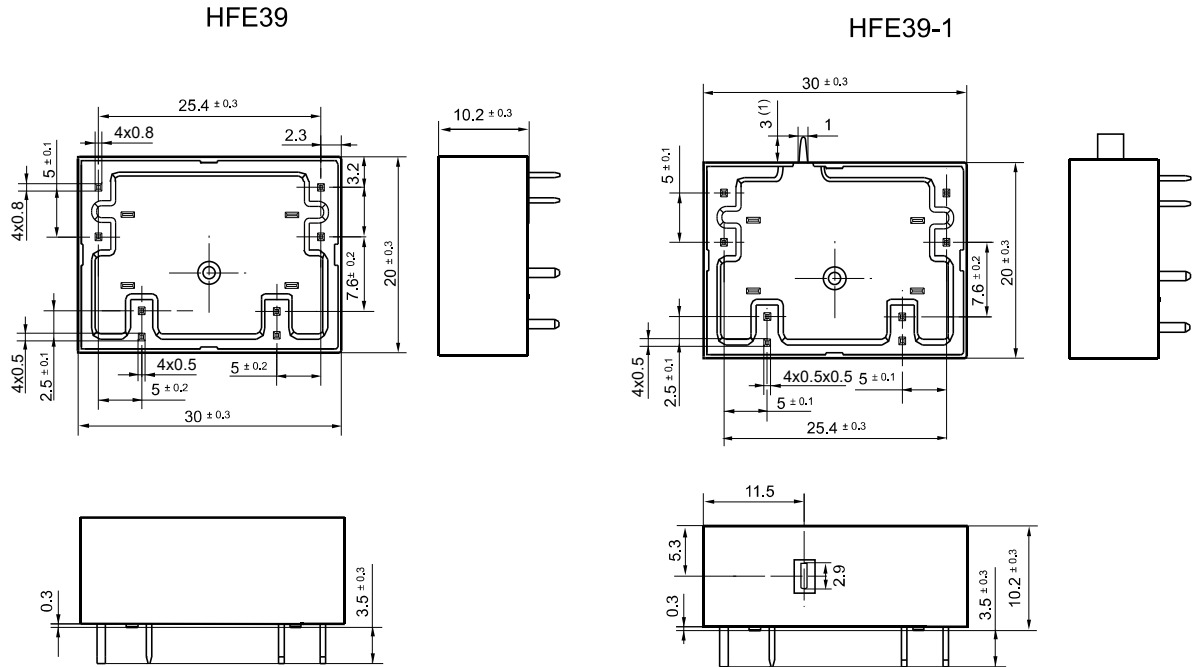

PCB Layout (Bottom view)

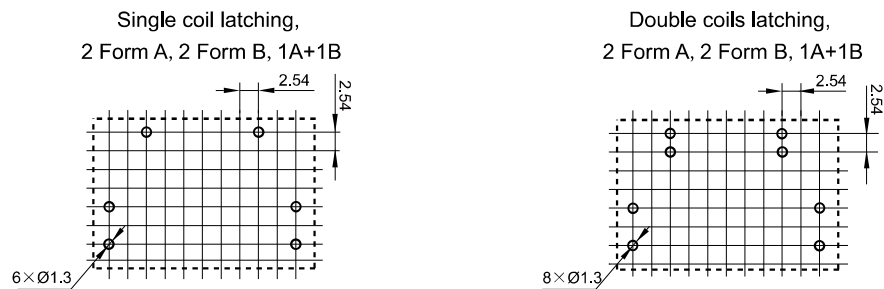

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.
2) The dimension is for reference only. Please contact us to determine the suitable dimension if any special requirement.

Wiring Diagram (Bottom view)





2 Form A

Positive polarity

Single coil latching



Double coils latching

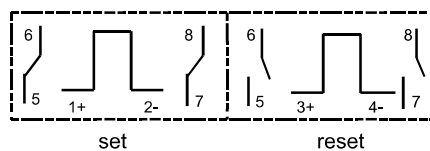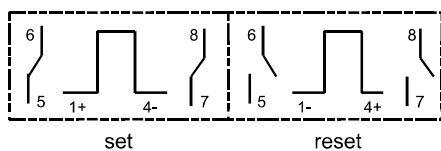

Reverse polarity

Single coil latching

Double coils latching

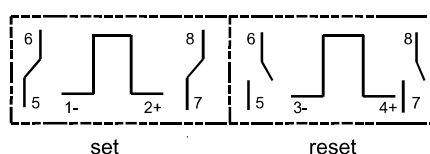
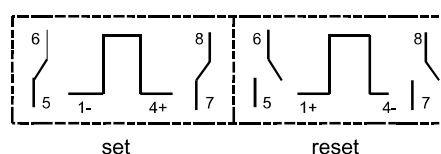


2 Form B

Positive polarity



Single coil latching

Double coils latching

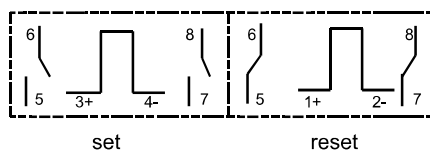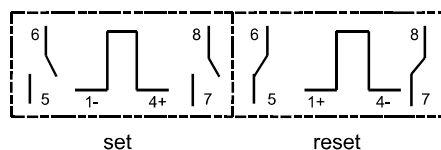

Single coil latching

Double coils latching

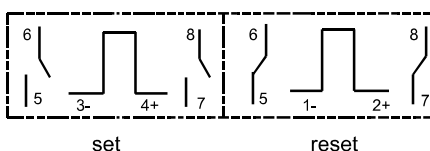
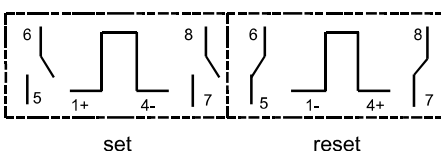


1 Form A + 1 Form B

Positive polarity

Single coil latching



Double coils latching

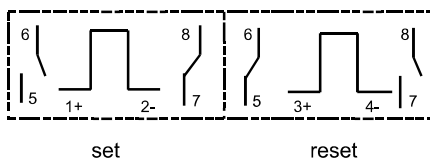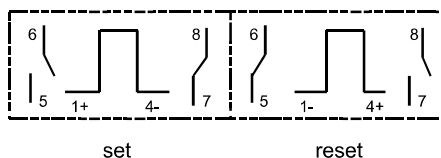

Reverse polarity

Single coil latching


Double coils latching

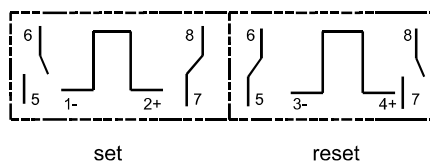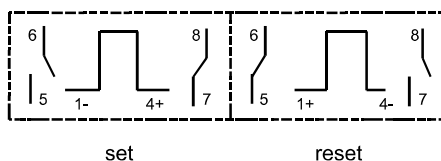

CAUTIONS

1. The recommended soldering temperature range is $250\pm 10^{\circ}\text{C}$ with the duration of 2~5s. It is not suggested to apply reflow soldering method, if it is required indeed, please contact with our technicians. It is general required that the wave soldering temperature at 250°C shall not more than 2s.
2. Latching relay is on the "reset" or "set" status when delivery, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
3. In order to maintain "set" or "reset" status, energized voltage applied across the coil should reach the rated voltage, impulse width should be 5 times more than "set" or "reset" time. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
4. Because of the dust proof structure, the recommended storage time shall not longer than 6 months, Please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Wave soldering temperature distribution chart

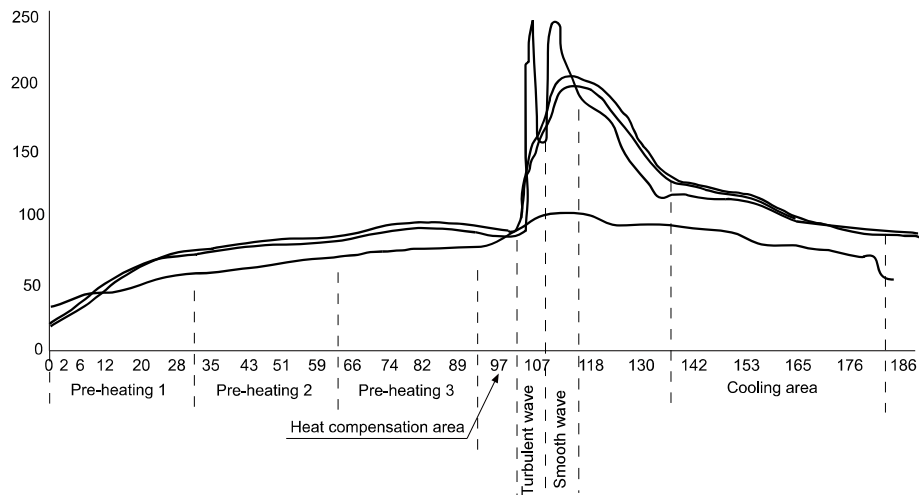

Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.