


# HFE70

# SUBMINIATURE INTERMEDIATE POWER RELAY



## Features

- High switching capacity  
1A, 1B: 8A 250VAC
- 4kV dielectric strength (between coil & contacts)
- 2 Form A and 1A + 1B contact arrangement available
- Monostable and bistable types available

RoHS compliant

## CONTACT DATA

Contact arrangement	2A, 1A + 1B
Contact resistance <sup>1)</sup>	<sup>2)</sup> gold-plated: ≤30mΩ(1A 6VDC) Non gold-plated: ≤50mΩ(1A 6VDC)
Contact material	AgSnO <sub>2</sub>
Contact rating(res. load)	8A 250VAC(COSΦ=1.0), 1×10 <sup>5</sup> ops 5A 30VDC(τ=0ms), 2×10 <sup>4</sup> ops 0.3A 240VDC(τ=0ms), 1×10 <sup>4</sup> ops 0.15A 240VDC(τ=40ms), 1×10 <sup>4</sup> ops
Max. switching voltage	380VAC, 30VDC
Max. switching current	8A
Max. switching power	2000W
Mechanical endurance	1 x 10 <sup>7</sup> ops(0.1s on, 0.1s off)
Electrical endurance	See "contact rating"

Notes: 1) The data shown above are initial values.

2) Typical value: Sampling quantity for contact resistance shall not less than 20 pcs, take the average value from 5 continuous measurements for each sample.

## CHARACTERISTICS

Insulation resistance	1000MΩ(500VDC)	
Dielectric strength	Between coil & contacts	3750VAC 1min
	Between contact sets	2000VAC 1min
	Between open contacts	1200VAC 1min
Impulse voltage(between coil and contacts)	6kV(1.2/50μs)	
Set time/Operate time	≤15ms	
Reset time/Release time	≤10ms	
Shock resistance	Functional	196m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance	Functional	10Hz~55Hz 2mm DA
	Destructive	10Hz~55Hz 3mm DA
Humidity	5% ~ 85% RH	
Ambient temperature	-40°C ~ 85°C	
Termination	Coil terminal	PCB
	Load terminal	PCB
Unit weight	Approx. 10g	
Construction	Plastic sealed, Flux proofed	

Notes: The data shown above are initial values.

## COIL

Rated power	Monostable	Approx. 0.24W
	Double coils latching	Approx. 0.24W

## COIL DATA

23°C

### Monostable

Nominal Voltage VDC	Pick-up Voltage VDC <sup>1)2)</sup>	Drop-out Voltage <sup>1)</sup> VDC	Coil Resistance x (1±10%) Ω
1.5	≤1.2	≥0.15	9.375
3	≤2.1	≥0.3	38
5	≤3.5	≥0.5	105
6	≤4.2	≥0.6	150
9	≤6.3	≥0.9	360
12	≤8.4	≥1.2	600
24	≤16.8	≥2.4	2400
48	≤33.6	≥4.8	9000

### Double coils latching

Nominal Voltage VDC	Set / Reset Voltage <sup>1)2)</sup> VDC	Pulse Duration ms	Coil Resistance x (1±10%) Ω
1.5	≤1.2	≥50	9.375+9.375
3	≤2.1	≥50	38+38
5	≤3.5	≥50	105+105
6	≤4.2	≥50	150+150
9	≤6.3	≥50	360+360
12	≤8.4	≥50	600+600
24	≤16.8	≥50	2400+2400
48	≤33.6	≥50	9000+9000

Notes: 1) The data shown above are initial values.

2) Above driving voltage only apply to check relay normal function without load. When normal use with load, use (1~2)U<sub>e</sub> for latching relay set/reset voltage, use (1~1.3)U<sub>e</sub> for set voltage and 0V for release voltage for monostable relay.



HONGFA RELAY

ISO9001、IATF16949、ISO14001、ISO45001、IECQ QC 080000、ISO/EC 27001

2025 Rev.1.00

## ORDERING INFORMATION


	<b>HFE70</b>	<b>/24</b>	<b>-2H</b>	<b>S</b>	<b>T</b>	<b>G</b>	<b>-L2</b>	<b>-R</b>	<b>(XXX)</b>
<b>Type</b>									
<b>Coil voltage</b>	3,5,6,9,12,24,48 VDC								
<b>Contact arrangement</b> <sup>1)</sup>	<b>1HD:</b> 1A + 1B <b>2H:</b> 2 Form A								
<b>Construction</b> <sup>2)</sup>	<b>S:</b> Plastic sealed <b>Nil:</b> Flux proofed								
<b>Contact material</b> <sup>3)</sup>	<b>T:</b> AgSnO <sub>2</sub>								
<b>Contact plating</b>	<b>G:</b> Gold plated <b>Nil:</b> Non gold plated								
<b>Coil type</b>	<b>L2:</b> Double coils latching <b>Nil:</b> Monostable								
<b>Polarity</b>	<b>R:</b> Reverse polarity <b>Nil:</b> Standard polarity								
<b>Special code</b> <sup>4)5)</sup>	<b>XXX:</b> Customer special requirement								

- Notes: 1) 2H means that relay is on the "reset" status when delivery; 1HD means that the terminal of 7 and 8 are open with terminal 5 and 6 closed.  
 2) Under the environment with harmful gas like H<sub>2</sub>S, SO<sub>2</sub> or NO<sub>2</sub>, plastic sealed type is recommended. Please confirm in actual application. If the water cleaning is not required, flux proofed type is preferentially recommended. If water cleaning or surface treatment is required after assembling relay on print circuit board, please contact us to confirm the suitable soldering conditions and specifications.  
 3) For the application with inrush current conditions, such as lamp load, motor load, capacitive load, coil load, etc., flux proofed type with non gold plated AgSnO<sub>2</sub> contact is recommended.  
 4) Please make confirmation with our engineers before selection if any inconformity between application conditions and our specifications.  
 5) The customer special requirement express as special code after evaluating by Hongfa.

## OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm

### Outline Dimensions

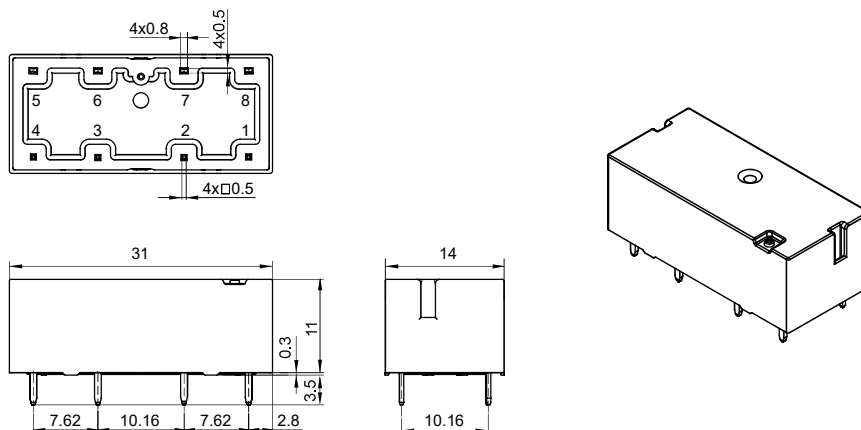


**Remark:** 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.

# OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm


## PCB Layout

(Bottom view)

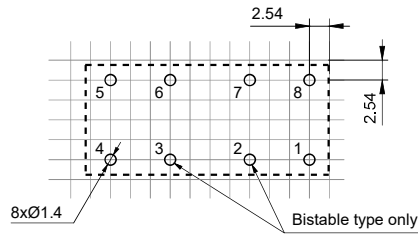

## Wiring Diagram


(Bottom view)

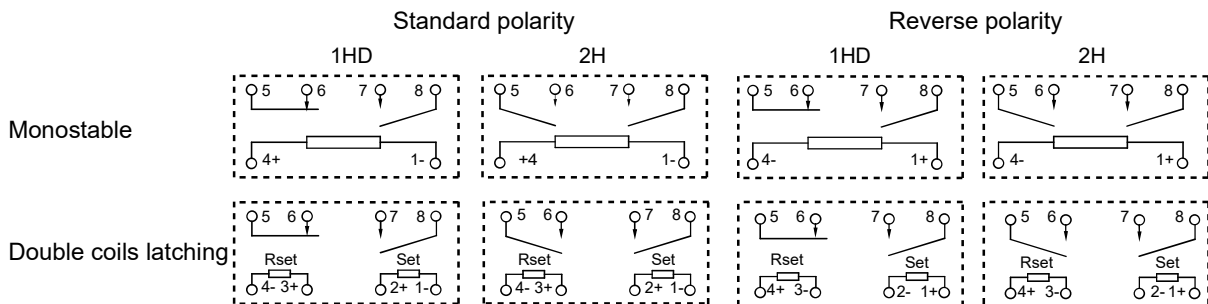

## CAUTIONS

- Latching relay is on the "reset" or "set" status when delivery, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application ( connecting the power supply), please reset the relay to "set" or "reset" status on request.
- In order to maintain "set" or "reset" status, energized voltage applied across the coil should reach the rated voltage, impulse width should be 5 times more than "set" or "reset" time. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
- The recommended soldering temperature range is  $250 \pm 10^\circ\text{C}$  with the duration of 2~5s for PCB termination. It is not suggested to apply reflow soldering method, if it is required indeed, please contact with our technicians. It is general required that the wave soldering temperature at  $250^\circ\text{C}$  shall not more than 2s.the below chart is the wave soldering temperature distribution chart we recommended for your reference.
- Keep the product away from strong magnetic field during transportation, storage and application, to avoid change of set/reset voltage.

Wave soldering temperature distribution chart

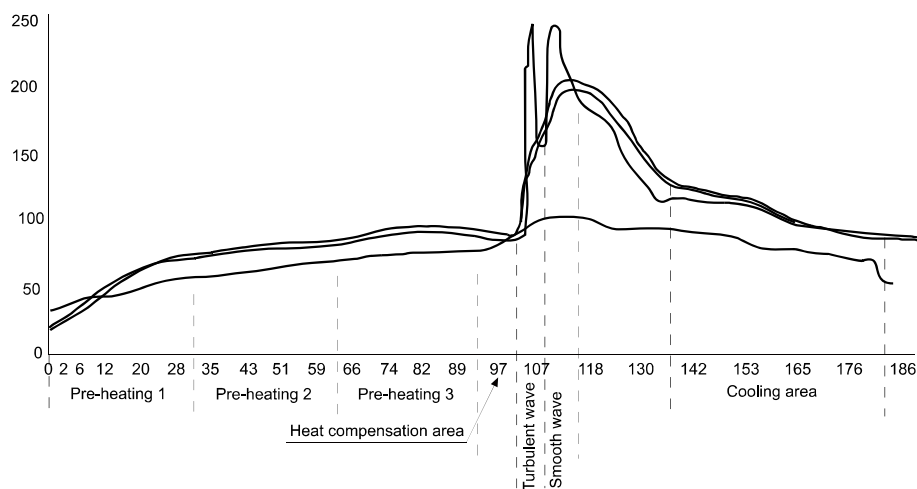

### Disclaimer

The specification is for reference only. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

©Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.