

HFE51

SUBMINIATURE INTERMEDIATE POWER RELAY



Features

- 150A Latching relay
- Electrical endurance 10000ops
- According to IEC62052-31:UC3
- Contact resistance $\leq 0.35\text{m}\Omega$

RoHS compliant

CONTACT DATA

Contact arrangement	1A(Dual contact), 1B(Dual contact)
Contact resistance ¹⁾	Typical value: ²⁾ $\leq 0.35\text{m}\Omega(150\text{A})$
Contact material	AgSnO ₂
Contact rating	See "electrical endurance"
Max. switching voltage	250VAC
Max. switching current	150A
Max. switching power	37500VA
Mechanical endurance	1x10 ⁵ ops

Notes:1) The data shown above are initial values.

2) Typical value: Sampling quantity for contact resistance shall not less than 20 pcs, take the average value from 5 continuous measurements for each sample.

CHARACTERISTICS

Insulation resistance		1000MΩ(500VDC)
Dielectric Strength	Between coil and contact	4000VAC (1min)
	Between open contacts	2000VAC (50/60H 1min)
Electrical distance		8.4mm
Set time (at nomi. volt.)		20ms max.
Reset time (at nomi. volt.)		20ms max.
Shock Resistance	Functional	196m/s ²
	Destructive	980m/s ²
Vibration resistance		10Hz to 55Hz 1.5mm DA
Humidity		5% to 85% RH
Ambient temperature		-40°C to 85°C
Termination	Coil termination	PCB&QC
	Load termination	QC
Unit weight		Approx. 110g
Construction		Dust protected

Notes: The data shown above are initial values.

COIL

Rated power	Single coils: Approx. 3W Double coils: Approx. 6W
-------------	--

COIL DATA

at 23°C

Single coil latching

Nominal Voltage VDC	Set / Reset Voltage ¹⁾²⁾ VDC	Pulse Duration (Recommended) ms	Coil Resistance x (1 \pm 10%) Ω
6	≤ 4.8	50~100	12
9	≤ 7.2	50~100	27
12	≤ 9.6	50~100	48
24	≤ 19.2	50~100	192
48	≤ 38.4	50~100	768

Double coils latching

Nominal Voltage VDC	Set / Reset Voltage ¹⁾²⁾ VDC	Pulse Duration (Recommended) ms	Coil Resistance x (1 \pm 10%) Ω
6	≤ 4.8	50~100	6+6
9	≤ 7.2	50~100	13.5+13.5
12	≤ 9.6	50~100	24+24
24	≤ 19.2	50~100	96+96
48	≤ 38.4	50~100	384+384

Notes:1) The data shown above are initial values.

2) The above values are used as incoming inspection standards, and the recommended driving voltage is 1~1.5 times of the rated voltage.

ELECTRICAL ENDURANCE

Voltage (Uc)	Current (Ic)	Power Factor	Close Open time (s)	Electrical endurance (OPS)
250VAC	120A	COS ϕ =1	7.5:7.5	5500
220VAC	120A	COS ϕ =1	10:20	5000
		COS ϕ =0.5		5000

Notes:1) Electrical endurance meet IEC62052-31 test requirement, do the inductive load test after the resistive load test.

2) The coil is driven at rated voltage.



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2022 Rev. 1.00

ORDERING INFORMATION


Type	HFE51	12	-SH	T	1	R	(XXX)
Coil voltage	6, 9, 12, 24, 48VDC						
Contact arrangement ¹⁾	SH: 1 Form A (Dual contact) SD: 1 Form B (Dual contact)						
Contact material	T: AgSnO ₂						
Coil type	1: Single coil latching 2: Double coils latching						
Polarity	R: Reverse polarity Nil: Standard polarity						
Special code	XXX: Customer special requirement						

Notes: 1) SH means that relay is on the "reset" status when delivery; SD means that relay is on the "set" status when delivery. If no special required by customer, we will keep the relay on the "set" status when delivery.

OUTLINE DIMENSIONS AND WIRING DIAGRAM


Unit: mm

Outline Dimensions

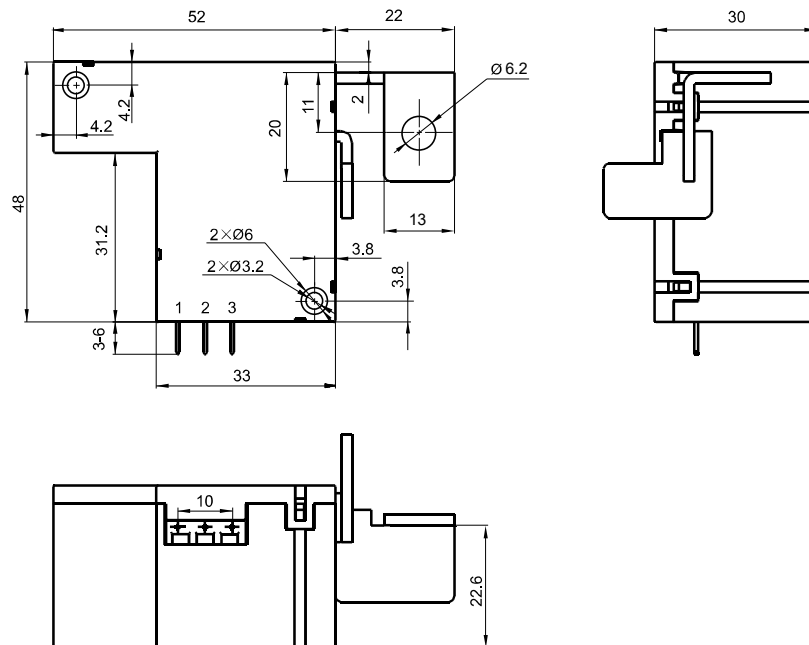

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.

Wiring Diagram

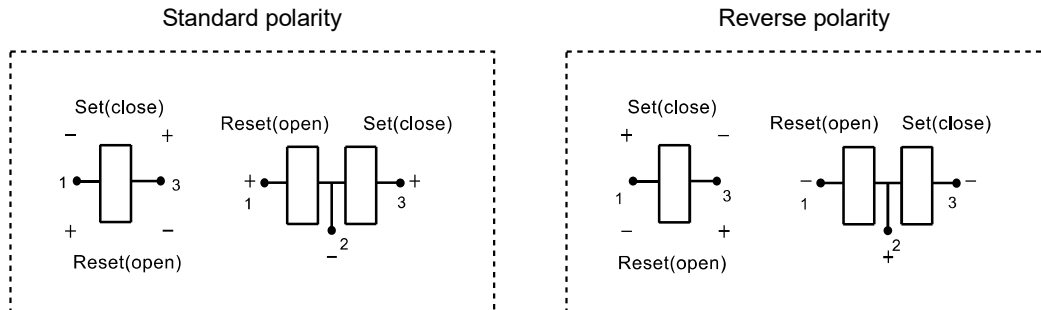

CAUTIONS

1. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
2. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
3. Normally the load terminals are not suitable for reflow solder, wave solder or tin solder, we suggest use spot welding. Load terminals shall be prevented from assembly stress, or freely move.
4. Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements. No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.