


HFE50

MINIATURE HIGH POWER LATCHING RELAY



Features

- 100A Latching relay
- Electrical endurance 10000ops
- According to IEC62052-31:UC2
- Contact resistance $\leq 0.5m\Omega$

RoHS compliant

CONTACT DATA

Contact arrangement	1A,1B
Contact resistance ¹⁾	Typical value: ²⁾ $\leq 0.5m\Omega(100A)$
Contact material	AgSnO ₂
Contact rating	See "electrical endurance"
Max. switching voltage	276VAC
Max. switching current	100A
Max. switching power	27600W
Mechanical endurance	Meter: 1×10^5 ops

Notes: 1) The data shown above are initial values.

2) Typical value: Sampling quantity for contact resistance shall not less than 20 pcs, take the average value from 5 continuous measurements for each sample.

CHARACTERISTICS

Insulation resistance		1000MΩ(500VDC)
Dielectric strength	Between coil & contacts	4000VAC 1min
	Between open contacts	2000VAC 1min
Creepage distance		8mm
Set time (at nomi. volt.)		20ms max.
Reset time (at nomi. volt.)		20ms max.
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance		10Hz to 55Hz 1.5mm DA
Humidity		5% to 85% RH
Ambient temperature		-40°C to 85°C
Termination	Coil termination	PCB&QC
	Load termination	QC
Unit weight		Approx. 65g
Construction		Dust protected

Notes: The data shown above are initial values.

COIL

Rated power	Single coil latching: Approx. 2.4W Double coils latching: Approx. 4.8W
-------------	---

COIL DATA

at 23°C

Single coil latching

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾²⁾ max.	Pulse Duration (Recommended) ms.	Coil Resistance $\times (1 \pm 10\%) \Omega$
6	≤ 4.2	50~100	15
9	≤ 6.3	50~100	34
12	≤ 8.4	50~100	60
24	≤ 16.8	50~100	240
48	≤ 33.6	50~100	960

Double coils latching

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾²⁾ max.	Pulse Duration (Recommended) ms.	Coil Resistance $\times (1 \pm 10\%) \Omega$
6	≤ 4.2	50~100	7.5+7.5
9	≤ 6.3	50~100	17+17
12	≤ 8.4	50~100	30+30
24	≤ 16.8	50~100	120+120
48	≤ 33.6	50~100	480+480

Notes: 1) The data shown above are initial values.

2) The above values are used as incoming inspection standards, and the recommended driving voltage is 1~1.5 times of the rated voltage.



HONGFA RELAY

ISO9001、IATF16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2021 Rev.1.00

ELECTRICAL ENDURANCE

UC Class	Voltage (Uc)	Current (Ic)	Power factor	Close Open time (s)	Electrical endurance (OPS)		Short circuit current (10ms)
416 (UC2)	230VAC	80A	COSØ=1	10:20	5000	Total:10000	Making: 2500A Carrying: 2500A Carrying: 4500A
		80A	COSØ=0.5		5000		

Notes: 1) Electrical endurance meet IEC62052-31 test requirement, do the inductive load test after the resistive load test.
2) The coil is driven at rated voltage.

ORDERING INFORMATION

	HFE50	-100/	12	D	T	4	1	-R	(XXX)
Type									
Contact rating	100: 100A								
Coil voltage	6, 9, 12, 24, 48VDC								
Contact arrangement ¹⁾	D: 1 Form B H: 1 Form A								
Contact material	T: AgSnO ₂								
Coil angle form	2: Distance 5mm; No bowleg 4: Distance 5mm; L-bowleg								
Coil type	1: Single coil latching 2: Double coils latching								
Polarity	R: Reverse polarity Nil: Standard polarity								
Special code ^{2) 4)}	XXX: Customer special requirement								


Notes: 1) H means that relay is on the "reset" status when delivery; D means that relay is on the "set" status when delivery. If no special requirement by customer, we will keep the relay on the "set" status when delivery.

2) UC2: Meet the UC2 requirements on IEC62052-31.

3) We can make special design according to customer's requirement, Please see the typical design.

4) The customer special requirement express as special code after evaluating by Hongfa. e.g. (416) stands for UC2.


Outline Dimensions

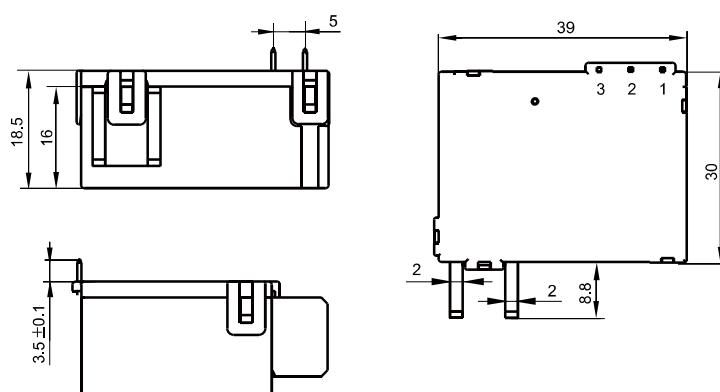


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.

Wiring Diagram

Standard polarity

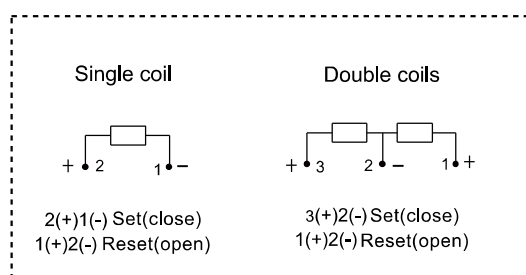

Reverse polarity

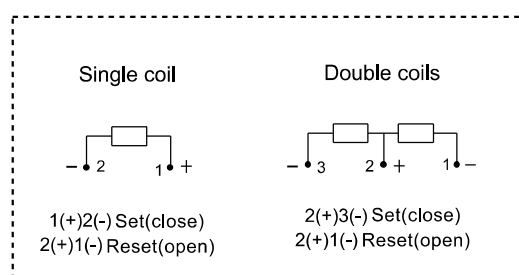

CAUTIONS

- Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock arisen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
- Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
- Normally the load terminals are not suitable for reflow solder, wave solder or tin solder, we suggest use spot welding. Load terminals shall be prevented from assembly stress, or freely move.
- Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements. No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.