

HFE25

HIGH POWER LATCHING RELAY



Features

- 200A Latching relay
- Electrical endurance 6000ops
- According to ANSI C 12.1
(Carrying: 12kA r.m.s / 66.7ms;
7kA peak current/100ms)
- Contact resistance $\leq 0.25m\Omega$

RoHS compliant

CONTACT DATA

Contact arrangement	2A, 2B
Contact resistance ¹⁾	Typical value: ²⁾ $\leq 0.25m\Omega$ (200A)
Contact material	AgSnO ₂
Contact rating	See "electrical endurance"
Max. switching voltage	276VAC
Max. switching current	200A
Max. switching power	55200VA
Mechanical endurance	1 x 10 ⁵ ops
Electrical endurance	200A 240VAC:6 x 10 ³ ops

Notes:1) The data shown above are initial values.

2) Typical value: Sampling quantity for contact resistance shall not less than 20 pcs, take the average value from 5 continous measurements for each sample.

COIL

Rated power	Single coil latching: Approx. 12W Double coils latching: Approx. 24W
-------------	---

COIL DATA

23°C

Single coil latching

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾²⁾	Pulse Duration (Recommended) ms	Coil Resistance x (1±10%) Ω
6	≤ 4.8	50~100	3
9	≤ 7.2	50~100	6.75
12	≤ 9.6	50~100	12
24	≤ 19.2	50~100	48
48	≤ 38.4	50~100	190

Double coils latching

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾²⁾	Pulse Duration (Recommended) ms	Coil Resistance x (1±10%) Ω
6	≤ 4.8	50~100	1.5+1.5
9	≤ 7.2	50~100	3.3+3.3
12	≤ 9.6	50~100	6+6
24	≤ 19.2	50~100	24+24
48	≤ 38.4	50~100	95+95

Notes:1) The data shown above are initial values.

2) The above values are used as incoming inspection standards, and the recommended driving voltage is 1~1.5 times of the rated voltage.

CHARACTERISTICS

Insulation resistance		1000mΩ (500VDC)
Dielectric strength	Between coil and contact	4000VAC 1min
	Between open contacts	2000VAC 1min
Creepage distance		9.6mm
Set time (at nomi. volt.)		≤20ms
Reset time (at nomi. volt.)		≤20ms
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance		10Hz ~ 55Hz 1.5mm DA
Humidity		5% ~ 85% RH
Ambient temperature		-40°C ~ 85°C
Termination	Coil termination	PCB&QC
	Load termination	QC
Unit weight		Approx.400g
Construction		Dust protected

Notes: The data shown above are initial values.



HONGFA RELAY

ISO9001、IATF16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2021 Rev.1.00

ORDERING INFORMATION


Type	HFE25	-B	/12	-2D	T	2	-R (XXX)
Version	B: Type B contact terminal						
Coil voltage	6, 9, 12, 24, 48VDC						
Contact arrangement	1) 2D: 2 Form B 2H: 2 Form A						
Contact material	T: AgSnO ₂						
Coil type	1: Single coil latching 2: Double coils latching						
Polarity	R: Negative polarity Nil: Positive polarity						
Special code	2) XXX: Customer special requirement						

Notes: 1) 2H means that relay is on the "reset" status when delivery; 2D means that relay is on the "set" status when delivery.
If no special required by customer, we will keep the relay on the "set" status when delivery.
2) The customer special requirement express as special code after evaluating by Hongfa.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PCB LAYOUT

Unit: mm


Outline Dimensions

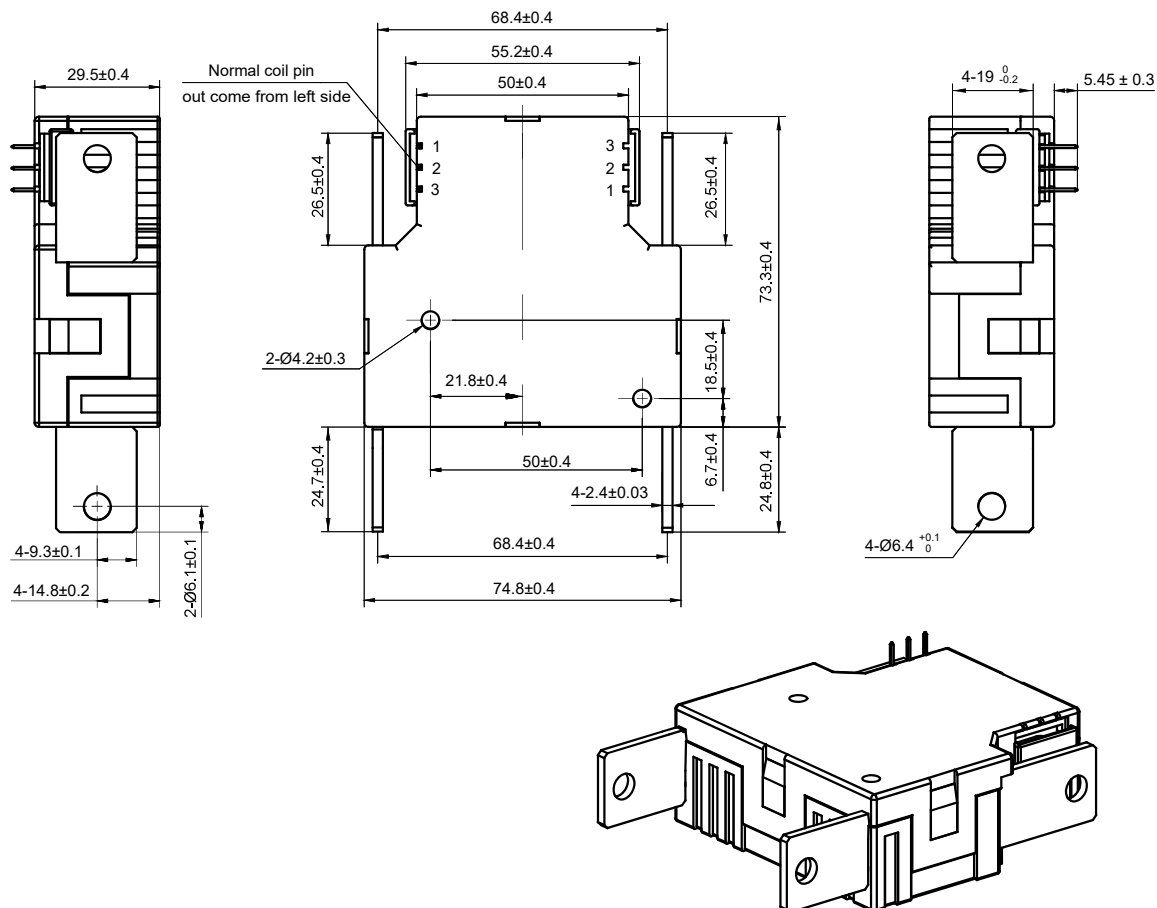

Positive polarity

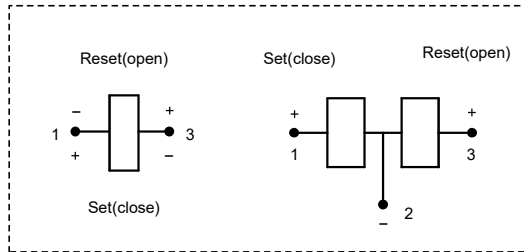

Negative polarity

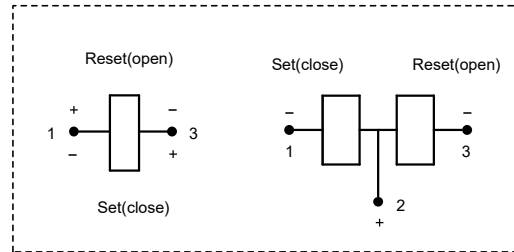

CAUTIONS

1. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
2. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
3. Normally the load terminals are not suitable for reflow solder, wave solder or tin solder, we suggest use spot welding. Load terminals shall be prevented from assembly stress, or freely move.
4. Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements. No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.