

HFZ20V-150P

EPOXY SEALED POLARITY SERIES DC RELAY



Features

- Rated 150A switching capability
- Coil does not require polarity, contact load has polarity
- The relay has epoxy resin encapsulation and sealing structure, which can work in explosive or hazardous environment, coils and contacts do not oxidize and contaminate the environment.
- Pre-charging and other applications
- Small size, light weight

RoHS compliant

CONTACT DATA

Contact arrangement	1SH
Contact resistance	3mΩ max. (typ. 0.5mΩ)(6VDC,20A)
Nominal current	150A
Rated load voltage	12~200VDC
Max. breaking current	1500A 200VDC (more than 1 time)
Max. switching power	300kW
Min. load	1A 12VDC
Standard continuous charged current	150A(50mm ²)
Short time overload current	200A 15min (50mm ²) 300A 3min (50mm ²) 400A 30s (50mm ²)
Mechanical endurance	1x10 ⁶ OPS
Electrical endurance	6 x 10 ³ OPS (150A 200VDC) Resistive load, 23°C, 1s on 9s off

COIL DATA

Nominal voltage (VDC)	12	24
Operating voltage (VDC)	9~16	18~32
Max. voltage (VDC)	16	32
Pick-up voltage (VDC)	≤9	≤18
Drop-out voltage (VDC)	≥1	≥2
Coil resistance x (1±7%)	26	96
Min. starting current (A)	0.46	0.25
Transient surge current (A)	--	--
Average holding current (A)	0.48	0.25
Steady-state power consumption (W)	Approx.5.5	Approx.6

Notes: Other rated voltages can be specially ordered.

CHARACTERISTICS

Insulation resistance	Between open contacts	1000MΩ (1000VDC)
	Between contact and coil	1000MΩ (1000VDC)
Dielectric strength	Between open contacts	2000Vrms
	Between coil & contacts	2000Vrms
Nominal voltage (VDC)	12	24
Operate time (ms)	≤30	≤30
Release time (ms)	≤10	≤10
Bounce time(ms)	≤5	≤5
Shock resistance	196 m/s ²	
Vibration resistance	10Hz to 500Hz 98m/s ²	
Ambient temperature	-40°C to 85°C	
Humidity	5% to 95%RH	
Protection grade	IP67	
Termination	The M5 internal thread	
Outline dimensions	54x40.3x60.3	
	53.3x41.1x60.1	
Weight	220g	

Notes: 1) The above values are the initial values at room temperature.
2) The test result can not meet the requirements of voltage resistance and insulation resistance.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2021 Rev. 1.00

ORDERING INFORMATION

Type	HFZ20	<input type="checkbox"/>	-150	P/	200-	12-	SH	S	A	L	5	Y	E	-1	(XXX)
Application	Nil: New Energy Power Control V : Vehicle														
Version	150: 150A														
Load polarity	P: polar														
Nominal voltage	900: 12~900VDC														
Coil voltage	12: 12VDC 24: 24VDC														
Contact arrangement	SH: 1 Form A(double-contact of 1 Form A)														
Contact material	S: Silver plated														
Auxiliary Contact Form	Nil: Without auxiliary contact A: Normally open auxiliary contact B: Normally closed auxiliary contact														
Coil terminal	L: Lead wire B: Lead wire with connector														
Load terminal	5: Internal thread mounting														
Installation method	Nil: Vertical Y: Horizontal														
Appearance and ttructure	E: Simplified shell structure														
Sort	1: 1 coil														
Special code ¹⁾	XXX: Customer special requirement Nil: Standard														


Notes: 1) The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions


Vertical

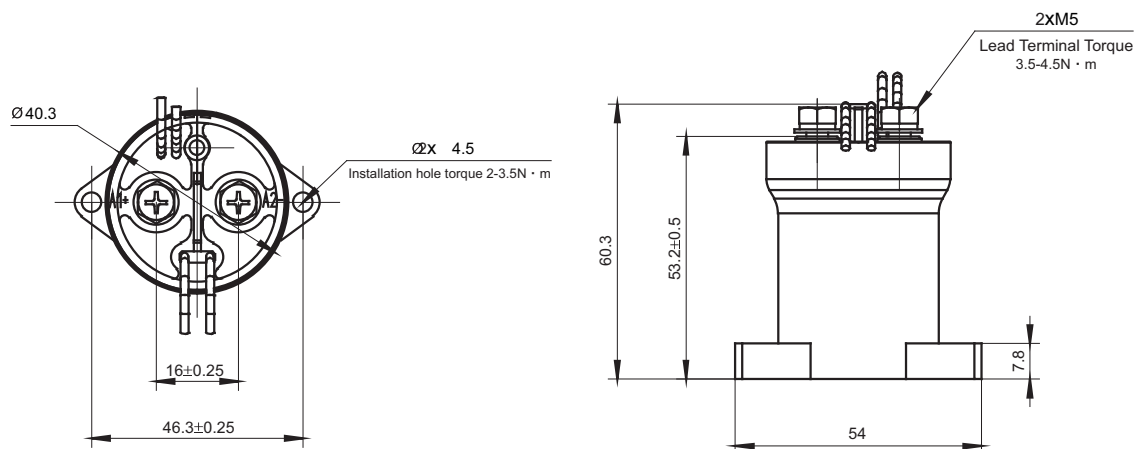


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Horizontal

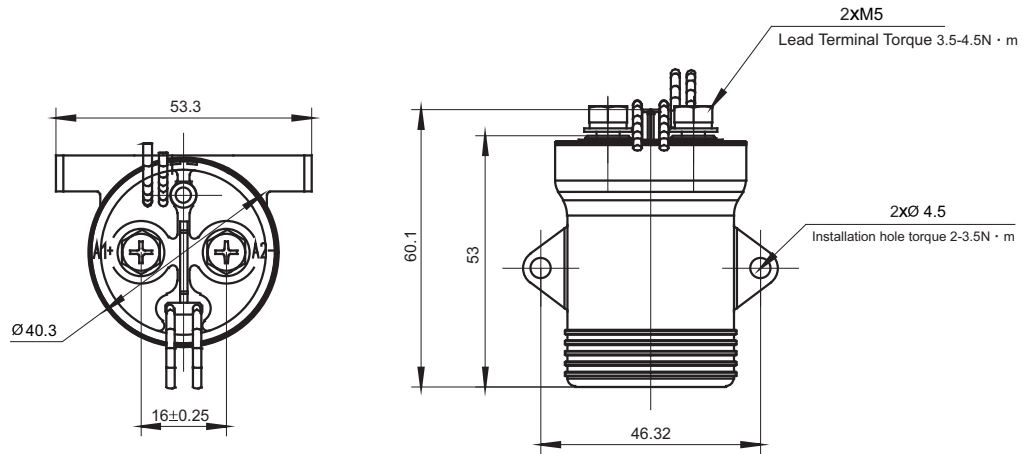

PCB Layout (Bottom view)

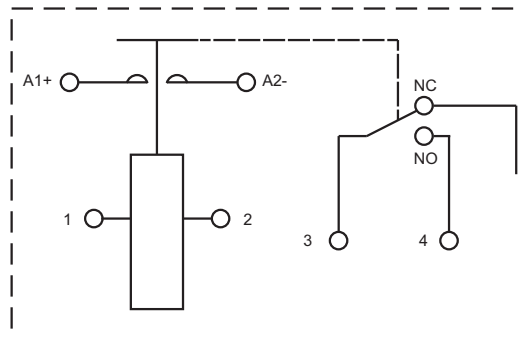


A1, A2 are the load terminals; 1 and 2 are the coil terminals; polarity on the load terminal and no polarity the coil terminal.

Notes: 1) Dimension tolerance is not indicated for part of the overall dimension of the product. When the overall dimension is less than or equal to 10 mm, the tolerance is ± 0.3 mm; When the overall dimension is between (10 ~ 50) mm, the tolerance is ± 0.5 mm; When the overall dimension is greater than or equal to 50 mm, the tolerance is ± 0.8 mm.
2) L: Coil lead specifications: UL3398, 20AWG, black; Line length 300mm.
3) B: Line outlet + connector (See Figure).

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

B:Line outlet + connector

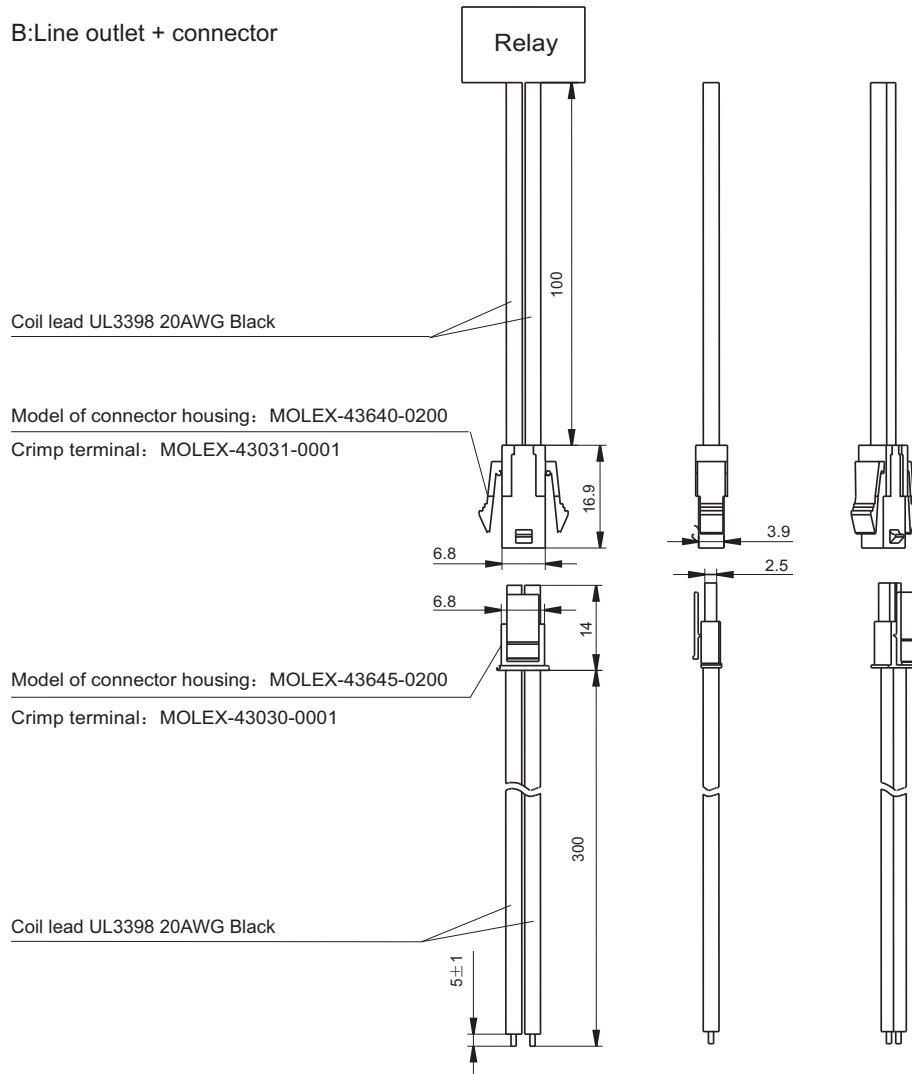


CHARACTERISTIC CURVES

Current carrying capacity

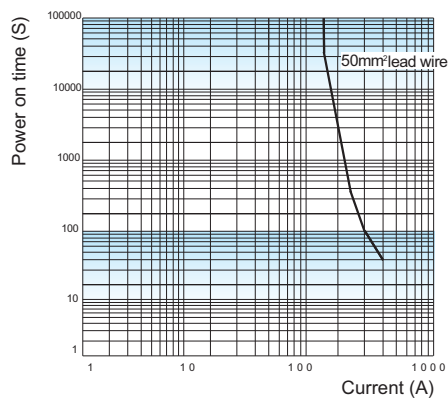

Notes: The above data are measured at room temperature for your reference only. Do not use it to select a fuse directly.


Load switching capability

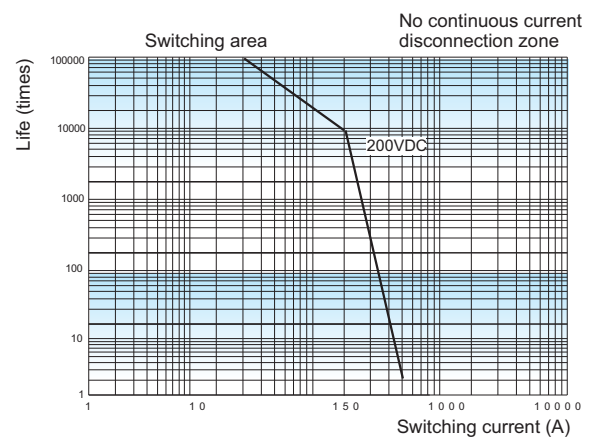

Notes: Resistive load
Insulation after electrical life test $\geq 50\text{M}\Omega$ (500VDC)
As the lifetime is related to many factors, it is recommended to verify the ratings according to the actual application.

Precautions for use

1. In order to suppress the relay coil reverse electromotive force, suggest to connect the coil with nonlinear resistor parallelly (variable resistance is recommended to use, maximum energy tolerance $> 1 \text{ J}$, voltage in 1.5-2 times of the rated voltage, if use diode, the release time will greatly lengthen and degrade the cutting performance. (Energy-saving products have built-in suppression reverse electromotive force circuit, surge suppression devices are not required)
2. The rated values of contact parameters are tested under resistive load. In the case of inductive load with $L/R > 1 \text{ ms}$, please connect inrush current protection devices for this load. If no measures are taken, electrical durability may decrease and on-off failure may occur. Please leave enough space when design.
3. As a HVDC switching device, it may fail at high temperature when the lifetime and load capacity exceed parameters specified in the manual. The protective circuit which can cut off the load in case of emergency shall be adopted. As a product with limited life, it should be replaced in time to ensure safety.
4. Please avoid grease and other foreign bodies on the terminal, and use connecting wires of 50 mm^2 or above; When installing the load terminal, ensure that the power cable is close to the lead terminal. Install and tighten it in the sequence of flat washer, spring washer and nut, or directly use the self-locking nut. Contamination of the lead terminal or incorrect connection sequence can cause severe overheating and melting of the insulation of the connection cable.
5. Please use washers to prevent looseness during installation. Please control the locking torque within the recommended range. If it exceeds the range, it may cause damage to the shell. When using screws, make sure the gasket is thick and strong enough, otherwise it will deform and burst the casing.

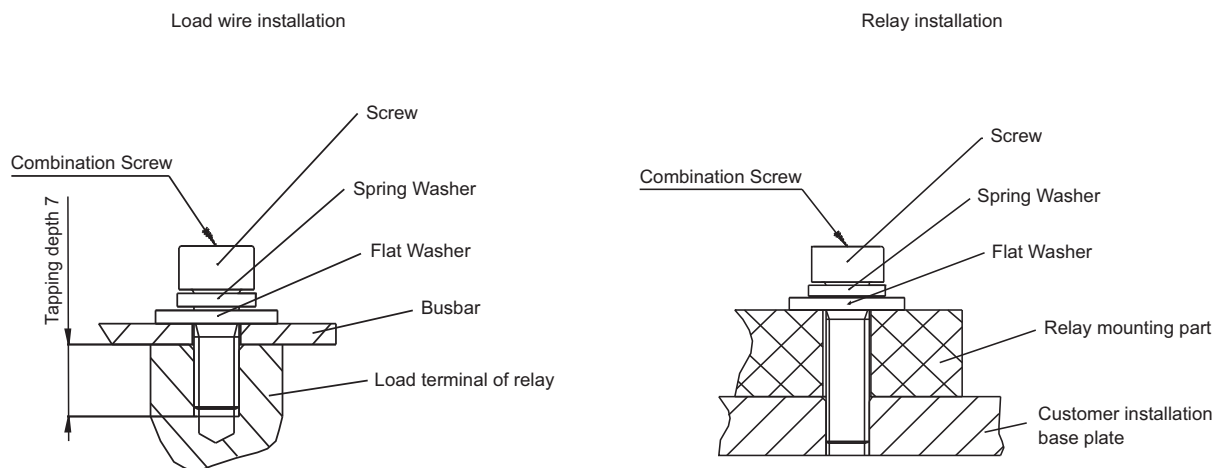

Notes: Tapping depth of load internal thread M5 is 7mm.

Disclaimer

The specification is for reference only. See "Terminology and Guidelines" for more information. Specifications subject to change without notice. In case there is specific criterion (such as mission profile, technical specification, PPAP etc.) checked and agreed by and between customer and Hongfa, this specific criterion should be taken as standard regarding any requirement on Hongfa product.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.