
HFD23 SUBMINIATURE SIGNAL RELAY

File No.:E133481

File No.:R50306254

File No.:CQC09002035070



Features

- Max.4A switching capability
- High sensitive: 150mW
- 1 Form C configuration
- Gold plated contact
- Subminiature
- Plastic sealed type available
- 90°C high temperature specifical for selection

RoHS compliant

CONTACT DATA

Contact arrangement	1A	1C
Contact resistance	100mΩ max. (at 10mA 30mVDC)	
Contact material	AgNi +Au plated	
Contact rating (Res. load)	1A 125VAC/2A 30VDC	0.5A 125VAC/1A 30VDC
Max. switching voltage	125VAC / 60VDC	
Max. switching current	4A	2A
Max. switching power	125VA / 60W	62.5VA / 30W
Min. applicable load 1)	1mA 5V	
Mechanical endurance	1 x 10^7OPS	
Electrical endurance 2)	1 x 10^5OPS (1H:1A 125VAC; 1Z:0.5A 125VAC, Resistive load., Room temp., 1s on 9s off)	

Notes: 1) Min. applicable load is reference value. Please perform the confirmation test with the actual load before production since reference value may change according to switching frequencies, environmental conditions and expected contact resistance and reliability.

2) Electric endurance data are collected in the NO or NC contact test.

CHARACTERISTICS

Insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	1000VAC 1min
	Between open contacts	500VAC 1min
Operate time (at rated. volt.)		5ms max.
Release time (at rated. volt.)		5ms max.
Temperature rise (at rated.volt.)		65K max.
Vibration resistance		10Hz to 55Hz 3.3mm DA
Shock resistance	Functional	196m/s²
	Destructive	980m/s²
Humidity		5% to 98% RH
Ambient temperature		-40°C to 85°C -40°C to 90°C(high temperature)
Unit weight		Approx. 2.2g
Termination		THT
Construction		Plastic sealed

Notes: 1) The data shown above are initial values.

COIL

Coil power	Sensitive: Approx. 150mW; Standard: Approx. 200mW

COIL DATA at 23°C

Standard type

Nominal Voltage VDC 1)	Initial Pick-up Voltage VDC max. 1)	Initial Drop-out Voltage VDC min.	Max. Voltage VDC 5)	Coil Resistance Ω
1.5	1.13	0.15	3.0	11.3 x (1±10%)
2.4	1.80	0.24	4.8	28.8 x (1±10%)
3 3)	2.25	0.30	6.0	45 x (1±10%)
4.5	3.38	0.45	9.0	101.3 x (1±10%)
5 3)	3.75	0.50	10	125 x (1±10%)
6	4.50	0.60	12	180 x (1±10%)
9	6.75	0.90	18	405 x (1±10%)
12	9.00	1.20	24	720 x (1±10%)
24	18.00	2.40	48	2880 x (1±15%)


Sensitive type

Nominal Voltage VDC 1)	Initial Pick-up Voltage VDC max. 1)	Initial Drop-out Voltage VDC min.	Max. Voltage VDC 5)	Coil Resistance Ω
1.5	1.13	0.15	3.0	15 x (1±10%)
2.4	1.80	0.24	4.8	38.4 x (1±10%)
3 3)	2.25	0.30	6.0	60 x (1±10%)
4.5	3.38	0.45	9.0	135 x (1±10%)
5 3)	3.75	0.50	10	167 x (1±10%)
6	4.50	0.60	12	240 x (1±10%)
9	6.75	0.90	18	540 x (1±10%)
12	9.00	1.20	24	960 x (1±10%)
24	18.00	2.40	48	3840 x (1±15%)

COIL DATA

at 23˚C

Notes:1) The data shown above are initial values.
2) To supply rated step voltage to coil is the foundation of relay proper operation. Please make sure the applied voltage to the coil reach at rated values.
Please refer to the typical diagram below for single side stable relay. The "V_coil" is the rated voltage:

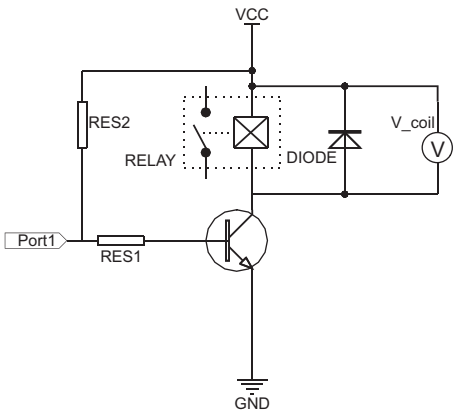

3) In case 5V of transistor drive circuit, it is recommended to use 4.5V type relay, and 3V to use 2.4V type relay.
4) For monostable relays, if you need to drop down voltage and hold mode after reliably operating,make sure that the effective value of holding voltage is not less than 60% of the rated voltage.
5) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.
6) When user's requirements can't be found in the above table, special order allowed.
7) During the relay pick-up or drop-out processes, there are stages of contact pressure change, contact vibration and unstable contact etc. When the voltage applied to coil is gradually changed, it will lengthen the unstable stage and affect relay endurance. To reduce this influence, please apply step voltage(switching circuit) to relay coil.

SAFETY APPROVAL RATINGS

UL/CUL	1H type: 2A 30VDC 40 ˚C 1A 125VAC 40 ˚C 1A 30VDC 90 ˚C 0.5A 125VAC 90 ˚C	1Z type: 1A 30VDC 85 ˚C 0.5A 48VDC 70 ˚C 0.5A 125VAC 85 ˚C 1A 30VDC 90 ˚C 0.5A 125VAC 90 ˚C

Notes: 1) All values unspecified are at room temperature.
2) Only typical loads are listed above. Other load specifications can be available upon request.

ORDERING INFORMATION

	HFD23 /	012	-1Z	S	(XXX)
Type					
Coil voltage	1.5, 2.4, 3, 4.5, 5, 6, 9, 12, 24VDC				
Contact arrangement	**1H**: 1 Form A	**1Z:** 1 Form C			
Coil power	**S:** Sensitive type	**P:** Standard type			
Special code[2]	**XXX:** Customer special requirement	**Nil:** Standard	**866:**High temperature type[3]		

Notes: 1) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
2) The customer special requirement express as special code after evaluating by Hongfa.
3) The high temperature type indicates the maximum ambient temperature 90˚C and the high temperature type is 866. It is only suitable for sensitive specifications.
4) This product is suitable for wave soldering or manual soldering.
5) Please make sure that there are no silicon-based substances (such as silicon rubber, silicone oil, silicon-based coating agents, silicon fillers, etc.) around the relay, because it will generate silicon-containing volatile gas, which may cause poor contact in case of silicon-containing volatile gas sticking on contact.Flux proofed and dust cover type relays are prohibited in environments with water vapor and harmful gases (P, Cl, H_2S, SO_2, NO_2). Plastic sealed relays shall be used with practical test verification.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions


Wiring Diagram
(Bottom view)

PCB Layout
(Bottom view)

HFD23/1Z type

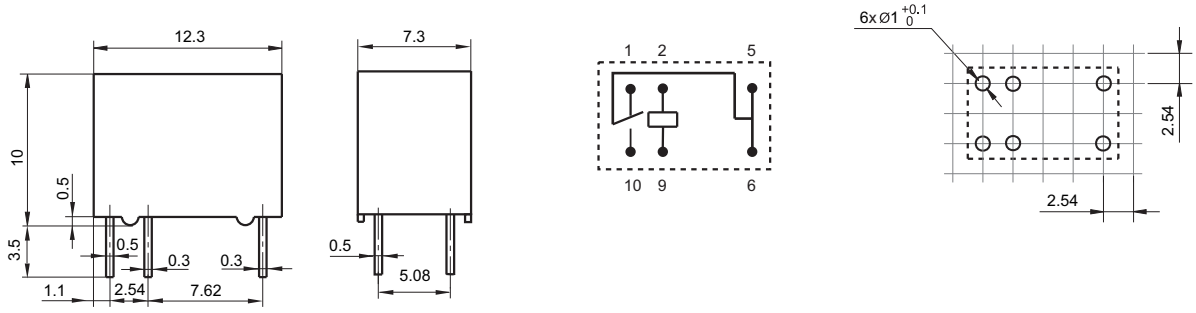


HFD23/1H type

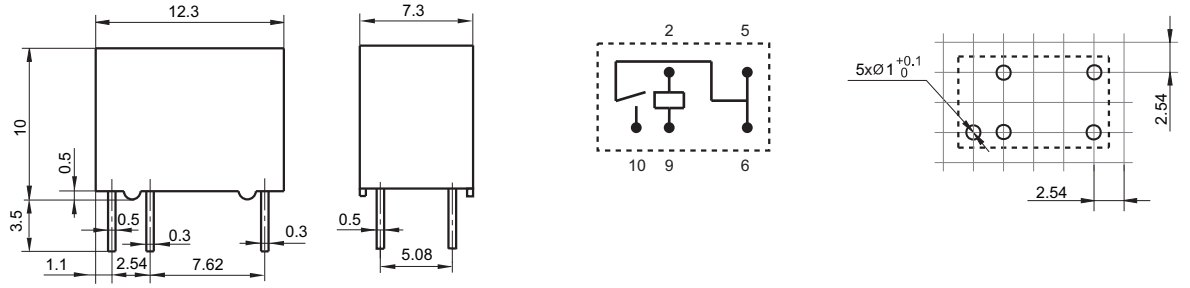


Remark: 1) The pin dimension of the product outline drawing is the size before tinning (it will become larger after tinning), and the mounting hole size is the recommended design size of the PCB board hole. The specific PCB board hole design size can be mapped and adjusted according to the actual product.
2) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.
3) The tolerance without indicating for PCB layout is always ±0.1mm.
4) The width of the gridding is 2.54mm.
5) 1C type has six Terminals,1A type has five Terminals.

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER



ENDURANCE CURVE

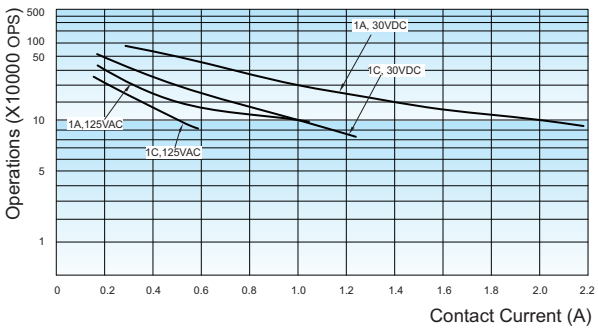

Test conditions:
Resistive load, Room temp., 1s on 9s off.

CHARACTERISTIC CURVES

Notice

1) To avoid using relays under strong magnetic field which will change the parameters of relays such as pick-up voltage and drop-out voltage.
2) Energizing coil with rated voltage is basic for normal operation of a relay, please make sure the energized voltage to relay coil have reached therated voltage.
3) For a monosteady state relay, after the relay is reliably operated, if it needs to be kept under pressure, make sure that the effective value of the voltage is not less than 60 % of the rated voltage;
4) The relay may be damaged because of falling or when shocking conditions exceed the requirement.
5) Please use wave soldering or manual soldering for straight-in relay.
6) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
7) Regarding the plastic sealed relay, we should leave it cooling naturally untill below 40°C after welding, then clean it and deal with coating, remarkably the temperature of solvents should also be controlled below 40°C.Please avoid cleaning the relay by ultrasonic, avoid using the solvents like gasoline, Freon, and so on, which would affect the configuration of relay or influence the environment.
8) When applied with continuous current, the heat from relay coil will age its isolation. Thus, please do not ground connected the coil to reduce electrical errosion if possible. And please provide protection circuit to avoid broken wire and losses.
9) Please make sure that there are no silicon-based substances (such as silicon rubber, silicone oil, silicon-based coating agents, silicon fillers, etc.) around the relay, because it will generate silicon-containing volatile gas, which may cause poor contact in case of silicon-containing volatile gas sticking on contact.Flux proofed and dust cover type relays are prohibited in environments with water vapor and harmful gases (P, Cl, H_2S, SO_2, NO_2). Plastic sealed relays shall be used with practical test verification.
10) About preferable condition of operation, storage and transportation, please refer to "Explanation to terminology and guidetines of relay".
11) During the relay pick-up or drop-out processes, there are stages of contact pressure change, contact vibration and unstable contact etc. When the voltage applied to coil is gradually changed, it will lengthen the unstable stage and affect relay endurance. To reduce this influence, please apply step voltage(switching circuit) to relay coil.

Disclaimer
The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.