

## Specifications



## Contactor, UEC1-40D, 3P (3NO), AC/DC Coil

### Main

Product Series	UEC1
Product or Component Type	Contactor
Device Short Name	UEC1-40D
Contactor Application	Motor control Resistive load
Utilisation Category	AC-3 AC-4 AC-1
Poles Description	3P
Rated Operational Voltage [Ue]	Power circuit: $\leq 690$ V AC 50/60Hz
Rated Operational Current [Ie]	40 A (at $\leq 60$ °C) at $\leq 400$ V AC AC-3 for power circuit 60 A (at $\leq 60$ °C) at $\leq 690$ V AC AC-1 for power circuit
[Us] Control Circuit Voltage (AC 50/60Hz)	Voltage (V)(AC/DC): 24-60 100-250 Code: BNE KUE

### Complementary

Motor Power kW	11 kW at 220/230 V AC 50/60 Hz (AC-3) 18.5 kW at 380/400 V AC 50/60 Hz (AC-3) 30 kW at 660/690 V AC 50/60 Hz (AC-3)
Motor Power hp	3 hp at 110...120 V AC 50/60 Hz for 1 phase motors 5 hp at 200...208 V AC 50/60 Hz for 1 phase motors 7.5 hp at 220...240 V AC 50/60 Hz for 1 phase motors 10 hp at 200...208 V AC 50/60 Hz for 3 phases motors 15 hp at 220...240 V AC 50/60 Hz for 3 phases motors 30 hp at 440...480 V AC 50/60 Hz for 3 phases motors 40 hp at 550...600 V AC 50/60 Hz for 3 phases motors
Pole Contact Composition	3 NO

Conventional Free Air Thermal Current [Ith]	60 A (at $\leq 60$ °C) for power circuit 10 A (at $\leq 60$ °C) for signalling circuit
Rated Short-Time Withstand Current [Icw]	320 A $\leq 40$ °C - 10 s for power circuit 720 A $\leq 40$ °C - 1 s for power circuit 72 A $\leq 40$ °C - 10 min for power circuit 165 A $\leq 40$ °C - 1 min for power circuit
Associated Fuse Rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 63 A gG at $\leq 690$ V coordination type 2 for power circuit
Average Impedance	1.5 m $\Omega$ - Ith 50 Hz for power circuit
[Ui] Rated Insulation Voltage	Power circuit: 690 V conforming to IEC 60947-4-1 Power circuit: 600 V UL Certified Signalling circuit: 690 V conforming to IEC 60947-5-1 Signalling circuit: 600 V UL Certified
Overvoltage Category	III
Pollution Degree	3
[Uimp] Rated Impulse Withstand Voltage	6 kV conforming to IEC 60947
Mechanical Durability	5 M cycles
Electrical Durability	1.2 M cycles 40 A AC-3 at $U_e \leq 400$ V
Control Circuit Type	AC/DC
Coil Technology	With built-in suppressor module
Control Circuit Voltage Limits	0.85 $U_{smin}$ ...1.1 $U_{smax}$ (-40...60 °C): operational 0.1 $U_{smax}$ ...0.75 $U_{smin}$ (-40...60 °C): drop-out
Inrush Power in VA	150VA (at 25 °C)
Inrush Power in W	150W (at 25 °C)
Hold-in Power Consumption in VA	5VA (at 25 °C)
Hold-in Power Consumption in W	5W (at 25 °C)
Operating Time	Power circuit: 40...60 ms closing, 18...60 ms opening Signalling circuit (NO): 40...60 ms closing, 18...60 ms opening Signalling circuit (NC): 32...55 ms opening, 22...65 ms closing
Maximum Operating Rate	Electrical: 600 cycs/h Mechanical: 1800 cycs/h
Connections - Terminals	Power circuit: screw clamp terminals 1 2.5...35 mm <sup>2</sup> (AWG 14...2)- cable stiffness: flexible without cable end Power circuit: screw clamp terminals 2 2.5...16 mm <sup>2</sup> (AWG 14...6) - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 1 2.5...25 mm <sup>2</sup> (AWG 14...4) - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 2 2.5...16 mm <sup>2</sup> (AWG 14...6) - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 1 2.5...35 mm <sup>2</sup> (AWG 14...2) - cable stiffness: solid without cable end Power circuit: screw clamp terminals 2 2.5...25 mm <sup>2</sup> (AWG 14...4) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> (AWG 18...12)

- cable stiffness: flexible without cable end

Control circuit: screw clamp terminals 2 1...4 mm<sup>2</sup> (AWG 18...12)

- cable stiffness: flexible without cable end

Control circuit: screw clamp terminals 1 1...4 mm<sup>2</sup> (AWG 18...12)

- cable stiffness: flexible with cable end

Control circuit: screw clamp terminals 2 1...2.5 mm<sup>2</sup> (AWG

18...14) - cable stiffness: flexible with cable end

Control circuit: screw clamp terminals 1 1...4 mm<sup>2</sup> (AWG 18...12)

- cable stiffness: solid without cable end

Control circuit: screw clamp terminals 2 1...4 mm<sup>2</sup> (AWG

18...12)- cable stiffness: solid without cable end

Tightening Torque	Power circuit: 45 lb.in (5 N·m) - on bolt clamp terminals - with internal hexagon socket wrench 4 mm Control circuit: 11 lb.in (1.2 N·m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 11 lb.in (1.2 N·m) - on screw clamp terminals - with screwdriver Philips No 2
Auxiliary Contact Composition	1NO1NC, 2NO2NC, other combinations can be customized
Minimum Switching Voltage	24 V for signalling circuit
Minimum Switching Current	0.1A for signalling circuit
Insulation Resistance	> 10 MΩ for signalling circuit
Mounting Support	Screw 35mm or 75mm DIN Rail

## Environment

Standards	GB/T 14048.4, GB/T 14048.5, IEC/EN 60947-4-1, IEC/EN 60947-5-1, BS EN 60947-4-1, BS EN 60947-5-1, UL 60947-4-1, UL 60947-5-1
Product Certifications	CCC, CE, UKCA, VDE, UL (cULus LISTED)
IP Degree of Protection	IP20 front face conforming to IEC 60529
Permissible Ambient Air Temperature Around the Device	-40...60 °C for normal operating 60...70 °C with derating (for operation in the range of Us...1.1Us) Storage: -60...80 °C
Operating Altitude	0...3000 m without derating
Fire Resistance	Current-carrying parts: 850 °C conforming to IEC 60695-2-11
Height	112.5 mm
Width	63 mm
Depth	132 mm
Net Weight	1.0 kg

## Packing Units

Unit Type of Package 1	1 box
------------------------	-------

Number of Units in Package 1	1 pcs
Package 1 Height	14.6 cm
Package 1 Width	7.2 cm
Package 1 Length	12.2 cm
Package 1 Weight	1.05 kg
Unit type of Package 2	1 carton
Number of Units in Package 2	12 pcs
Package 2 Height	18.8 cm
Package 2 Width	32.5 cm
Package 2 Length	41.5 cm
Package 2 Weight	13.80 kg

### Offer Sustainability

REACH Regulation	Conforming
EU RoHS Directive	Conforming
Mercury Free	Yes
China RoHS Regulation	Conforming
RoHS Exemption Information	Yes

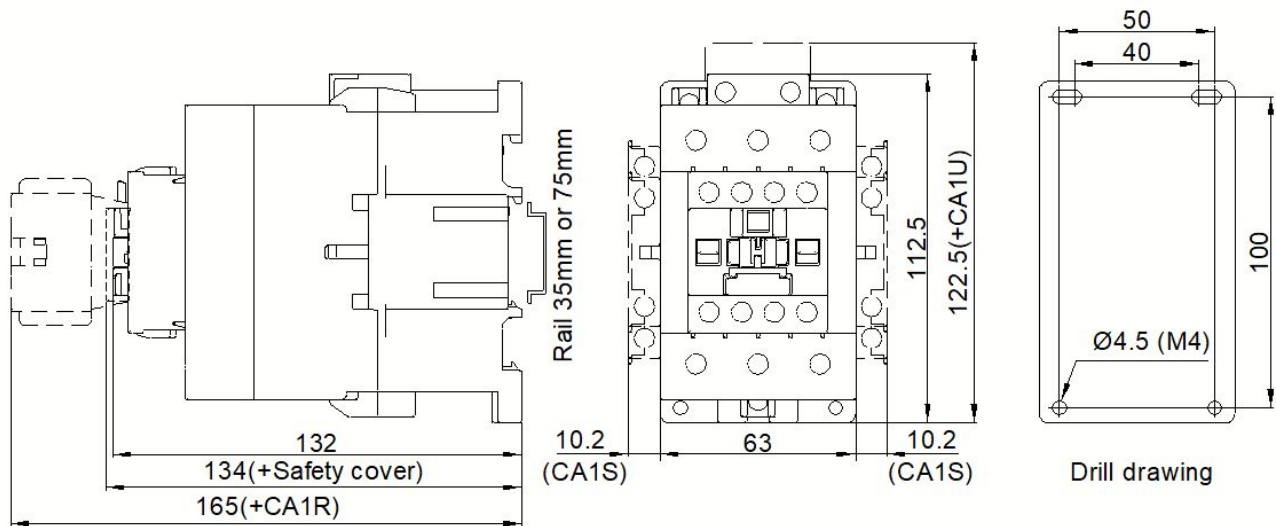
### Contractual Warranty

Warranty	18 months
----------	-----------

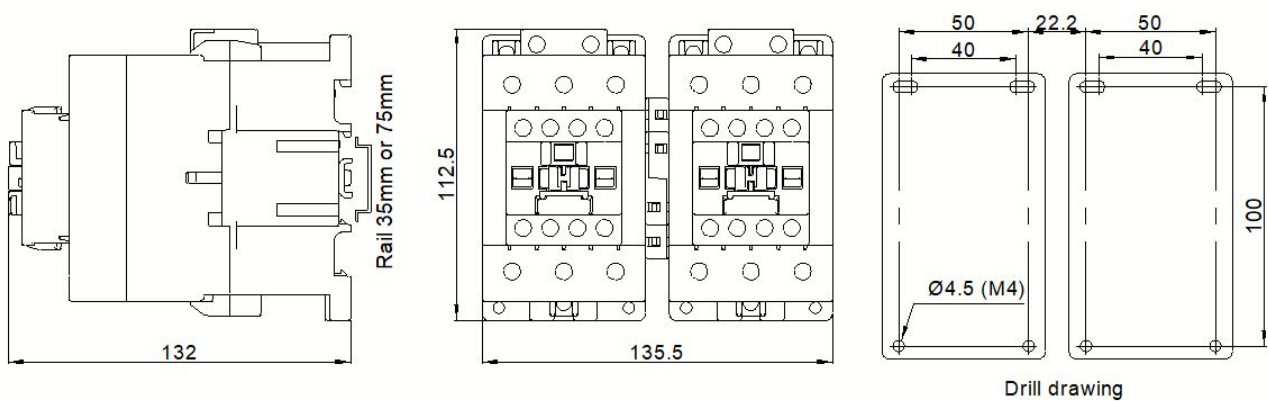
## Dimensions

UEC1-40...65 (3P, AC/DC Coil)

AC Contactor:

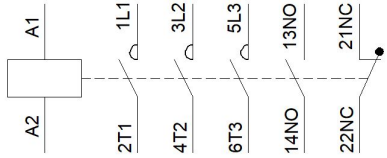
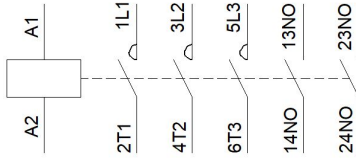
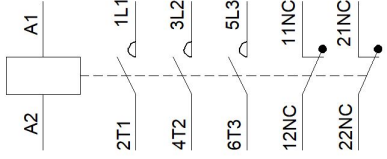
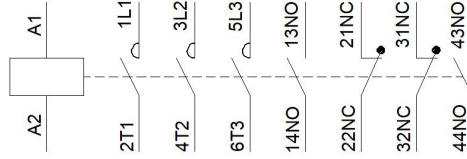
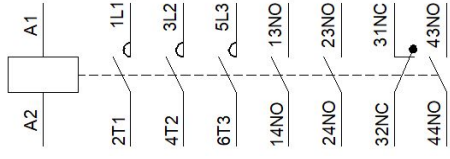
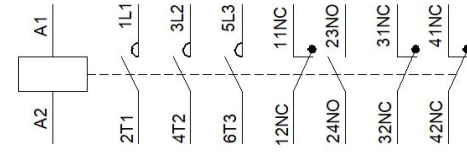
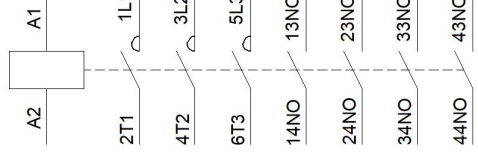
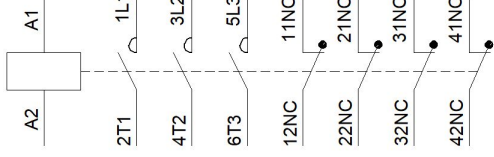


Interlock Contactor:











Note: The unit is mm. The tolerance for mounting holes:  $\pm 0.5$ ; for other external dimensions:  $\pm 1.5$ , unless otherwise specified.

## Wiring Diagram

AC contactor	
3P+1NO1NC	3P+2NO
	
3P+2NC	3P+2NO2NC
	
3P+3NO1NC	3P+1NO3NC
	
3P+4NO	3P+4NC
	

Top mounting auxiliary contact block (instantaneous auxiliary contact)

CA1R11 (1NO1NC)	CA1R20 (2NO)	CA1R02 (2NC)
		
CA1R22 (2NO2NC)	CA1R31 (3NO1NC)	CA1R13 (1NO3NC)
		
CA1R40 (4NO)	CA1R04 (4NC)	
		

Side mounting auxiliary contact block (instantaneous auxiliary contact)

CA1S11 (1NO1NC)	CA1S20 (2NO)	CA1S02 (2NC)
