

# HFE31

# HIGH POWER LATCHING RELAY



## Features

- 200A Latching relay
- Electrical endurance 5000ops
- According to ANSI 12.1  
(Carrying 7kA peak current/100ms)
- Contact resistance  $\leq 0.25m\Omega$

RoHS compliant

## CONTACT DATA

Contact arrangement	1A(Dual contact),1B(Dual contact)
Contact resistance <sup>1)</sup>	Typical value: <sup>2)</sup> $\leq 0.25m\Omega(200A)$
Contact material	AgSnO <sub>2</sub>
Contact rating	See "electrical endurance"
Max. switching voltage	276VAC
Max. switching current	200A
Max. switching power	55200W
Mechanical endurance	Meter: $1 \times 10^5$ ops

Notes:1) The data shown above are initial values.

2) Typical value: Sampling quantity for contact resistance shall not less than 20 pcs, take the average value from 5 continuous measurements for each sample.

## CHARACTERISTICS

Insulation resistance	1000M $\Omega$ (500VDC)	
Dielectric strength	Between coil and contact	4000VAC 1min
	Between open contacts	2000VAC 1min
Creepage distance	9.6mm	
Set time (at nomi. volt.)	$\leq 25ms$	
Reset time (at nomi. volt.)	$\leq 25ms$	
Shock resistance	Functional	98m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance	10Hz ~ 55Hz 1.5mm DA	
Humidity	5% ~ 85% RH	
Ambient temperature	-40°C ~ 85°C	
Termination	Coil termination	PCB、QC
	Load termination	QC
Unit weight	Approx.151g	
Construction	Dust protected	

Notes: The data shown above are initial values.

## COIL

Rated power	Single coil latching: Approx. 5.0W Double coils latching: Approx. 10W
-------------	--

## COIL DATA

23°C

### Single coil latching

Nominal Voltage VDC	Set / Reset Voltage <sup>1)2)</sup> VDC	Pulse Duration (Recommended) ms	Coil Resistance x (1 $\pm$ 10%) $\Omega$
6	$\leq 4.8$	50~100	7.2
9	$\leq 7.2$	50~100	16.2
12	$\leq 9.6$	50~100	28.8
24	$\leq 19.2$	50~100	115.2
48	$\leq 38.4$	50~100	460.8

### Double coils latching

Nominal Voltage VDC	Set / Reset Voltage <sup>1)2)</sup> VDC	Pulse Duration (Recommended) ms	Coil Resistance x (1 $\pm$ 10%) $\Omega$
6	$\leq 4.8$	50~100	3.6+3.6
9	$\leq 7.2$	50~100	8.1+8.1
12	$\leq 9.6$	50~100	14.4+14.4
24	$\leq 19.2$	50~100	57.6+57.6
48	$\leq 38.4$	50~100	230.4+230.4

Notes:1) The data shown above are initial values.

2) The above values are used as incoming inspection standards, and the recommended driving voltage is 1~1.5 times of the rated voltage.

## ELECTRICAL ENDURANCE

Voltage (Uc)	Current (Ic)	Power Factor	Close Open time (s)	Electrical endurance
240VAC	200A	COS $\phi$ =1	1:9	5000ops

Notes:1) Electrical endurance meet ANSI12.1 test requirement,do the inductive load test after the resistive load test.

2) Only some typical ratings of UC are listed above, if more special ratings required, please contact us.

## ORDERING INFORMATION

<b>HFE31 / 6 -SD 2 T -2 - R (XXX)</b>	
<b>Type</b>	
<b>Coil voltage</b>	6, 9, 12, 24, 48VDC
<b>Contact arrangement</b> <sup>1)</sup>	<b>SD:</b> 1 Form B(Dual contact) <b>SH:</b> 1 Form A(Dual contact)
<b>Termination</b>	<b>2:</b> No mounting aperture
<b>Contact material</b>	<b>T:</b> AgSnO <sub>2</sub>
<b>Coil type</b>	<b>1:</b> Single coil latching <b>2:</b> Double coils latching
<b>Polarity</b>	<b>R:</b> Reverse polarity <b>Nil:</b> Standard polarity
<b>Special code</b> <sup>2)</sup>	<b>XXX:</b> Customer special requirement


Notes: 1)SH means that relay is on the "reset" status when delivery; SD means that relay is on the "set" status when delivery. If no special required by customer, we will keep the relay on the "set" status when delivery.

2)The customer special requirement express as special code after evaluating by Hongfa.

## OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm

### Outline Dimensions

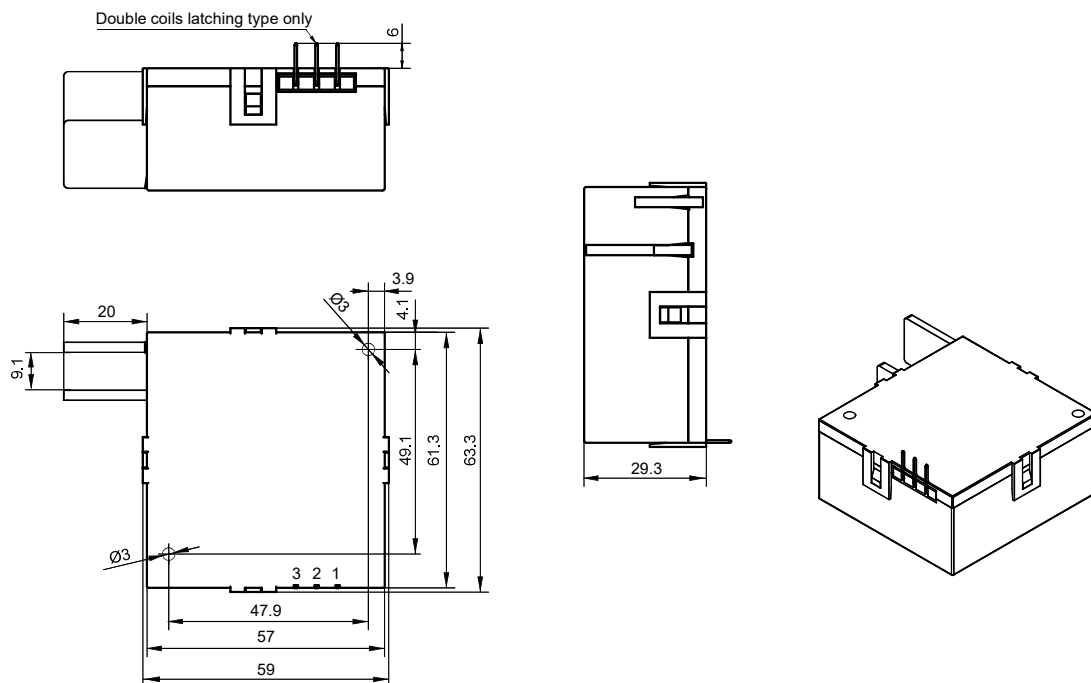


Remark: 1) The dimension of the load terminals as well as the sampling resistance can be made per customer request.


2) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.

Wiring Diagram

Standard polarity

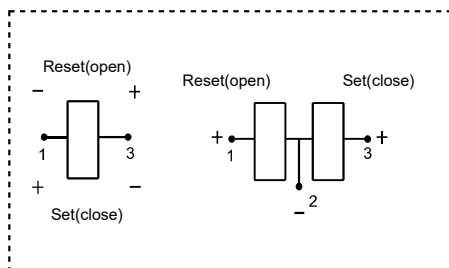

Reverse polarity

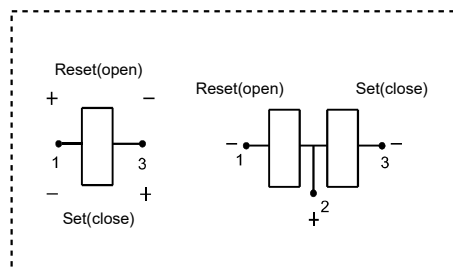

CAUTIONS

1. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
2. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
3. Normally the load terminals are not suitable for reflow solder, wave solder or tin solder, we suggest use spot welding. Load terminals shall be prevented from assembly stress, or freely move.
4. Relays used for metering measuring applications are usually made with dust proof structure, while most relays could be made specially per customer's specific requirements. No longer than 6 months' storage time is recommended for this kind of relay, and please pay attention to the storage environment. To ensure contact reliability, we will keep contact status be closed when delivery if no special required by customer.

Disclaimer

The specification is for reference only. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.